



# CrystalFontz America, Incorporated

## GRAPHIC OLED MODULE SPECIFICATIONS



|                           |   |
|---------------------------|---|
| CrystalFontz Model Number | <b>CFAL12864L-Y-B6TS</b>  |
| Hardware Version          | <b>Revision A, December 2009</b>  |
| Data Sheet Version        | <b>Revision 1.0, December 2009</b>  |
| Product Pages             | <a href="http://www.crystalfontz.com/product/CFAL12864LYB6TS.html">http://www.crystalfontz.com/product/CFAL12864LYB6TS.html</a> |

### CrystalFontz America, Incorporated

12412 East Saltese Avenue  
Spokane Valley, WA 99216-0357

Phone: 888-206-9720

Fax: 509-892-1203

Email: [techinfo@crystalfontz.com](mailto:techinfo@crystalfontz.com)

URL: [www.crystalfontz.com](http://www.crystalfontz.com)



## REVISION HISTORY

| HARDWARE   |                                     |
|------------|-------------------------------------|
| 2009/12/28 | Current hardware version: <b>vA</b> |

| DATA SHEET |  |
|------------|--|
| 2009/12/28 | Current Data Sheet version: <b>v1.0</b><br>New Data Sheet. |

### The Fine Print

Certain applications using CrystalFontz America, Inc. products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications"). CRYSTALFONTZ AMERICA, INC. PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. Inclusion of CrystalFontz America, Inc. products in such applications is understood to be fully at the risk of the customer. In order to minimize risks associated with customer applications, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazard. Please contact us if you have any questions concerning potential risk applications.

CrystalFontz America, Inc. assumes no liability for applications assistance, customer product design, software performance, or infringements of patents or services described herein. Nor does CrystalFontz America, Inc. warrant or represent that any license, either express or implied, is granted under any patent right, copyright, or other intellectual property right of CrystalFontz America, Inc. covering or relating to any combination, machine, or process in which our products or services might be or are used.

The information in this publication is deemed accurate but is not guaranteed.

Company and product names mentioned in this publication are trademarks or registered trademarks of their respective owners.

Copyright © 2009 by CrystalFontz America, Inc., 12412 East Saltese Avenue, Spokane Valley, WA 99216-0357 U.S.A.



## CONTENTS

|   |           |
|---|-----------|
| <b>MAIN FEATURES</b>  | <b>4</b>  |
| Demonstration and Evaluation Platform                                     | 4         |
| Comparison to LCD (Liquid Crystal Display) Module                         | 4         |
| Features  | 4         |
| Module Classification Information   | 5         |
| Ordering Information  | 5         |
| <b>MECHANICAL SPECIFICATIONS</b>  | <b>6</b>  |
| Physical Characteristics  | 6         |
| Module Outline Drawing  | 7         |
| <b>ELECTRICAL SPECIFICATIONS</b>  | <b>10</b> |
| System Block Diagram  | 10        |
| Circuit Example – $V_{\text{PANEL}}$ Externally Supplied for Display      | 11        |
| Power Up and Power Down Sequencing  | 11        |
| Absolute Maximum Ratings  | 12        |
| DC Characteristics  | 13        |
| Details of Interface Pin Function   | 14        |
| Photo Reference for Pin Functions   | 16        |
| ESD (Electro-Static Discharge)  | 17        |
| <b>OPTICAL SPECIFICATIONS</b>   | <b>18</b> |
| Optical Characteristics   | 18        |
| <b>OLED CONTROLLER INTERFACE</b>  | <b>19</b> |
| <b>MODULE RELIABILITY AND LONGEVITY</b>                                   | <b>19</b> |
| Module Reliability  | 19        |
| Module Longevity (EOL/Replacement Policy)                                 | 19        |
| <b>CARE AND HANDLING PRECAUTIONS</b>                                      | <b>20</b> |
| <b>APPENDIX A: QUALITY ASSURANCE STANDARDS</b>                            | <b>23</b> |
| <b>APPENDIX B: SAMPLE CODE</b>  | <b>26</b> |
| Sources For Driver Libraries  | 26        |
| Sample Code   | 26        |
| <b>APPENDIX C: OLED MODULE TERMS AND SYMBOLS</b>                          | <b>30</b> |
| <b>APPENDIX D: SOLOMON SYSTECH SSD1305 CONTROLLER SPECIFICATION SHEET</b> | <b>35</b> |

## LIST OF FIGURES

|   |    |
|---|----|
| Figure 1. Module Outline Drawing (3 pages below)        | 7  |
| Figure 2. System Block Diagram                          | 10 |
| Figure 3. Circuit Example – External Supply for Display | 11 |
| Figure 4. Power Up and Power Down Sequencing            | 11 |
| Figure 5. Photo Reference for Pin Functions             | 16 |
| Figure 6. CFAL12864L-Y-B6TS has a 160° Viewing Angle    | 19 |
| Figure 7. Limit Bend Radius of Touch Screen FFC         | 21 |



# MAIN FEATURES

---

## DEMONSTRATION AND EVALUATION PLATFORM

This module is available installed on a CrystalFontz CFA-10009 Demonstration PCB. The DMO-L12864LYB6TS kit has everything you need to easily demonstrate and experiment with the module. The kit can also be used as a reference for your designs. The *CFA10009 User Guide* can be found at the end of this Data Sheet.

## COMPARISON TO LCD (LIQUID CRYSTAL DISPLAY) MODULE

The CFAL12864L-Y-B6TS is a yellow 128 x 64 dot matrix Organic Light-Emitting Diode (OLED) display module. The small size, and ultrathin form factor of the CFAL12864L-Y-B6TS makes it possible to use this OLED module in applications where it would be difficult or impossible to fit a traditional LCD module. Because of the low power requirements, the CFAL12864L-Y-B6TS is suitable in battery powered portable devices such as remote controls and scientific meters (for example, temperature, sound, and gas detection).

Compared to most LCD modules, this OLED module has a quicker response time and an extremely wide viewing angle. At the low end of an STN LCD's temperature range, a module's contrast will typically be poor and the response time will be very slow. Unlike an STN LCD module, contrast does not diminish and response time is good at the lower end of an OLED module's operating temperature range, allowing it to operate in cold environments without a heater.

## FEATURES

- ☐ 128 x 64 module consists of a touch screen, an OLED panel, a COF (Chip on Flex) driver IC, and an FFC (Flat Flexible Cable) that mates with a ZIF connector.
- ☐ Module Dimensions
  - Active Area is 2.70" diagonal, 61.41 (W) x 30.69 (H) millimeters (2.42" (W) x 1.21" (H)).
  - Overall module dimension with touch screen FFC (Flat Flexible Cable) folded is 75.58 (W) x 68.00 (H) x 3.90 maximum (D) mm (2.98" (W) x 2.68" (H) x 0.15" maximum (D)).
  - Overall module dimension with touch screen FFC (Flat Flexible Cable) unfolded is 111.30 (W) x 68.00 (H) x 3.90 maximum (D) mm (4.38" (W) x 2.68" (H) x 0.15" maximum (D)).
- ☐ Four-wire analog touch screen.
- ☐ Requires 3v for logic and a separate supply for  $V_{\text{PANEL}}$ .
- ☐ 8-bit parallel (8080 or 6800) interface or SPI Interface.
- ☐ Built-in [Solomon Systech SSD1305](#) or compatible controller.
- ☐ Emissive monochrome display. Display yellow pixels on dark area or dark pixels on yellow area (if operating with display pixels reversed/inverted).
- ☐ Very high contrast ratio.
- ☐ Extremely wide viewing angle is  $>160^\circ$ .
- ☐ Wide temperature range for operation is  $-20^\circ\text{C}$  to  $+70^\circ\text{C}$ .
- ☐ RoHS compliant.









## MODULE CLASSIFICATION INFORMATION

CFA   L   128   64   L   -   Y   -   B6   TS  
 ①   ②   ③   ④   ⑤   ⑥   ⑦   ⑧

|   |                           |                            |
|---|---------------------------|----------------------------|
| ① | Brand                     | CrystalFontz America, Inc. |
| ② | Display Type              | L – OLED                   |
| ③ | Number of Pixels (Width)  | 128 pixels                 |
| ④ | Number of Pixels (Height) | 64 pixels                  |
| ⑤ | Model Identifier          | L                          |
| ⑥ | Display Color             | Y – Yellow                 |
| ⑦ | Special Code 1            | B6 – Manufacturer's code   |
| ⑧ | Special Code 2            | TS – Touch Screen          |

## ORDERING INFORMATION

| PART NUMBER                               | COLOR   |
|---|---|
| CFAL12864L-Y-B6TS*                        | yellow   |
| <i>Additional modules in this series.</i> |   |
| CFAL12864L-Y-B6                           | yellow  |
| CFAL12864L-G-B2                           | green   |
| CFAL12864L-G-B2TS*                        | green   |
| CFAL12864L-Y-B2                           | yellow  |
| CFAL12864L-Y-B2TS*                        | yellow  |
| CFAL12864L-G-B4                           | green   |
| CFAL12864L-Y-B4                           | yellow  |
| *Touch Screen                             |   |



## MECHANICAL SPECIFICATIONS


---

### PHYSICAL CHARACTERISTICS

| ITEM   | SIZE   |
|--|--|
| Pixels                                       |  |
| Number of Pixels                             | 128 x 64 pixels = 8,192 pixels   |
| Pixel Size                                   | 0.45 (W) x 0.45 (H) mm   |
| Pixel Pitch                                  | 0.48 (W) x 0.48 (H) mm   |
| Viewing Area Width and Height                | Millimeters: 63.41 (W) x 32.69 (H) mm<br>Inches: 2.50" (W) x 1.29" (H)                               |
| Active Area                                  |  |
| Diagonal                                     | Inches: 2.70"  |
| Width and Height                             | Millimeters: 61.41 (W) x 30.69 (H) mm<br>Inches: 2.42" (W) x 1.21" (H)                               |
| Overall Module Outline Dimensions            |  |
| Width with touch screen cable unfolded (FFC) | Millimeters: 111.30 mm<br>Inches: 4.38"  |
| Width with touch screen cable folded (FFC)   | Millimeters: 75.58 (W) mm<br>Inches: 2.98" (W)   |
| Height (includes Panel FFC)                  | Millimeters: 68.00 mm<br>Inches: 2.68"   |
| Module Depth                                 | Maximum:<br>Millimeters: 3.9 mm<br>Inches: 0.15"<br>Nominal:<br>Millimeters: 3.6 mm<br>Inches: 0.14" |
| Module Connector Pitch                       | 0.5 mm   |
| Touch Screen Connector Pitch                 | 1.0 mm   |
| Weight                                       | 50 grams (typical)   |




Figure 1. Module Outline Drawing (3 pages below)

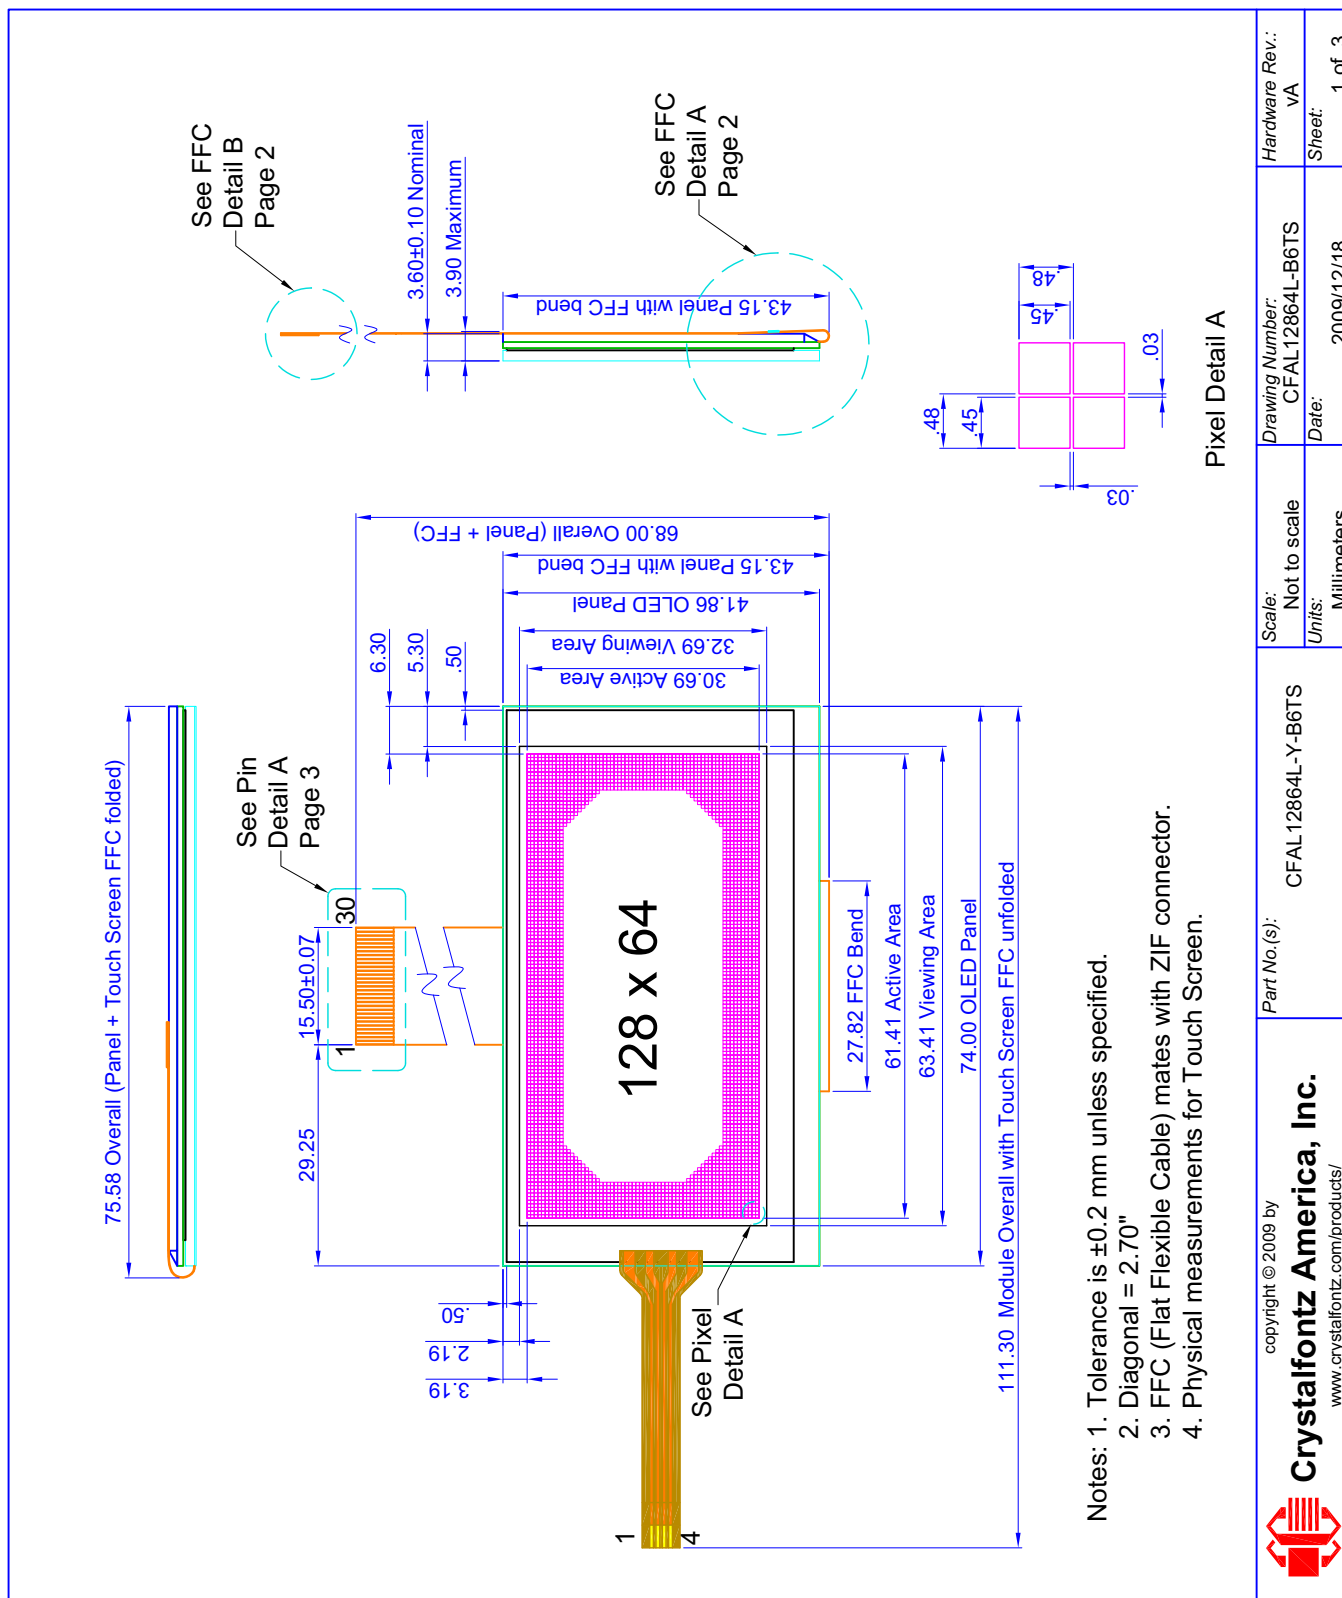




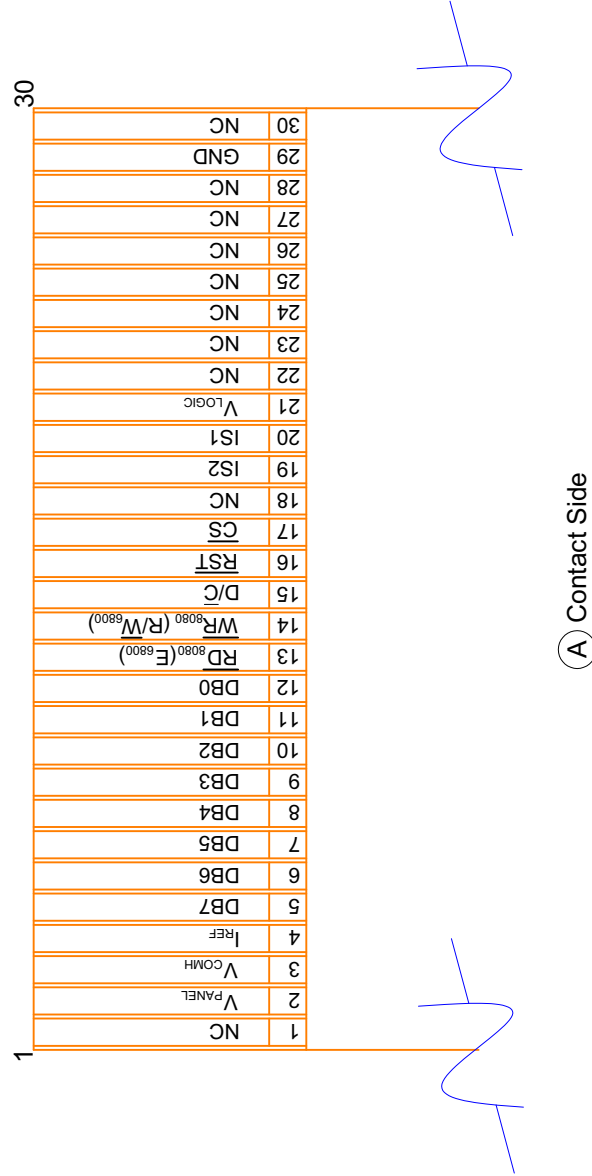
(A) FFC Detail

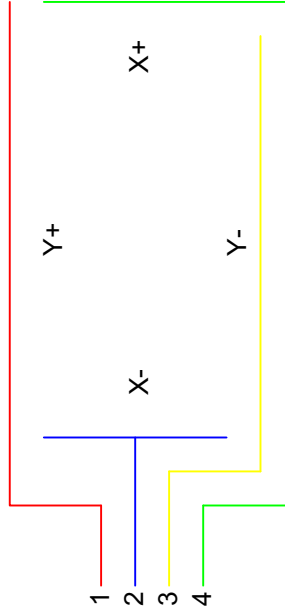


- Notes: 1. Tolerance is  $\pm 0.2$  mm unless specified.  
2. Diagonal = 2.70"  
3. COF = Chip On Flex.  
4. Physical measurements for Touch Screen.  
5. FFC (Flat Flexible Cable) mates with ZIF connector.

|  |                                   |   |   |  |
|--|-----------------------------------|---|---|--|
| <br>Crystalfontz America, Inc.<br><a href="http://www.crystalfontz.com/products/">www.crystalfontz.com/products/</a><br>copyright © 2009 by | Part No.(s):<br>CFAL12864L-Y-B6TS | Scale:<br>Not to scale<br>Units:<br>Millimeters | Drawing Number:<br>CFAL12864L-B6TS<br>Date:<br>2009/12/28 | Hardware Rev.:<br>vA<br>Sheet:<br>2 of 3 |
|  |                                   |   |   |  |





- Notes: 1. Tolerance is  $\pm 0.2$  mm unless specified.  
2. Diagonal = 2.70"  
3. FFC (Flat Flexible Cable) mates with ZIF connector.  
4. Physical measurements for Touch Screen.

|   |                                   |   |   |  |
|---|-----------------------------------|---|---|--|
| <br>copyright © 2009 by<br><b>Crystalfontz America, Inc.</b><br><a href="http://www.crystalfontz.com/products/">www.crystalfontz.com/products/</a> | Part No.(s):<br>CFAL12864L-Y-B6TS | Scale:<br>Not to scale<br>Units:<br>Millimeters | Drawing Number:<br>CFAL12864L-B6TS<br>Date:<br>2009/12/28 | Hardware Rev.:<br>vA<br>Sheet:<br>3 of 3 |
|   |                                   |   |   |  |



## ELECTRICAL SPECIFICATIONS

### SYSTEM BLOCK DIAGRAM

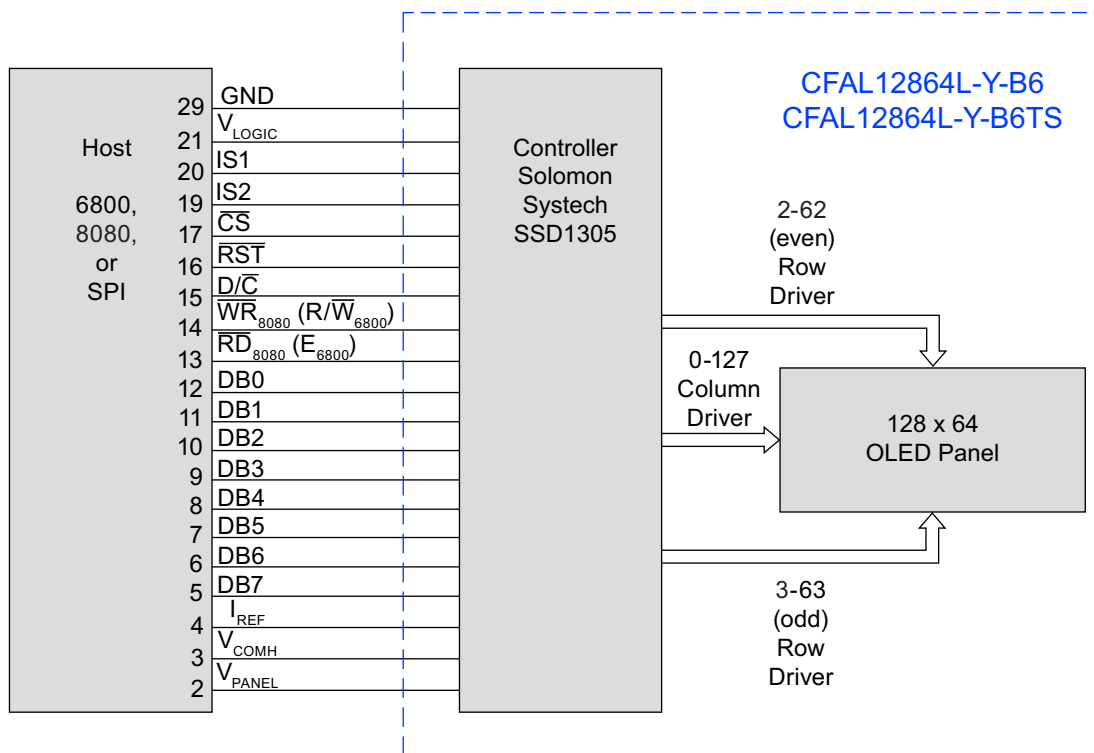


Figure 2. System Block Diagram



## CIRCUIT EXAMPLE – $V_{\text{PANEL}}$ EXTERNALLY SUPPLIED FOR DISPLAY

The [Micrel MIC2290](#) is one of many possible  $V_{\text{PANEL}}$  supply solutions.

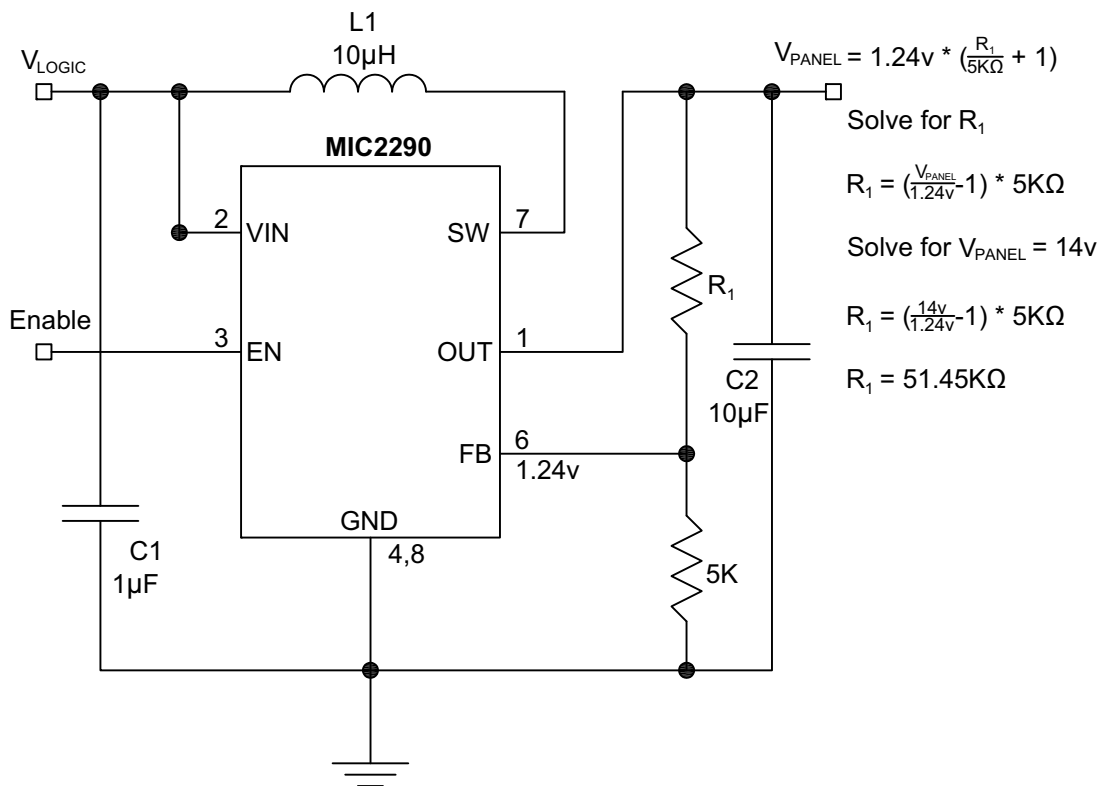


Figure 3. Circuit Example – External Supply for Display

Please refer to the Micrel MIC2290 datasheet for design details. See <http://micrel.com/page.do?page=/product-info/products/mic2290.shtml>.

## POWER UP AND POWER DOWN SEQUENCING

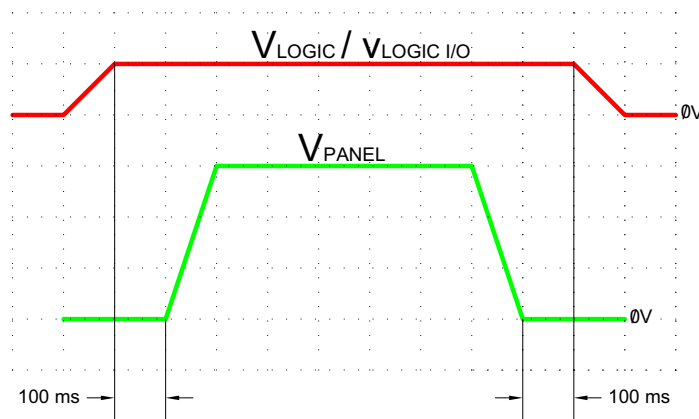


Figure 4. Power Up and Power Down Sequencing



## ABSOLUTE MAXIMUM RATINGS

| Ambient Temperature (Ta) = 25°C   |                    |         |         |
|---|--------------------|---------|---------|
| ABSOLUTE MAXIMUM RATINGS  | SYMBOL             | MINIMUM | MAXIMUM |
| Operating Temperature*  | T <sub>OP</sub>    | -20°C   | +70°C   |
| Storage Temperature*  | T <sub>ST</sub>    | -30°C   | +80°C   |
| Humidity  | RH                 | 0%      | 90%     |
| Logic Supply Voltage  | V <sub>LOGIC</sub> | -0.3v   | +4.0v   |
| Driver Supply Voltage   | V <sub>PANEL</sub> | +0v     | +16v    |
| Operating Current for V <sub>LOGIC</sub><br><i>Test conditions:</i><br>All pixels on<br>V <sub>LOGIC</sub> = +3.0v<br>V <sub>PANEL</sub> = +14.0v<br>Frame Rate = 104 Hz<br>Contrast Setting = 0xB0 | I <sub>CC</sub>    |         | 60 mA   |
| *Prolonged exposure at temperatures outside of this range may cause permanent damage to the module or decrease product lifetime.  |                    |         |         |



## DC CHARACTERISTICS

| DC CHARACTERISTICS  | TEST CONDITION   | SYMBOL             | MINIMUM  | TYPICAL | MAXIMUM   |
|---|--|--------------------|--|---------|---|
| Test Conditions for all tests below:<br>All pixels on<br>$V_{\text{LOGIC}} = +3.0\text{v}$<br>$V_{\text{PANEL}} = +14.0\text{v}$<br>Frame Rate = 104 Hz<br>Contrast Setting = 0xB0  |  |                    |  |         |   |
| Logic Supply Voltage  | $T_{\text{OP}} = -20^{\circ}\text{C}$ to $+70^{\circ}\text{C}$ | $V_{\text{LOGIC}}$ | +2.4v  | +3.0v   | +3.5v <sup>1</sup>  |
| OLED Driver Supply Voltage <sup>1</sup>   | $T_{\text{OP}} = -20^{\circ}\text{C}$ to $+70^{\circ}\text{C}$ | $V_{\text{PANEL}}$ | +12v   | +14v    | +14.85v   |
| Input High Voltage  |  | $V_{\text{IH}}$    | $+0.8\text{v} \times V_{\text{Logic}}$<br>For $V_{\text{Logic}} = +3.0\text{v}$<br>$V_{\text{IH}} = +0.8\text{v} \times +3.0\text{v} = +2.4\text{v}$ |         | $V_{\text{Logic}}$  |
| Input Low Voltage   |  | $V_{\text{IL}}$    | 0v (GND)   |         | $+0.2\text{v} \times V_{\text{Logic}}$<br>For $V_{\text{Logic}} = +3.0\text{v}$<br>$V_{\text{IL}} = +0.2\text{v} \times +3.0\text{v} = +0.60\text{v}$ |
| Output High Voltage   | $I_{\text{OUT}} = 0.5\text{mA}$<br>3.3MHz                      | $V_{\text{OH}}$    | $+0.9\text{v} \times V_{\text{Logic}}$<br>For $V_{\text{Logic}} = +3.0\text{v}$<br>$V_{\text{OH}} = +0.9\text{v} \times +3.0\text{v} = +2.7\text{v}$ |         | $V_{\text{Logic}}$  |
| Output Low Voltage  | $I_{\text{OUT}} = 0.5\text{mA}$<br>3.3MHz                      | $V_{\text{OL}}$    | 0v (GND)   |         | $+0.1\text{v} \times V_{\text{Logic}}$<br>For $V_{\text{Logic}} = +3.0\text{v}$<br>$V_{\text{OL}} = +0.1\text{v} \times +3.0\text{v} = +0.30\text{v}$ |
| <sup>1</sup> The $V_{\text{PANEL}}$ input must be a stable value with no ripple or noise.<br>This is a summary of the module's major operating parameters. For detailed information see <a href="#">APPENDIX D: SOLOMON SYSTECH SSD1305 CONTROLLER SPECIFICATION SHEET (Pg. 35)</a> . |  |                    |  |         |   |



## DETAILS OF INTERFACE PIN FUNCTION

| PIN | SIGNAL             | LEVEL           | DIRECTION | DESCRIPTION   |
|-----|--------------------|-----------------|-----------|---|
| 1   | NC                 |                 |           | No Connection.  |
| 2   | V <sub>PANEL</sub> | +12v to +14.85v |           | <p>Driver supply voltage. Only high voltage input on chip. Power must be supplied externally.</p> <p><i>Note: You must observe power sequencing for this signal. See <a href="#">Power Up and Power Down Sequencing (Pg. 11)</a>.</i></p> <p><i>Power Up</i> – Display must be powered up and initialized before power is applied to the signal.</p> <p><i>Power Down</i> – Power must be removed from this signal before the display is powered off</p>  |
| 3   | V <sub>COMH</sub>  |                 | O         | High level voltage output for common signals. A low ESR capacitor should be connected between this pin and GND. Do not connect external power supply directly to this pin.  |
| 4   | I <sub>REF</sub>   |                 | O         | Segment output current reference for brightness adjustment. A resistor should be connected between this pin and GND. Used to set the current.   |
| 5   | DB7                | H/L             | I/O       | <p>Bidirectional databus connects to 8-bit standard host databus.</p> <p><i>In serial mode (IS1=0, IS2=0):</i> DB0 serves as the serial clock input signal (SCL) and DB1 serves as the serial data input pin (SI). DB2-DB7 are high impedance. In serial mode, data can be written to the display but not read. Pin 14 (<math>\overline{WR}_{8080}</math> (<math>R/\overline{W}_{6800}</math>)) and Pin 13 (<math>\overline{RD}_{8080}</math> (<math>E_{6800}</math>)) are unused and should be tied low.</p> <p><i>In 6800 Parallel mode:</i> Pin 14 is used as <math>R/\overline{W}_{6800}</math>. Pin 13 is used as <math>E_{6800}</math>. Data is input or output on DB0-DB7.</p> <p><i>In 8080 Parallel mode:</i> Pin14 is used as <math>\overline{WR}_{8080}</math>. Pin 13 is used as <math>\overline{RD}_{8080}</math>. Data is input or output on DB0-DB7.</p> |
| 6   | DB6                | H/L             | I/O       |   |
| 7   | DB5                | H/L             | I/O       |   |
| 8   | DB4                | H/L             | I/O       |   |
| 9   | DB3                | H/L             | I/O       |   |
| 10  | DB2                | H/L             | I/O       |   |
| 11  | DB1                | H/L             | I/O       |   |
| 12  | DB0                | H/L             | I/O       |   |

Continued on next page.



| PIN                     | SIGNAL   | LEVEL | DIRECTION | DESCRIPTION   |
|-------------------------|--|-------|-----------|---|
| 13                      | $\overline{RD}_{8080}$ ( $E_{6800}$ )              | H/L   | I         | Host interface input.<br><br><i>8080 Host:</i> Active low. Signal on the databus is latched at the rising edge of $\overline{RD}$ signal.<br><br><i>6800 Host:</i> Enable control signal input active high.<br><i>E = High:</i> Read or Write Active<br><i>E = Low:</i> No Read or Write Active<br><br><i>SPI (serial) mode:</i> Connect to ground. |
| 14                      | $\overline{WR}_{8080}$ ( $R/\overline{W}_{6800}$ ) | H/L   | I         | Host interface input.<br><br><i>8080 Host:</i> Active low. Signal on the databus is latched at the rising edge of $\overline{WR}$ signal.<br><br><i>6800 Host:</i> read/write control signal output<br><i>R/W = High:</i> Read (Host←Module)<br><i>R/W = Low:</i> Write (Host→Module)<br><br><i>SPI (serial) mode:</i> Connect to ground.           |
| 15                      | $D/\overline{C}$                                   | H/L   | I         | Data/Command control. Determines whether data bits are data or command.<br><br><i>1 – High:</i> Addresses the data register.<br><br><i>2 – Low:</i> Addresses the command register.   |
| 16                      | $\overline{RST}$                                   | H/L   | I         | Reset signal.<br><br><i>Low:</i> Display controller is reset. The $\overline{RST}$ pin should be pulsed low shortly after power is applied.<br><br><i>High:</i> The $\overline{RST}$ pin should be brought high for normal operation.   |
| 17                      | $\overline{CS}$                                    | H/L   | I         | Chip select input.<br><br><i>Low:</i> Controller chip is selected. Communications with the host is possible.<br><br><i>High:</i> Controller chip is not selected. Host interface signals are ignored by the controller.   |
| 18                      | NC   |       |           | No Connection.  |
| Continued on next page. |  |       |           |   |



| PIN   | SIGNAL             | LEVEL          | DIRECTION | DESCRIPTION  |     |     |                |   |   |        |   |   |               |   |   |             |   |   |               |
|-------|--------------------|----------------|-----------|--|-----|-----|----------------|---|---|--------|---|---|---------------|---|---|-------------|---|---|---------------|
| 19    | IS2                | H/L            | I         | <table><tr><th>IS1</th><th>IS2</th><th>Interface Mode</th></tr><tr><td>0</td><td>0</td><td>Serial</td></tr><tr><td>0</td><td>1</td><td>6800 Parallel</td></tr><tr><td>1</td><td>0</td><td>Not Allowed</td></tr><tr><td>1</td><td>1</td><td>8080 Parallel</td></tr></table> | IS1 | IS2 | Interface Mode | 0 | 0 | Serial | 0 | 1 | 6800 Parallel | 1 | 0 | Not Allowed | 1 | 1 | 8080 Parallel |
| IS1   | IS2                | Interface Mode |           |  |     |     |                |   |   |        |   |   |               |   |   |             |   |   |               |
| 0     | 0                  | Serial         |           |  |     |     |                |   |   |        |   |   |               |   |   |             |   |   |               |
| 0     | 1                  | 6800 Parallel  |           |  |     |     |                |   |   |        |   |   |               |   |   |             |   |   |               |
| 1     | 0                  | Not Allowed    |           |  |     |     |                |   |   |        |   |   |               |   |   |             |   |   |               |
| 1     | 1                  | 8080 Parallel  |           |  |     |     |                |   |   |        |   |   |               |   |   |             |   |   |               |
| 20    | IS1                | H/L            | I         |  |     |     |                |   |   |        |   |   |               |   |   |             |   |   |               |
|       |                    |                |           |  |     |     |                |   |   |        |   |   |               |   |   |             |   |   |               |
|       |                    |                |           |  |     |     |                |   |   |        |   |   |               |   |   |             |   |   |               |
|       |                    |                |           |  |     |     |                |   |   |        |   |   |               |   |   |             |   |   |               |
| 21    | V <sub>LOGIC</sub> |                |           | Power supply input. Must be connected to an external source.   |     |     |                |   |   |        |   |   |               |   |   |             |   |   |               |
| 22-28 | NC                 |                |           | No Connection.   |     |     |                |   |   |        |   |   |               |   |   |             |   |   |               |
| 29    | GND                |                |           | Ground.  |     |     |                |   |   |        |   |   |               |   |   |             |   |   |               |
| 30    | NC                 |                |           | No Connection.   |     |     |                |   |   |        |   |   |               |   |   |             |   |   |               |

## PHOTO REFERENCE FOR PIN FUNCTIONS

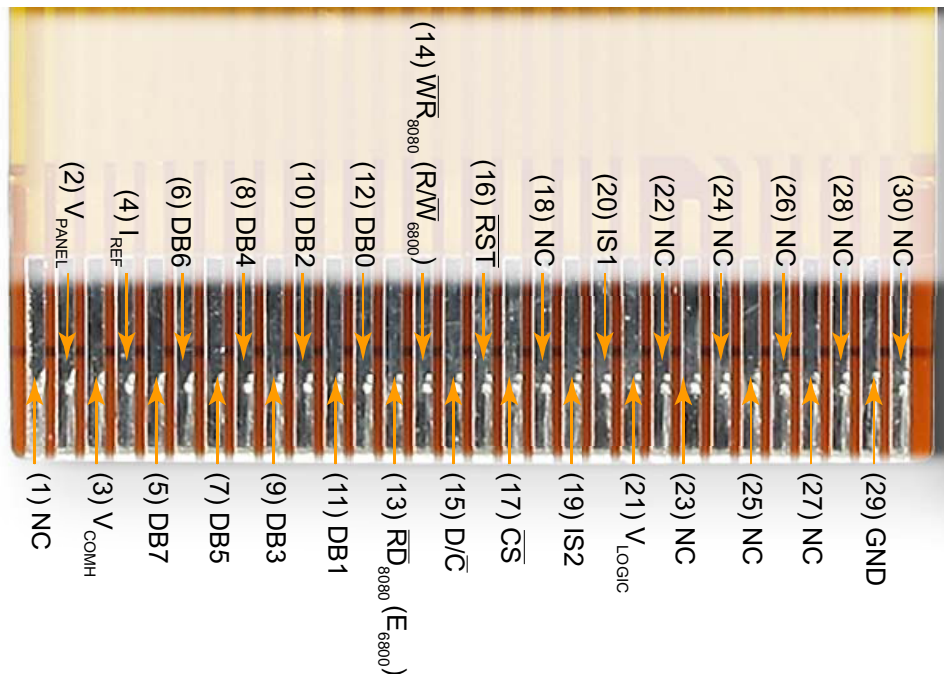


Figure 5. Photo Reference for Pin Functions





## ESD (ELECTRO-STATIC DISCHARGE)

The circuitry is industry standard CMOS logic and susceptible to ESD damage. Please use industry standard antistatic precautions as you would for any other static sensitive devices such as expansion cards, motherboards, or integrated circuits. Ground your body, work surfaces, and equipment.



## OPTICAL SPECIFICATIONS

---

### OPTICAL CHARACTERISTICS

| ITEM   | SYMBOL          | TEST CONDITION       | TYPICAL              |
|--|-----------------|----------------------|----------------------|
| Measurements taken at 1/64 duty, 104 Hz Frame Rate, and 0xB0 Contrast Setting.                                   |                 |                      |                      |
| Viewing Angle  |                 |                      | >160°                |
| Dark Room Contrast Ratio <sup>1</sup>  | CR              | 80 cd/m <sup>2</sup> | >100:1               |
| Response Time <sup>2</sup>   |                 |                      | <1 ms                |
| Luminous Intensity (IV)  | L <sub>BR</sub> | with polarizer       | 34 cd/m <sup>2</sup> |
| Duty   | 1/64            |                      |                      |
| Aperture   | 87.8%           |                      |                      |
| <sup>1</sup> Contrast Ratio = (brightness with pixels light)/(brightness with pixels dark).                      |                 |                      |                      |
| <sup>2</sup> Response Time: The amount of time it takes a pixel to change from active to inactive or back again. |                 |                      |                      |
| <sup>3</sup> Aperture rate is defined by dividing an effective display area with unit pixel area.                |                 |                      |                      |



## Definition of Viewing Angle

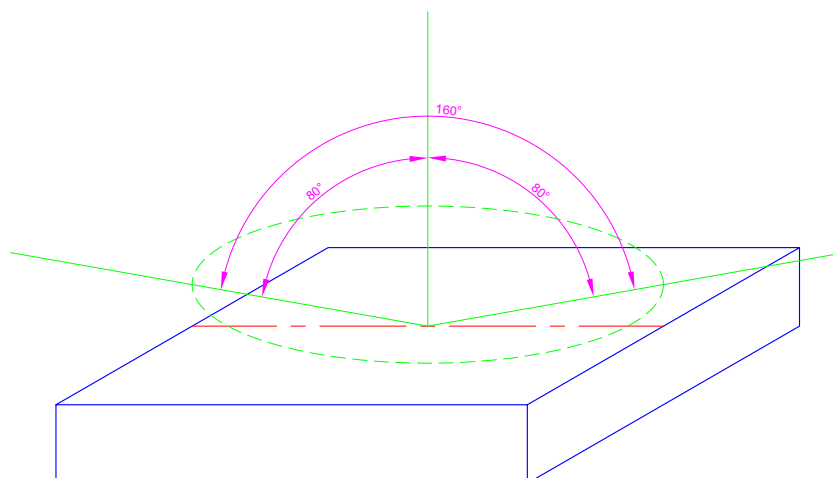


Figure 6. CFAL12864L-Y-B6TS has a 160° Viewing Angle

## OLED CONTROLLER INTERFACE

This module uses a Solomon Systech SSD1305 controller. For your reference, we added the controller Data Sheet as an appendix to this Data Sheet. See [APPENDIX D: SOLOMON SYSTECH SSD1305 CONTROLLER SPECIFICATION SHEET \(Pg. 35\)](#).

## MODULE RELIABILITY AND LONGEVITY

### MODULE RELIABILITY

| ITEM              | SPECIFICATION   |
|-------------------|---|
| CFAL12864L-Y-B6TS | 10,000 hours >50% of initial brightness at typical brightness for a new module. |

OLED displays are an emissive technology. Each pixel is susceptible to dimming based on its individual use (burn-in). Frequently used pixels will dim more quickly than pixels that are not used as often. Please avoid using a bright, static, high-contrast image for a long time. If you want to leave the display powered on, please use scrolling text or alternating images to "wear level" the pixels. To conserve power and display lifetime, turn off or dim the display when it is not in use.

### MODULE LONGEVITY (EOL/REPLACEMENT POLICY)

Crystalfontz is committed to making all of our modules available for as long as possible. For each module we introduce, we intend to offer it indefinitely. We do not preplan a module's obsolescence. The majority of modules we have introduced are still available.



We recognize that discontinuing a module may cause problems for some customers. However, rapidly changing technologies, component availability, or low customer order levels may force us to discontinue ("End of Life", EOL) a module. For example, we must occasionally discontinue a module when a supplier discontinues a component or a manufacturing process becomes obsolete. When we discontinue a module, we will do our best to find an acceptable replacement module with the same fit, form, and function.

In most situations, you will not notice a difference when comparing a "fit, form, and function" replacement module to the discontinued module. However, sometimes a change in component or process for the replacement module results in a slight variation, perhaps an improvement, over the previous design.

Although the replacement module is still within the stated Data Sheet specifications and tolerances of the discontinued module, changes may require modification to your circuit and/or firmware. Possible changes include:

- *Controller.* A new controller may require minor changes in your code.
- *Component tolerances.* Module components have manufacturing tolerances. In extreme cases, the tolerance stack can change the visual or operating characteristics.

Please understand that we avoid changing a module whenever possible; we only discontinue a module if we have no other option. We will post Part Change Notices on the product's webpage as soon as possible. If interested, you can subscribe to future part change notifications.

## CARE AND HANDLING PRECAUTIONS

---

For optimum operation of the module and to prolong its life, please follow the precautions below. Excessive voltage will shorten the life of the module. You must drive the display within the specified voltage limit. (See [Absolute Maximum Ratings \(Pg. 12\)](#)).

### ESD (ELECTRO-STATIC DISCHARGE)

The circuitry is industry standard CMOS logic and susceptible to ESD damage. Please use industry standard antistatic precautions as you would for any other static sensitive devices such as expansion cards, motherboards, or integrated circuits. Ground your body, work surfaces, and equipment.

### DESIGN AND MOUNTING

- To protect the touch screen from damage, CFAL12864L-Y-B6TS ships with a protective film over the touch screen. Please peel off the protective film slowly. Peeling off the protective film abruptly may generate static electricity.
- The touch screen is made out of plastic and can be scratched or damaged. Please handle carefully.
- To avoid damage, your bezel must be smooth where it touches the touch screen. Your bezel should not apply undue force to the touch screen.
- To avoid shorting, your mounting bezel should be at least 3 mm from the Active Area of the touch screen.



- Sharp bends can damage the touch screen FFC (Flat Flex Cable). Limit bend radius to at least R5.

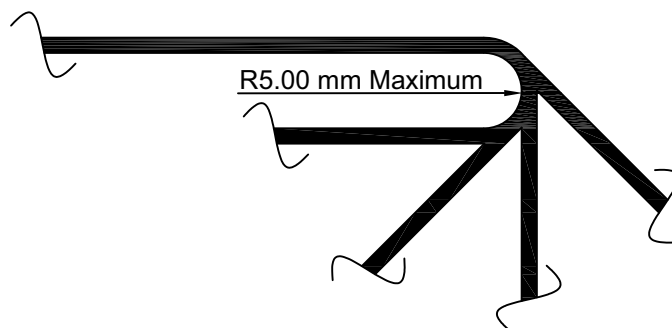


Figure 7. Limit Bend Radius of Touch Screen FFC

- Do not disassemble or modify the module.
- Do not reverse polarity to the power supply connections. Reversing polarity will immediately ruin the module.
- Use care to keep the exposed terminals clean. Contamination, including fingerprints, may make soldering difficult and the reliability of the soldered connection poor.
- The FFC (Flat Flex Cable) mates with a ZIF connector. Click [here](#) to see a typical connector sold by Digi-Key.
- Sharp bends can damage the OLED panel FFC. Do not crease FFC. Do not bend FFC tightly against the edge of the OLED panel.
- Do not repeatedly bend the OLED panel FFC beyond its elastic region.

## AVOID SHOCK, IMPACT, TORQUE, OR TENSION

- Do not expose the module to strong mechanical shock, impact, torque, or tension.
- Do not drop, toss, bend, or twist the module.
- Do not place weight or pressure on the module.

## CLEANING

- The touch screen is plastic. The plastic can be scratched or damaged. To clean the front of the touch screen, gently wipe it with a nonabrasive soft dry cloth. If the touch screen is still not clean, use a nonabrasive soft cloth moistened with isopropyl alcohol.
- Use the removable protective film to remove smudges (for example, fingerprints) and any foreign matter. If you no longer have the protective film, use standard transparent office tape (for example, Scotch® brand "Crystal Clear Tape"). If the touch screen is dusty, you may carefully blow it off with clean, dry, oil-free compressed air.

## OPERATION

- We do not recommend connecting this module to a PC's parallel port as an "end product." This module is not "user friendly" and connecting it to a PC's parallel port is often difficult, frustrating, and can result in a "dead" display due to mishandling. For more information, see our forum thread at <http://www.crystalfontz.com/forum/showthread.php?s=&threadid=3257>.
- Your circuit should be designed to protect the module from ESD and power supply transients.
- Observe the operating temperature limitations: from -20°C minimum to +70°C maximum with minimal fluctuations. Operation outside of these limits may shorten the life and/or harm the display.
- Operate away from dust, moisture, and direct sunlight.



## STORAGE AND RECYCLING



- Store in an ESD-approved container away from dust, moisture, and direct sunlight, fluorescent lamps, or any ultraviolet ray.
- Observe the storage temperature limitations: from -30°C minimum to +80°C maximum with minimal fluctuations. Rapid temperature changes can cause moisture to form, resulting in permanent damage.
- Do not allow weight to be placed on the modules while they are in storage.
- Please recycle your outdated Crystalfontz modules at an approved facility.



## APPENDIX A: QUALITY ASSURANCE STANDARDS

---


### INSPECTION CONDITIONS

- Environment
  - Temperature:  $25 \pm 5^{\circ}\text{C}$
  - Humidity: 30~85% RH (noncondensing)
- For visual inspection of active display area
  - Source lighting: two 20-Watt or one 40-Watt fluorescent light
  - Display adjusted for best contrast
  - Viewing distance:  $30 \pm 5$  cm (about 12 inches)
  - Viewing angle: inspect at  $45^{\circ}$  angle of vertical line right and left, top and bottom

### COLOR DEFINITIONS

We try to describe the appearance of our modules as accurately as possible. For the photos, we adjust for optimal appearance. Actual display appearance may vary due to (1) different operating conditions, (2) small variations of component tolerances, (3) inaccuracies of our camera, (4) color interpretation of the photos on your monitor, and/or (5) personal differences in the perception of color.

### DEFINITION OF ACTIVE AREA AND VIEWING AREA

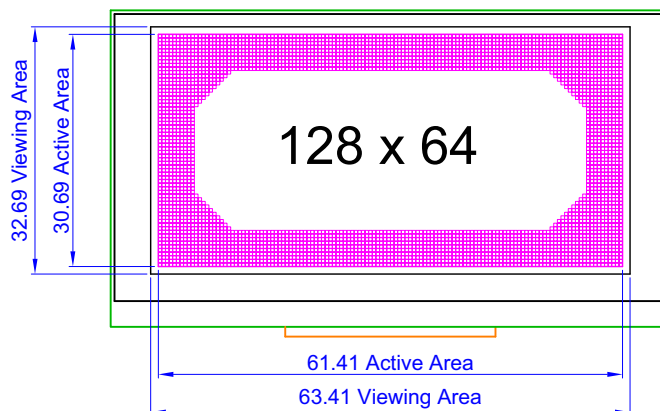



## ACCEPTANCE SAMPLING



| DEFECT TYPE   | AQL*        |
|---|-------------|
| Major   | $\leq 65\%$ |
| Minor   | $< 1.0\%$   |
| * Acceptable Quality Level: maximum allowable error rate or variation from standard |             |

## DEFECTS CLASSIFICATION

Defects are defined as:

- Major Defect: results in failure or substantially reduces usability of unit for its intended purpose.
- Minor Defect: deviates from standards but is not likely to reduce usability for its intended purpose.


## ACCEPTANCE STANDARDS
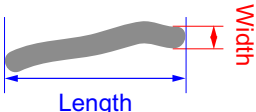
| # | DEFECT TYPE  | CRITERIA  |                                       |                | MAJOR / MINOR |
|---|--|---|---------------------------------------|----------------|---------------|
| 1 | Electrical defects   | 1. No display, display malfunctions, or shorted segments.<br>2. Current consumption exceeds specifications. |                                       |                | Major         |
| 2 | Viewing area defect  | Viewing area does not meet specifications.  |                                       |                | Major         |
| 3 | Blemishes or foreign matter on display segments  | <div>Blemish<br/></div>  | Defect Size                           | Acceptable Qty | Minor         |
|   |  |   | ≤0.30 mm                              | 3              |               |
|   |  |   | ≤2 defects within 10 mm of each other |                |               |
| 4 | Dark lines or scratches in display area<br><br> | Defect Width  | Defect Length                         | Acceptable Qty | Minor         |
|   |  | ≤0.03 mm  | ≤3.0 mm                               | 3              |               |
|   |  | 0.03 to 0.05  | ≤2.0 mm                               | 2              |               |
|   |  | 0.05 to 0.08  | ≤2.0 mm                               | 1              |               |
|   |  | 0.08 to 0.10  | ≤3.0 mm                               | 0              |               |
|   |  | ≥0.10   | >3.0 mm                               | 0              |               |





## ACCEPTANCE STANDARDS
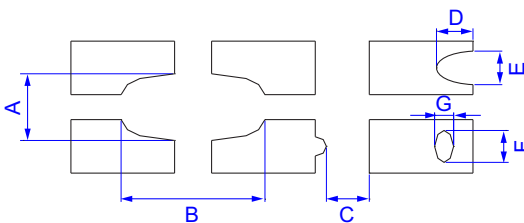
| # | DEFECT TYPE                              | CRITERIA  |   | MAJOR / MINOR |
|---|--|---|---|---------------|
| 5 | Bubbles between polarizer film and glass | Defect Size   | Acceptable Qty  | Minor         |
|   |  | ≤0.20 mm  | Ignore  |               |
|   |  | 0.20 to 0.40 mm   | 3   |               |
|   |  | 0.40 to 0.60 mm   | 2   |               |
|   |  | ≥0.60 mm  | 0   |               |
| 6 | Display pattern defect                   |   |   | Minor         |
|   |  | Pixel Size  | Acceptable Qty  |               |
|   |  | $((A+B)/2) \leq 0.20 \text{ mm}$  | $\leq 3 \text{ total defects}$<br>$\leq 2 \text{ pinholes per digit}$ |               |
|   |  | $C > 0 \text{ mm}$  |   |               |
|   |  | $((D+E)/2) \leq 0.25 \text{ mm}$  |   |               |
|   |  | $((F+G)/2) \leq 0.25 \text{ mm}$  |   |               |
| 7 | PCB defects                              | 1. Oxidation or contamination on connectors.*<br>2. Wrong parts, missing parts, or parts not in specification.*<br>3. Jumpers set incorrectly.<br>4. Solder (if any) on bezel, LED pad, zebra pad, or screw hole pad is not smooth.<br>*Minor if display functions correctly. Major if the display fails. |   | Minor         |
| 8 | Soldering defects                        | 1. Unmelted solder paste.<br>2. Cold solder joints, missing solder connections, or oxidation.*<br>3. Solder bridges causing short circuits.*<br>4. Residue or solder balls.<br>5. Solder flux is black or brown.<br>*Minor if display functions correctly. Major if the display fails.                    |   | Minor         |



## APPENDIX B: SAMPLE CODE

---

### SOURCES FOR DRIVER LIBRARIES

Graphic driver libraries may save a lot of time and help you develop a more professional product. Possible library sources are [easyGUI](#), [en.radzio.dxp.pl](#), [Gwentech](#), [Micrium](#), [RAMTEX](#), and [Segger emWin](#).

### SAMPLE CODE

The code shows the boot screen logo, first normally, then inverted. You can download the complete source from this link: [http://www.crystalfontz.com/products/document/2021/Demonstration\\_Code.zip](http://www.crystalfontz.com/products/document/2021/Demonstration_Code.zip).

Note: Please observe V<sub>PANEL</sub> sequencing as described in [Details of Interface Pin Function \(Pg. 14\)](#). See also [Power Up and Power Down Sequencing \(Pg. 11\)](#).

```
#include <avr/io.h>
#include <util/delay.h>

// all on PORTC
#define LCD_CD PC7
#define LCD_RW PC6// 6800 mode name
#define LCD_E PC5 // 6800 mode name
#define LCD_WR PC6// 8080 mode name
#define LCD_RD PC5// 8080 mode name
#define LCD_CS PC4
#define LCD_RES PC2

#define CLR_CD PORTC &= ~(1<<LCD_CD);
#define SET_CD PORTC |= (1<<LCD_CD);

#define CLR_CS PORTC &= ~(1<<LCD_CS);
#define SET_CS PORTC |= (1<<LCD_CS);

#define CLR_RESET PORTC &= ~(1<<LCD_RES);
#define SET_RESET PORTC |= (1<<LCD_RES);

// 6800 mode pin functions
#define CLR_RW PORTC &= ~(1 << LCD_RW); // 6800 mode
#define SET_RW PORTC |= (1 << LCD_RW); // 6800 mode
#define CLR_E PORTC &= ~(1 << LCD_E); // 6800 mode
#define SET_E PORTC |= (1 << LCD_E); // 6800 mode

// 8080 mode pin functions
#define CLR_WR PORTC &= ~(1 << LCD_WR); // 8080 mode
#define SET_WR PORTC |= (1 << LCD_WR); // 8080 mode
#define CLR_RD PORTC &= ~(1 << LCD_RD); // 8080 mode
#define SET_RD PORTC |= (1 << LCD_RD); // 8080 mode

#define MODE68000

// for bmp function
typedef uint8_t bitmap_t[8][128];

void delay(uint32_t twait)
{
    while (twait--)
        asm volatile ("nop");
}
```



```
// *****  
uint8_t boot_logo[8][128] =  
{  
    See full code listing  
};  
// *****  
void oled_cmd(uint8_t cmd)  
{  
    PORTA = cmd; // set up data on bus  
    CLR_CS;      // chip selected  
    CLR_CD;      // command mode  
  
#ifdef MODE6800  
    CLR_RW;  
  
    // clock E  
    SET_E;  
    CLR_E;  
  
#else  
    SET_RD;  
  
    // clock WR  
    CLR_WR;  
    SET_WR;  
  
#endif  
    SET_CS;      // unselect chip  
}  
// *****  
void oled_data(uint8_t dat)  
{  
    PORTA = dat; // set up data on bus  
    SET_CD;      // data mode  
    CLR_CS;      // chip selected  
  
#ifdef MODE6800  
    CLR_RW;  
  
    // clock E  
    SET_E;  
    CLR_E;  
  
#else  
    // 8080 mode  
    SET_RD;  
  
    // clock WR  
    CLR_WR;  
    SET_WR;  
  
#endif  
    SET_CS;      // unselect chip  
}  
// *****  
void lcd_clr(uint8_t color)  
{  
    int i,p;
```



```
oled_cmd(0x40);

for (p=0;p<8;p++) // pages
{
    oled_cmd(0xB0 + p); // set page address
    oled_cmd(0x10);     // set high column address
    oled_cmd(0x00);     // set low column address
    for (i=0;i<132;i++)
    {
        oled_data(color);
    }
}

// ***** //
void bmp(bitmap_t b)
{
    unsigned int j=0;
    unsigned int page=0;

    oled_cmd(0x00); // set high column address
    oled_cmd(0x10); // set low column address

    oled_cmd(0xB0); // set page address

    for(page=0;page<8;page++)
    {
        for(j=0;j<128;j++)
        {
            oled_data(b[page][j]);
        }
        // 132x64 logically, lazy, pad the data sent
        oled_data(0);
        oled_data(0);
        oled_data(0);
        oled_data(0);
    }
}

// ***** //
void init_OLED()
{
    PORTD = 0; // all off
    DDRD |= (1<<3); // VPP output

    DDRA = 0xFF; // set PORTA for output

#ifdef MODE6800
    PORTC = 0b11011110;
#else
    PORTC = 0b11111110;
#endif
    DDRC = 0xFE;

    DDRD |= 0x06; // oled pins output

    delay(20000L);

    // reset the display
    CLR_RESET;
    delay(10000);
    SET_RESET;

    delay(20000);

    // enable VPP
    PORTD |= (1<<3);
```



```
    delay(200000L);

    oled_cmd(0xA8);    // Set multiplex ratio
    oled_cmd(0x3F);    // set for 64

    oled_cmd(0x20);    // Set Memory Addressing Mode
    oled_cmd(0x00);    // Horizontal

    oled_cmd(0x81);    // Contrast control mode set
    oled_cmd(0x88);    // (0x00 - 0xFF valid)

    oled_cmd(0xAF);    // Display on

    delay(5000L);

    lcd_clr(0x00);    // clear display
}
// *****
int main( void )
{
    init_OLED();

    delay(200000L);

    while (1)
    {
        oled_cmd(0xA6);    // Display normal
        bmp(boot_logo);
        delay(5000000L);
        oled_cmd(0xA7);    // Display inverted
        bmp(boot_logo);
        delay(5000000L);
    }

    return 0;
}
```



## APPENDIX C: OLED MODULE TERMS AND SYMBOLS

| CrystalFontz Symbol      | Equivalents            | Description  |
|--------------------------|------------------------|--|
| C                        |                        | Capacitor  |
| cd/m <sup>2</sup>        | nit                    | Candela meter squared is the standard unit of measurement for luminous intensity (photometric brightness).   |
| CIE                      |                        | A color model based on human perception developed by the CIE (Commission Internationale de l'Eclairage) committee.   |
| CLS                      |                        | Clock select pin.  |
| COF                      | COT<br>TAB             | Chip On Flex. Controller is on the FPC. Similar in appearance to "TAB." The flex circuit on COF is typically much thinner than the flex of a "flex tail."  |
| COG                      |                        | Chip On Glass. Controller is on the glass panel.   |
| COM                      |                        | Common driver. Common signal output for OLED display.  |
| CR                       |                        | Contrast Ratio = (brightness with pixels light)/(brightness with pixels dark).   |
| $\overline{\text{CS}}$   | CS#<br>CSB             | Chip select input.<br><br><i>Low:</i> Controller chip is selected. Communications with host is possible.<br><br><i>High:</i> Controller chip is not selected. Host interface signals are ignored by the controller.  |
| D                        |                        | Diode  |
| DB0 ~ DBn                | D0 ~ Dn                | Bidirectional databus connects to 8-bit or 16-bit standard host databus. When SPI (serial interface) is selected, DB0 serves as the serial clock input signal (SCL or SCLK) and DB1 serves as the serial data input signal (SI or SDIN). DB2 to DBn are set to high impedance. |
| D/ $\overline{\text{C}}$ | RS<br>A0<br>CD or D/C# | Data/Command control. Determines whether data bits are data or command.<br><br><i>1 – High:</i> Addresses the data register.<br><br><i>0 – Low:</i> Addresses the command register.  |
| ESD                      |                        | Electro-Static Discharge. Sudden and brief electrical current that flows between two objects. ESD between a human and a TFT module can cause permanent damage.   |
| FB                       |                        | Feedback input for the booster circuit. Use to adjust booster output voltage level, V <sub>PANEL</sub> .   |
| FFC                      |                        | Flat Flex Cable. Used for Touch Screen connection. Also called "pigtail."  |




| Crystalfontz Symbol       | Equivalents                    | Description  |                             |     |                |   |   |                            |   |   |                             |   |   |             |   |   |               |
|---------------------------|--------------------------------|--|-----------------------------|-----|----------------|---|---|----------------------------|---|---|-----------------------------|---|---|-------------|---|---|---------------|
| FG                        |                                | Frame Ground.  |                             |     |                |   |   |                            |   |   |                             |   |   |             |   |   |               |
| FPC                       |                                | Flexible Printed Circuit. Also called “flex tail.” Typically much thicker than the “flex” film of COF (Chip On Flex).  |                             |     |                |   |   |                            |   |   |                             |   |   |             |   |   |               |
| GDR                       |                                | Gate Drive. Output signal drives the gate of the external NMOS of the booster circuit.   |                             |     |                |   |   |                            |   |   |                             |   |   |             |   |   |               |
| GND                       | V <sub>SS</sub>                | Ground. Must be connected to an external ground.   |                             |     |                |   |   |                            |   |   |                             |   |   |             |   |   |               |
| I <sub>LOGIC</sub>        | I <sub>DD</sub>                | Operating current for V <sub>LOGIC</sub> .   |                             |     |                |   |   |                            |   |   |                             |   |   |             |   |   |               |
| I <sub>LOGIC, SLEEP</sub> | I <sub>DD, SLEEP</sub>         | Sleep mode current for V <sub>LOGIC</sub> .  |                             |     |                |   |   |                            |   |   |                             |   |   |             |   |   |               |
| I <sub>PANEL</sub>        | I <sub>CC</sub>                | Supply current for V <sub>PANEL</sub> .  |                             |     |                |   |   |                            |   |   |                             |   |   |             |   |   |               |
| I <sub>PANEL, SLEEP</sub> | I <sub>CC, SLEEP</sub>         | Sleep mode current for V <sub>PANEL</sub> .  |                             |     |                |   |   |                            |   |   |                             |   |   |             |   |   |               |
| I <sub>REF</sub>          |                                | Segment output current reference for brightness adjustment. A resistor should be connected between this pin and GND. Used to set the current.  |                             |     |                |   |   |                            |   |   |                             |   |   |             |   |   |               |
| I/O                       |                                | Input/Output.  |                             |     |                |   |   |                            |   |   |                             |   |   |             |   |   |               |
| IS1                       | BS1<br>C86<br>M80              | <table><tr><th>IS1</th><th>IS2</th><th>Interface Mode</th></tr><tr><td>0</td><td>0</td><td>SPI (Serial), if available</td></tr><tr><td>0</td><td>1</td><td>6800 Parallel, if available</td></tr><tr><td>1</td><td>0</td><td>Not Allowed</td></tr><tr><td>1</td><td>1</td><td>8080 Parallel</td></tr></table> | IS1                         | IS2 | Interface Mode | 0 | 0 | SPI (Serial), if available | 0 | 1 | 6800 Parallel, if available | 1 | 0 | Not Allowed | 1 | 1 | 8080 Parallel |
| IS1                       | IS2                            |  | Interface Mode              |     |                |   |   |                            |   |   |                             |   |   |             |   |   |               |
| 0                         | 0                              |  | SPI (Serial), if available  |     |                |   |   |                            |   |   |                             |   |   |             |   |   |               |
| 0                         | 1                              |  | 6800 Parallel, if available |     |                |   |   |                            |   |   |                             |   |   |             |   |   |               |
| 1                         | 0                              |  | Not Allowed                 |     |                |   |   |                            |   |   |                             |   |   |             |   |   |               |
| 1                         | 1                              | 8080 Parallel  |                             |     |                |   |   |                            |   |   |                             |   |   |             |   |   |               |
| IS2                       | BS2<br>P/S<br>MS<br>MS<br>M/S# |  |                             |     |                |   |   |                            |   |   |                             |   |   |             |   |   |               |
| L <sub>BRNORMAL</sub>     | IV                             | Luminous Intensity Brightness, NORMAL operation.   |                             |     |                |   |   |                            |   |   |                             |   |   |             |   |   |               |
| L <sub>BRSTANDBY</sub>    | IV                             | Luminous Intensity Brightness, STANDBY.  |                             |     |                |   |   |                            |   |   |                             |   |   |             |   |   |               |
| mm                        |                                | Millimeter or millimetre. Unit of length equal to one thousandth of a meter.<br>1 millimeter = 0.0394 inches.  |                             |     |                |   |   |                            |   |   |                             |   |   |             |   |   |               |
| mW                        |                                | Milliwatt is equal to one thousandth of a Watt.<br>Watts = Volts x Amps.   |                             |     |                |   |   |                            |   |   |                             |   |   |             |   |   |               |
| NC                        | nc                             | No Connection.   |                             |     |                |   |   |                            |   |   |                             |   |   |             |   |   |               |
| OLED                      |                                | Organic light-emitting diode.  |                             |     |                |   |   |                            |   |   |                             |   |   |             |   |   |               |
| P <sub>OPERATION</sub>    | P <sub>T</sub>                 | Normal mode Power consumption.   |                             |     |                |   |   |                            |   |   |                             |   |   |             |   |   |               |
| P <sub>STANDBY</sub>      |                                | Standby mode Power consumption.  |                             |     |                |   |   |                            |   |   |                             |   |   |             |   |   |               |
| Q                         |                                | Transistor, including FET and MOSFET.  |                             |     |                |   |   |                            |   |   |                             |   |   |             |   |   |               |



| CrystalFontz Symbol                   | Equivalents  | Description  |
|---------------------------------------|--|--|
| R                                     |  | Resistor   |
| $\overline{RD}_{8080}$ ( $E_{6800}$ ) | $\overline{RD}$ (E)<br>E ( $\overline{RD}$ )<br>E<br>RDB | Host interface input.<br><br><i>8080 Host:</i> Active low. Signal on the databus is latched at the rising edge of $\overline{RD}$ .<br><br><i>6800 Host (if available):</i> Enable control signal input active high.<br><br>E = <i>High</i> : Read or Write operation is active.<br><br>E = <i>Low</i> : No operation. |
| RH                                    | Rh   | Relative Humidity.   |
| RoHS                                  |  | Restriction of Hazardous Substances Directive, an environmental standard.  |
| $\overline{RST}$                      | $\overline{RES}$<br>RST#<br>RES#<br>RSTB                 | Reset signal.<br><br><i>Low:</i> Display controller is reset. The $\overline{RST}$ pin should be pulsed low shortly after power is applied.<br><br><i>High:</i> The $\overline{RST}$ pin should be brought high for normal operation.  |
| SCL                                   | SCK  | Serial Clock signal.   |
| SEG                                   |  | Segment driver. Segment signal output for OLED display.  |
| SENSE                                 |  | Source current for external NMOS of booster circuit.   |
| SI                                    | SDA<br>MOSI  | Serial data Input signal.  |
| SW                                    |  | Switch output drives the gate of the external NMOS of the booster circuit.   |
| Ta                                    | TA   | "Ambient temperature" is the temperature of the air that surrounds a component.  |
| T <sub>OP</sub>                       |  | Operating temperature.   |
| T <sub>ST</sub>                       | T <sub>STG</sub>   | Storage Temperature.   |
| V <sub>BREF</sub>                     |  | Internal voltage reference for booster circuit. A decoupling capacitor, typically 1 $\mu$ F, should be connected to GND.   |
| V <sub>COMH</sub>                     |  | High level voltage output for common signals. A low ESR capacitor should be connected between this pin and GND. Do not connect external power supply directly to this pin.   |
| V <sub>IH</sub>                       | V <sub>ICH</sub>   | High level input voltage.  |



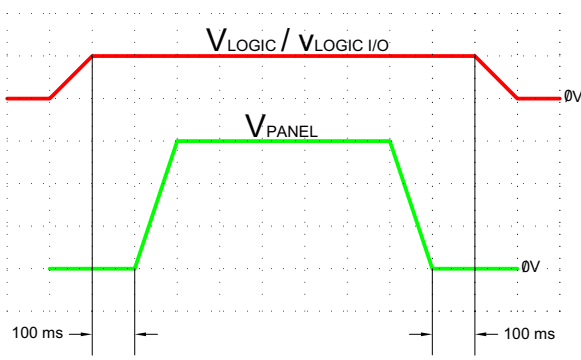

| CrystalFontz Symbol | Equivalents  | Description   |
|---------------------|--|---|
| $V_{IL}$            | $V_{LCH}$  | Low level input voltage.  |
| $V_{LOGIC}$         | $V_{DD}$<br>$V_{DD1}$<br>$V_{CC}$<br>(if it has PCB) | Power supply input. Must be connected to an external source.  |
| $V_{LOGIC\ I/O}$    | $V_{DD\ I/O}$<br>$V_{I/O}$<br>$V_{CCIO}$             | Supply voltage for I/O signals.   |
| $V_{OH}$            | $V_{OHC}$  | High level output voltage.  |
| $V_{OL}$            | $V_{OLC}$  | Low level output voltage.   |
| $V_{PANEL}$         | $V_{PP}$<br>$V_{CC}$<br>(if no PCB)                  | <p>Driver supply voltage. Only high voltage input on chip. Power must be supplied externally.</p> <p><i>Note: You must observe power sequencing for this signal.</i></p> <p><i>Power Up</i> – Display must be powered up and initialized before power is applied to the signal.</p> <p><i>Power Down</i> – Power must be removed from this signal before the display is powered off.</p>  |



| CrystalFontz Symbol                              | Equivalents  | Description  |
|--|--|--|
| $V_{REF}$  |  | Voltage reference pin for pre-charge voltage in driving OLED device. Voltage should be set to match with the OLED driving voltage in current drive phase. It can either be supplied externally or by connecting to $V_{PANEL}$ .   |
| $V_{SL}$   |  | Segment voltage reference pin. This pin should be left open.   |
| $\overline{WR}_{8080} (\#R/\overline{W}_{6800})$ | $\begin{array}{c} \overline{R/\overline{W}} (\overline{WR}) \\ \overline{WR} (R/\overline{W}) \\ R/W\# \\ WRB \end{array}$ | <p>Host interface input.</p> <p><i>8080 Host:</i> Active low. Signal on the databus is latched at the rising edge of <math>\overline{WR}</math> signal.</p> <p><i>#6800 Host (if available):</i> Read/Write control signal output.</p> <p><math>R/\overline{W}</math> = High: Read (Host←Module)</p> <p><math>R/\overline{W}</math> = Low: Write (Host→Module)</p> |



## APPENDIX D: SOLOMON SYSTECH SSD1305 CONTROLLER SPECIFICATION SHEET

---

The complete *Advance Information 132 x 64 Dot Matrix OLED/PLED Segment/Common Driver with Controller Data Sheet* revision 1.9 (70 pages) follows.

# SSD1305

## *Advance Information*

### **132 x 64 Dot Matrix OLED/PLED Segment/Common Driver with Controller**

This document contains information on a new product. Specifications and information herein are subject to change without notice.

<http://www.solomon-systech.com>

**SSD1305**

Rev 2.0

P 1/71

Oct 2008

Copyright © 2008 **Solomon Systech Limited**



## Appendix: IC Revision history of SSD1305 Specification

| Version | Change Items   | Effective Date |
|---------|--|----------------|
| 1.0     | Change to Advance Info.  | 27-Mar-06      |
| 1.1     | Revise command 91h<br>Add a note on the capacitor value in Section 13 Application Example<br>Add I2C Interface   | 28-Apr-06      |
| 1.2     | Revise CL pin description in Table 7-1<br>Revise Figure 10-6   | 26-Jun-06      |
| 1.3     | Revise section 8.1.2 & Section 13<br>Add Figure 10-7   | 17-Aug-06      |
| 1.4     | Remove software reset command (E2h)<br>Revise command 26h/27h/29h/2Ah (Set time interval between each scroll step)   | 06-Sep-06      |
| 1.5     | Revise Figure 14-1 Application Example<br>Revise Die thickness to 457um from 475um   | 22-Sep-06      |
| 1.6     | Revise “Bump Size” of pin “127-147, 294-314”<br>Revise Figure 10-6 ,Figure 8-5 , Figure 13-4   | 21-Dec-06      |
| 1.7     | Add light sensitive note In Section 11 – Maximum ratings<br>Revise Note 2 in Section 8.10 Power ON/OFF sequence by adding the word “disable”<br>Add China RoHS disclaimer at the last page.                | 16-May-07      |
| 1.8     | For SPI/6800/8080 MCU interface, change the Rise / Fall time (tR/tF) to max. 40ns<br>Revise typo in SSD1305T6R1 dwg on P.68<br>pitch: From 0.85 change to 0.845  | 02-Aug-07      |
| 1.9     | Add SSD1305Z3 in ordering information & add die tray<br>Revise CL pin to “connected to VSS” in Section 8.3<br>Revise typo in page 42 : from “upper column address is 00h” to “upper column address is 10h” | 23-May-08      |
| 2.0     | Add IC revision history on spec  | 27-Oct-08      |

## CONTENTS

|           |  |           |
|-----------|--|-----------|
| <b>1</b>  | <b>GENERAL DESCRIPTION .....</b>   | <b>8</b>  |
| <b>2</b>  | <b>FEATURES .....</b>  | <b>8</b>  |
| <b>3</b>  | <b>ORDERING INFORMATION .....</b>  | <b>8</b>  |
| <b>4</b>  | <b>BLOCK DIAGRAM .....</b>   | <b>9</b>  |
| <b>5</b>  | <b>DIE PAD FLOOR PLAN .....</b>  | <b>10</b> |
| <b>6</b>  | <b>PIN ARRANGEMENT .....</b>   | <b>13</b> |
| 6.1       | SSD1305T6R1 PIN ASSIGNMENT .....   | 13        |
| 6.2       | SSD1305T7R1 PIN ASSIGNMENT .....   | 15        |
| <b>7</b>  | <b>PIN DESCRIPTION .....</b>   | <b>17</b> |
| <b>8</b>  | <b>FUNCTIONAL BLOCK DESCRIPTIONS .....</b>                               | <b>19</b> |
| 8.1       | MCU INTERFACE SELECTION .....  | 19        |
| 8.1.1     | MCU Parallel 6800-series Interface .....                                 | 19        |
| 8.1.2     | MCU Parallel 8080-series Interface .....                                 | 20        |
| 8.1.3     | MCU Serial Interface .....   | 22        |
| 8.1.4     | MCU I <sup>2</sup> C Interface .....                                     | 22        |
| 8.2       | COMMAND DECODER .....  | 25        |
| 8.3       | OSCILLATOR CIRCUIT AND DISPLAY TIME GENERATOR .....                      | 26        |
| 8.4       | FR SYNCHRONIZATION .....   | 27        |
| 8.5       | RESET CIRCUIT .....  | 27        |
| 8.6       | SEGMENT DRIVERS / COMMON DRIVERS .....                                   | 28        |
| 8.7       | GRAPHIC DISPLAY DATA RAM (GDDRAM) .....                                  | 30        |
| 8.8       | AREA COLOR DECODER .....   | 31        |
| 8.9       | SEG/COM DRIVING BLOCK .....  | 32        |
| 8.10      | POWER ON AND OFF SEQUENCE .....  | 33        |
| <b>9</b>  | <b>COMMAND TABLE .....</b>   | <b>34</b> |
| 9.1       | DATA READ / WRITE .....  | 40        |
| <b>10</b> | <b>COMMAND DESCRIPTIONS .....</b>  | <b>41</b> |
| 10.1      | FUNDAMENTAL COMMAND .....  | 41        |
| 10.1.1    | Set Lower Column Start Address for Page Addressing Mode (00h~0Fh) .....  | 41        |
| 10.1.2    | Set Higher Column Start Address for Page Addressing Mode (10h~1Fh) ..... | 41        |
| 10.1.3    | Set Memory Addressing Mode (20h) .....                                   | 41        |
| 10.1.4    | Set Column Address (21h) .....   | 42        |
| 10.1.5    | Set Page Address (22h) .....   | 43        |
| 10.1.6    | Set Display Start Line (40h~7Fh) .....                                   | 44        |
| 10.1.7    | Set Contrast Control for BANK0 (81h) .....                               | 44        |
| 10.1.8    | Set Brightness for Area Color Banks (82h) .....                          | 44        |
| 10.1.9    | Set Look Up Table (LUT) (91h) .....                                      | 44        |
| 10.1.10   | Set Bank Color of BANK1 to BANK16 (PAGE0) (92h) .....                    | 45        |
| 10.1.11   | Set Bank Color of BANK17 to BANK32 (PAGE0) (93h) .....                   | 45        |
| 10.1.12   | Set Segment Re-map (A0h/A1h) .....                                       | 45        |
| 10.1.13   | Entire Display ON (A4h/A5h) .....  | 45        |
| 10.1.14   | Set Normal/Inverse Display (A6h/A7h) .....                               | 45        |
| 10.1.15   | Set Multiplex Ratio (A8h) .....  | 45        |
| 10.1.16   | Reserved (AAh) .....   | 45        |
| 10.1.17   | Dim Mode setting (ABh) .....   | 45        |
| 10.1.18   | Master Configuration (ADh) .....   | 45        |

|           |   |           |
|-----------|---|-----------|
| 10.1.19   | Set Display ON/OFF (ACh/AEh/AFh).....                           | 46        |
| 10.1.20   | Set Page Start Address for Page Addressing Mode (B0h~B7h).....  | 46        |
| 10.1.21   | Set COM Output Scan Direction (C0h/C8h).....                    | 46        |
| 10.1.22   | Set Display Offset (D3h).....                                   | 46        |
| 10.1.23   | Set Display Clock Divide Ratio/ Oscillator Frequency (D5h)..... | 49        |
| 10.1.24   | Set Area Color Mode ON/OFF & Low Power Display Mode (D8h).....  | 49        |
| 10.1.25   | Set Pre-charge Period (D9h).....                                | 49        |
| 10.1.26   | Set COM Pins Hardware Configuration (DAh).....                  | 50        |
| 10.1.27   | Set V <sub>COMH</sub> Deselect Level (DBh).....                 | 52        |
| 10.1.28   | Enter Read Modify Write (E0h).....                              | 52        |
| 10.1.29   | NOP (E3h).....  | 53        |
| 10.1.30   | Exit Read Modify Write (EEh).....                               | 53        |
| 10.1.31   | Status register Read.....                                       | 53        |
| 10.2      | GRAPHIC ACCELERATION COMMAND.....                               | 54        |
| 10.2.1    | Horizontal Scroll Setup (26h/27h).....                          | 54        |
| 10.2.2    | Continuous Vertical and Horizontal Scroll Setup (29h/2Ah).....  | 55        |
| 10.2.3    | Deactivate Scroll (2Eh).....                                    | 56        |
| 10.2.4    | Activate Scroll (2Fh).....                                      | 56        |
| 10.2.5    | Set Vertical Scroll Area(A3h).....                              | 57        |
| <b>11</b> | <b>MAXIMUM RATINGS.....</b>                                     | <b>58</b> |
| <b>12</b> | <b>DC CHARACTERISTICS.....</b>                                  | <b>59</b> |
| <b>13</b> | <b>AC CHARACTERISTICS.....</b>                                  | <b>60</b> |
| <b>14</b> | <b>APPLICATION EXAMPLE.....</b>                                 | <b>65</b> |
| <b>15</b> | <b>PACKAGE INFORMATION.....</b>                                 | <b>66</b> |
| 15.1      | SSD1305Z DIE TRAY INFORMATION.....                              | 66        |
| 15.2      | SSD1305T6R1 DETAIL DIMENSION.....                               | 67        |
| 15.3      | SSD1305T7R1 DETAIL DIMENSION.....                               | 69        |
| 15.4      | SSD1305Z3 DIE TRAY INFORMATION.....                             | 70        |

## TABLES

|   |    |
|---|----|
| TABLE 3-1 : ORDERING INFORMATION .....  | 8  |
| TABLE 5-1 : SSD1305Z BUMP DIE PAD COORDINATES .....                                   | 12 |
| TABLE 6-1 : SSD1305T6R1 PIN ASSIGNMENT TABLE .....                                    | 14 |
| TABLE 6-2 : SSD1305T7R1 PIN ASSIGNMENT .....  | 16 |
| TABLE 7-1 : PIN DESCRIPTION .....   | 17 |
| TABLE 7-2 : MCU BUS INTERFACE PIN SELECTION .....                                     | 18 |
| TABLE 8-1 : MCU INTERFACE ASSIGNMENT UNDER DIFFERENT BUS INTERFACE MODE.....          | 19 |
| TABLE 8-2 : CONTROL PINS OF 6800 INTERFACE .....                                      | 19 |
| TABLE 8-3 : CONTROL PINS OF 8080 INTERFACE (FORM 1) .....                             | 21 |
| TABLE 8-4 : CONTROL PINS OF 8080 INTERFACE (FORM 2) .....                             | 21 |
| TABLE 8-5 : CONTROL PINS OF SERIAL INTERFACE .....                                    | 22 |
| TABLE 9-1: COMMAND TABLE .....  | 34 |
| TABLE 9-2 : READ COMMAND TABLE .....  | 40 |
| TABLE 9-3 : ADDRESS INCREMENT TABLE (AUTOMATIC).....                                  | 40 |
| TABLE 10-1 : EXAMPLE OF SET DISPLAY OFFSET AND DISPLAY START LINE WITH NO REMAP ..... | 47 |
| TABLE 10-2 :EXAMPLE OF SET DISPLAY OFFSET AND DISPLAY START LINE WITH REMAP .....     | 48 |
| TABLE 10-3 : COM PINS HARDWARE CONFIGURATION.....                                     | 50 |
| TABLE 10-4 : EXAMPLE OF READ MODIFY WRITE MODE .....                                  | 53 |
| TABLE 11-1 : MAXIMUM RATINGS (VOLTAGE REFERENCED TO $V_{SS}$ ) .....                  | 58 |
| TABLE 12-1 : DC CHARACTERISTICS .....   | 59 |
| TABLE 13-1 : AC CHARACTERISTICS .....   | 60 |
| TABLE 13-2 : 6800-SERIES MCU PARALLEL INTERFACE TIMING CHARACTERISTICS .....          | 61 |
| TABLE 13-3 : 8080-SERIES MCU PARALLEL INTERFACE TIMING CHARACTERISTICS .....          | 62 |
| TABLE 13-4 : SERIAL INTERFACE TIMING CHARACTERISTICS .....                            | 63 |
| TABLE 13-5 :I <sup>2</sup> C INTERFACE TIMING CHARACTERISTICS .....                   | 64 |



## FIGURES

|  |    |
|--|----|
| FIGURE 4-1 : SSD1305 BLOCK DIAGRAM.....  | 9  |
| FIGURE 5-1 : SSD1305Z DIE DRAWING.....   | 10 |
| FIGURE 5-2 : SSD1305Z ALIGNMENT MARKS DIMENSION.....   | 11 |
| FIGURE 6-1 : SSD1305T6R1 PIN ASSIGNMENT .....  | 13 |
| FIGURE 6-2 : SSD1305T7R1 PIN ASSIGNMENT .....  | 15 |
| FIGURE 8-1 : DATA READ BACK PROCEDURE - INSERTION OF DUMMY READ.....   | 20 |
| FIGURE 8-2 : EXAMPLE OF WRITE PROCEDURE IN 8080 PARALLEL INTERFACE MODE .....  | 20 |
| FIGURE 8-3 : EXAMPLE OF READ PROCEDURE IN 8080 PARALLEL INTERFACE MODE.....  | 20 |
| FIGURE 8-4 : DISPLAY DATA READ BACK PROCEDURE - INSERTION OF DUMMY READ .....  | 21 |
| FIGURE 8-5 : WRITE PROCEDURE IN SPI MODE.....  | 22 |
| FIGURE 8-6 : I <sup>2</sup> C -BUS DATA FORMAT.....  | 23 |
| FIGURE 8-7 : DEFINITION OF THE START AND STOP CONDITION.....   | 24 |
| FIGURE 8-8 : DEFINITION OF THE ACKNOWLEDGEMENT CONDITION.....  | 25 |
| FIGURE 8-9 : DEFINITION OF THE DATA TRANSFER CONDITION .....   | 25 |
| FIGURE 8-10 : OSCILLATOR CIRCUIT AND DISPLAY TIME GENERATOR .....  | 26 |
| FIGURE 8-11 : SEGMENT OUTPUT WAVEFORM IN THREE PHASES.....   | 28 |
| FIGURE 8-12 : SEGMENT OUTPUT WAVEFORM FOR TWO DIFFERENT COLORS LUT SETTING.....  | 28 |
| FIGURE 8-13 : EXAMPLE OF SEGMENT OUTPUT WAVEFORM OF MONOCHROME DISPLAY SECTION<br>UNDER MONOCHROME MODE .....          | 29 |
| FIGURE 8-14 : EXAMPLE OF SEGMENT OUTPUT WAVEFORM OF AREA COLOR DISPLAY SECTION UNDER<br>AREA COLOR MODE.....           | 29 |
| FIGURE 8-15 : GDDRAM PAGES STRUCTURE OF SSD1305 .....  | 30 |
| FIGURE 8-16 : ENLARGEMENT OF GDDRAM (NO ROW RE-MAPPING AND COLUMN-RE-MAPPING) .....                                    | 30 |
| FIGURE 8-17 : EXAMPLE OF AREA COLOR ASSIGNMENT ON A 132X64 OLED PANEL .....  | 31 |
| FIGURE 8-18 : I <sub>REF</sub> CURRENT SETTING BY RESISTOR VALUE .....   | 32 |
| FIGURE 8-19 : THE POWER ON SEQUENCE .....  | 33 |
| FIGURE 8-20 : THE POWER OFF SEQUENCE .....   | 33 |
| FIGURE 10-1 : ADDRESS POINTER MOVEMENT OF PAGE ADDRESSING MODE .....   | 41 |
| FIGURE 10-2 : EXAMPLE OF GDDRAM ACCESS POINTER SETTING IN PAGE ADDRESSING MODE (NO<br>ROW AND COLUMN-RE-MAPPING) ..... | 41 |
| FIGURE 10-3 : ADDRESS POINTER MOVEMENT OF HORIZONTAL ADDRESSING MODE.....  | 42 |
| FIGURE 10-4 : ADDRESS POINTER MOVEMENT OF VERTICAL ADDRESSING MODE .....   | 42 |
| FIGURE 10-5 : EXAMPLE OF COLUMN AND ROW ADDRESS POINTER MOVEMENT.....  | 43 |
| FIGURE 10-6 : SEGMENT CURRENT VS CONTRAST SETTING .....  | 44 |
| FIGURE 10-7 : TRANSITION BETWEEN DIFFERENT MODES .....   | 46 |
| FIGURE 10-8 : TYPICAL OSCILLATOR FREQUENCY ADJUSTMENT BY D5 COMMAND (V <sub>DD</sub> = 2.8V).....                      | 49 |
| FIGURE 10-9 : HORIZONTAL SCROLL EXAMPLE: SCROLL RIGHT BY 4 COLUMNS .....   | 54 |
| FIGURE 10-10 : HORIZONTAL SCROLL EXAMPLE: SCROLL LEFT BY 2 COLUMNS .....   | 54 |
| FIGURE 10-11 : HORIZONTAL SCROLLING SETUP EXAMPLE .....  | 54 |
| FIGURE 10-12 : CONTINUOUS VERTICAL AND HORIZONTAL SCROLLING SETUP EXAMPLES.....  | 55 |
| FIGURE 10-13 : CONTINUOUS VERTICAL AND HORIZONTAL SCROLLING EXAMPLE: WITH SETTING IN<br>MUX RATIO .....                | 56 |
| FIGURE 10-14 : VERTICAL SCROLL AREA SETUP EXAMPLES .....   | 57 |
| FIGURE 13-1 : 6800-SERIES MCU PARALLEL INTERFACE CHARACTERISTICS .....   | 61 |
| FIGURE 13-2 : 8080-SERIES PARALLEL INTERFACE CHARACTERISTICS (FORM 1) .....  | 62 |
| FIGURE 13-3 : 8080-SERIES PARALLEL INTERFACE CHARACTERISTICS (FORM 2) .....  | 62 |
| FIGURE 13-4 : SERIAL INTERFACE CHARACTERISTICS .....   | 63 |
| FIGURE 13-5 : I <sup>2</sup> C INTERFACE TIMING CHARACTERISTICS .....  | 64 |
| FIGURE 14-1 : APPLICATION EXAMPLE OF SSD1305T6R1 .....   | 65 |

FIGURE 15-1 SSD1305Z DIE TRAY INFORMATION ..... 66

FIGURE 15-2 SSD1305T6R1 DETAIL DIMENSION ..... 67

FIGURE 15-3 SSD1305T7R1 DETAIL DIMENSION ..... 69

FIGURE 15-4 SSD1305Z3 DIE TRAY INFORMATION ..... 70

## 1 GENERAL DESCRIPTION

The SSD1305 is a CMOS OLED/PLED driver with controller for organic/polymer light emitting diode dot-matrix graphic display system. It consists of 132 segments and 64 commons that can support a maximum display resolution of 132x64. There are 4-color selections to support monochrome or area color OLED/PLED. This IC is designed for Common Cathode type OLED panel.

The SSD1305 embeds with contrast control, display RAM and oscillator, which reduces the number of external components and power consumption. It has 256-step brightness control and separate power for I/O interface logic. It is suitable for many compact portable applications, such as mobile phone sub-display, calculator and MP3 player, etc.

## 2 FEATURES

- Resolution: 132 x 64 dot matrix panel
- Area color support with 4 Color Selection and 64 steps per color
- Power supply:
  - $V_{DD} = 2.4V$  to  $3.5V$  for IC logic
  - $V_{CC} = 7.0V$  to  $15.0V$  for Panel driving
  - $V_{DDIO} = 1.6V$  to  $V_{DD}$  for MCU interface
- Segment maximum source current: 320uA
- Common maximum sink current: 45mA
- Embedded 132 x 64 bit SRAM display buffer
- 256-step Contrast Control
- 8-bit 6800-series Parallel Interface, 8-bit 8080-series Parallel Interface, Serial Peripheral Interface, I<sup>2</sup>C Interface
- Row Re-mapping and Column Re-mapping
- Continuous Horizontal, Vertical and Diagonal Scrolling
- Dim Mode operations
- Programmable Frame Frequency and Multiplexing Ratio
- On-Chip Oscillator
- Low power consumption
- Wide range of operating temperatures: -40 to 85 °C


## 3 ORDERING INFORMATION

Table 3-1 : Ordering Information

| Ordering Part Number | SEG | COM | Package Form  | Reference   | Remark  |
|----------------------|-----|-----|---------------|-------------|---|
| SSD1305Z             | 132 | 64  | Gold Bump Die | Page 10, 66 | <ul style="list-style-type: none"><li>• Min SEG pad pitch: 52um</li><li>• Min COM pad pitch: 45um</li></ul>   |
| SSD1305T6R1          | 132 | 64  | TAB           | Page 13 ,67 | <ul style="list-style-type: none"><li>• 35mm film, 4 sprocket hole</li><li>• Folding TAB</li><li>• 8-bit 80 / 8-bit 68 / SPI / I<sup>2</sup>C interface</li><li>• SEG lead pitch 0.120mm x 0.998 =0.11976mm</li><li>• COM lead pitch 0.120mm x 0.998 =0.11976mm</li></ul> |
| SSD1305T7R1          | 132 | 64  | TAB           | Page 15, 69 | <ul style="list-style-type: none"><li>• 35mm film, 4 sprocket hole</li><li>• Folding TAB</li><li>• 8-bit 80 / 8-bit 68 / SPI / I<sup>2</sup>C interface</li><li>• SEG lead pitch 0.120mm x 0.998 =0.11976mm</li><li>• COM lead pitch 0.120mm x 0.998 =0.11976mm</li></ul> |
| SSD1305Z3            | 132 | 64  | Gold Bump Die | Page 70     | <ul style="list-style-type: none"><li>• Die Thickness : 300 um ± 25 um</li></ul>  |


## 4 BLOCK DIAGRAM

Figure 4-1 : SSD1305 Block Diagram

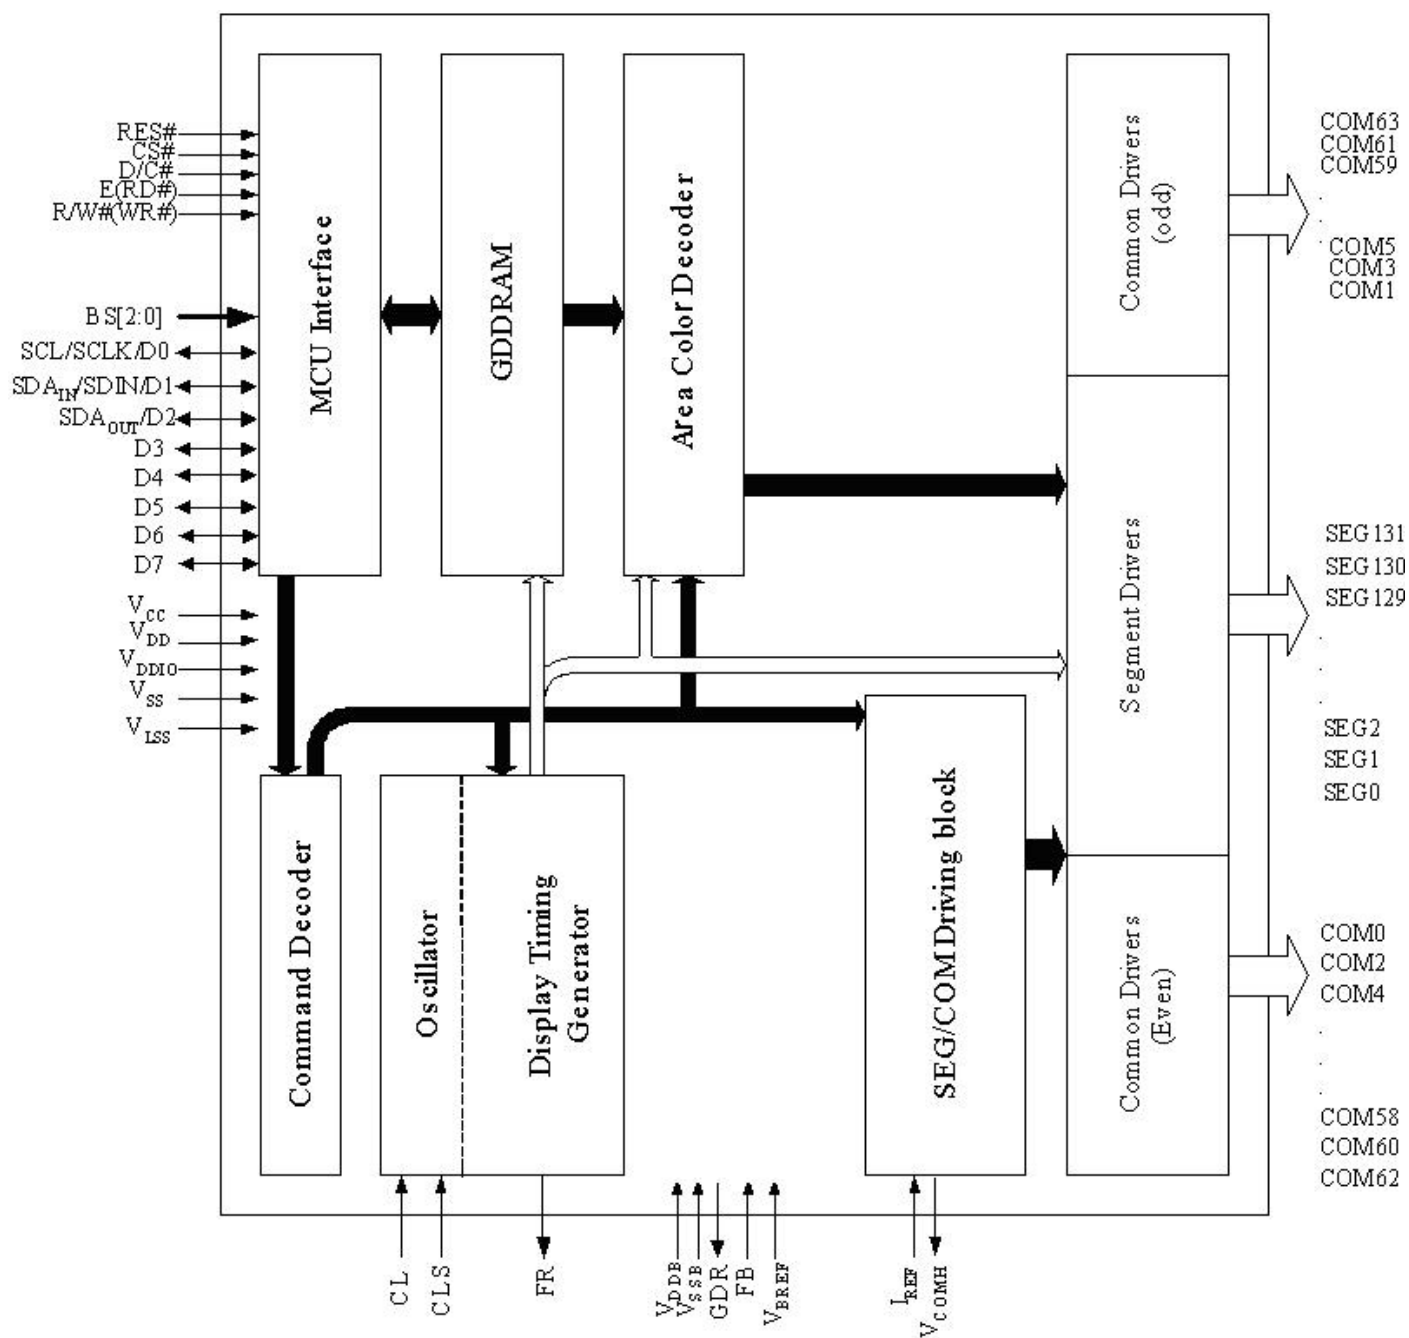

## 5 DIE PAD FLOOR PLAN

Figure 5-1 : SSD1305Z Die Drawing

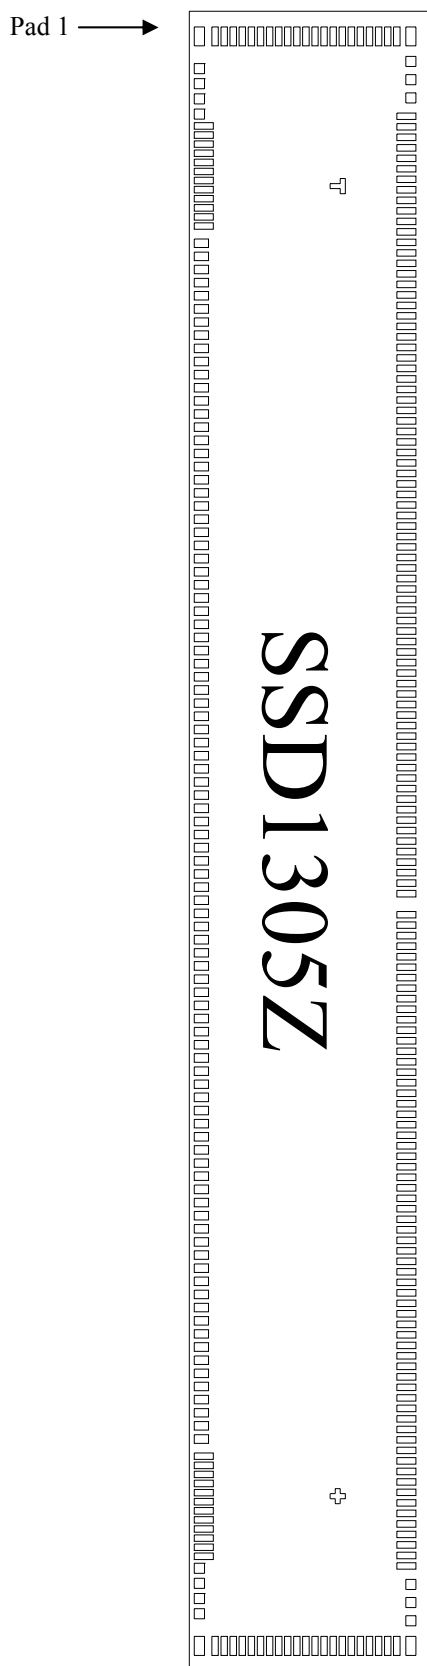

### Alignment marks

(For details dimension please see p.9)

|         | Position     | Size        |
|---------|--------------|-------------|
| T shape | (-3240, 139) | 75um x 75um |
| + shape | (3240, 139)  | 75um x 75um |

|                   |                    |
|-------------------|--------------------|
| Die Size          | 8.2mm x 1.2mm      |
| Die Thickness     | 457 um $\pm$ 25 um |
| Min I/O pad pitch | 65 um              |
| Min SEG pad pitch | 52 um              |
| Min COM pad pitch | 45 um              |
| Bump Height       | Nominal 15 um      |

| Bump Size                      |        |        |
|--------------------------------|--------|--------|
| Pad #                          | X [um] | Y [um] |
| 1, 126, 148, 293               | 94     | 50     |
| 18-109                         | 42     | 70     |
| 2-5, 122-125, 149-151, 290-292 | 50     | 50     |
| 6-17, 110-121, 152-289         | 32     | 94     |
| 127-147, 294-314               | 94     | 32     |



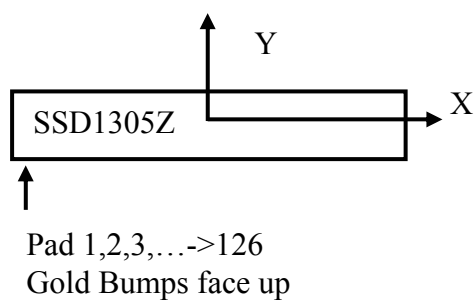


Figure 5-2 : SSD1305Z Alignment Marks Dimension

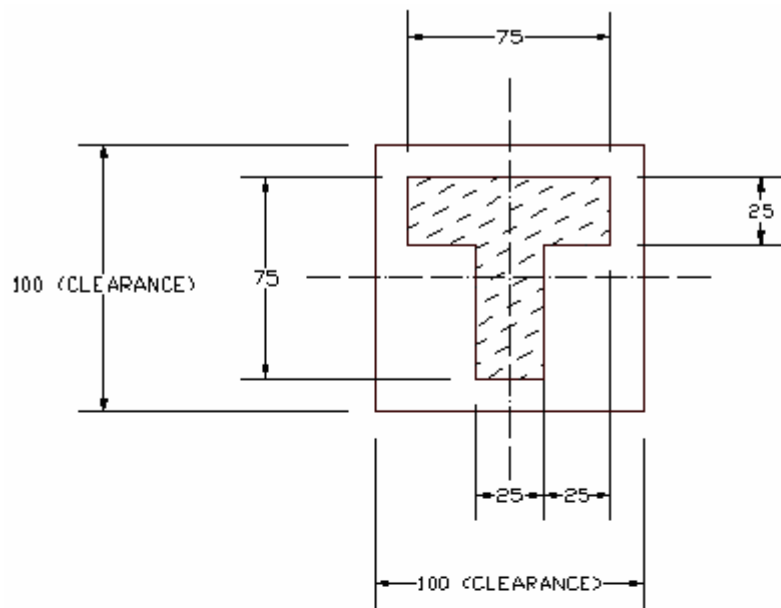

T shape

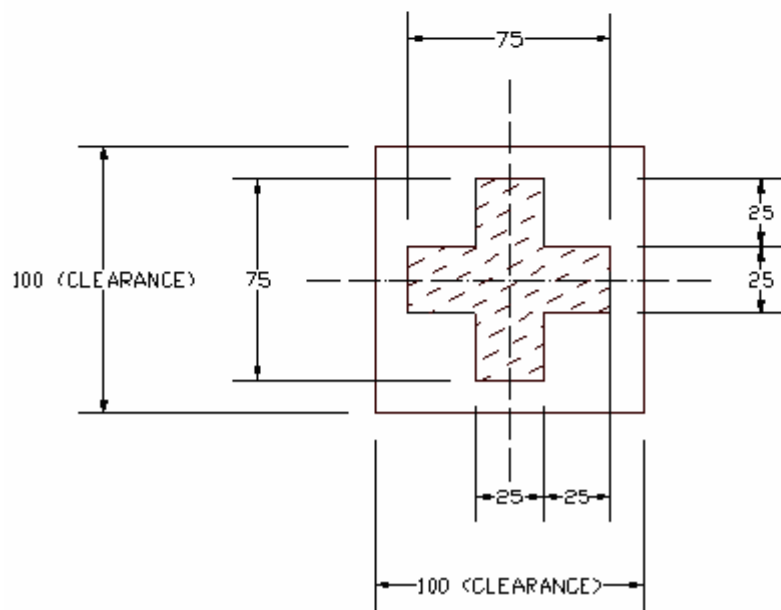

+ shape

Unit in um

**Table 5-1 : SSD1305Z Bump Die Pad Coordinates**

| Pad no. | Pad Name  | X-pos   | Y-pos  | Pad no. | Pad Name | X-pos  | Y-pos  | Pad no. | Pad Name | X-pos   | Y-pos | Pad no. | Pad Name | X-pos   | Y-pos  |
|---------|-----------|---------|--------|---------|----------|--------|--------|---------|----------|---------|-------|---------|----------|---------|--------|
| 1       | NC        | -3980.5 | -546.0 | 81      | VDDIO    | 1137.5 | -536.0 | 161     | SEG6     | 3117.6  | 479.1 | 241     | SEG86    | -1091.2 | 479.1  |
| 2       | NC        | -3821.5 | -546.0 | 82      | D0       | 1202.5 | -536.0 | 162     | SEG7     | 3065.7  | 479.1 | 242     | SEG87    | -1143.1 | 479.1  |
| 3       | NC        | -3746.5 | -546.0 | 83      | D1       | 1267.5 | -536.0 | 163     | SEG8     | 3013.7  | 479.1 | 243     | SEG88    | -1195.1 | 479.1  |
| 4       | NC        | -3671.5 | -546.0 | 84      | D2       | 1332.5 | -536.0 | 164     | SEG9     | 2961.7  | 479.1 | 244     | SEG89    | -1247.0 | 479.1  |
| 5       | NC        | -3596.5 | -546.0 | 85      | D3       | 1397.5 | -536.0 | 165     | SEG10    | 2909.8  | 479.1 | 245     | SEG90    | -1299.0 | 479.1  |
| 6       | COM53     | -3537.5 | -524.0 | 86      | VSS      | 1462.5 | -536.0 | 166     | SEG11    | 2857.8  | 479.1 | 246     | SEG91    | -1351.0 | 479.1  |
| 7       | COM54     | -3492.5 | -524.0 | 87      | D4       | 1527.5 | -536.0 | 167     | SEG12    | 2805.9  | 479.1 | 247     | SEG92    | -1402.9 | 479.1  |
| 8       | COM55     | -3447.5 | -524.0 | 88      | D5       | 1592.5 | -536.0 | 168     | SEG13    | 2753.9  | 479.1 | 248     | SEG93    | -1454.9 | 479.1  |
| 9       | COM56     | -3402.5 | -524.0 | 89      | D6       | 1657.5 | -536.0 | 169     | SEG14    | 2701.9  | 479.1 | 249     | SEG94    | -1506.8 | 479.1  |
| 10      | COM57     | -3357.5 | -524.0 | 90      | D7       | 1722.5 | -536.0 | 170     | SEG15    | 2650.0  | 479.1 | 250     | SEG95    | -1558.8 | 479.1  |
| 11      | COM58     | -3312.5 | -524.0 | 91      | VSS      | 1787.5 | -536.0 | 171     | SEG16    | 2598.0  | 479.1 | 251     | SEG96    | -1610.8 | 479.1  |
| 12      | COM59     | -3267.5 | -524.0 | 92      | CLS      | 1852.5 | -536.0 | 172     | SEG17    | 2546.1  | 479.1 | 252     | SEG97    | -1662.7 | 479.1  |
| 13      | COM60     | -3222.5 | -524.0 | 93      | VDDIO    | 1917.5 | -536.0 | 173     | SEG18    | 2494.1  | 479.1 | 253     | SEG98    | -1714.7 | 479.1  |
| 14      | COM61     | -3177.5 | -524.0 | 94      | VDDIO    | 1982.5 | -536.0 | 174     | SEG19    | 2442.1  | 479.1 | 254     | SEG99    | -1766.6 | 479.1  |
| 15      | COM62     | -3132.5 | -524.0 | 95      | VDD      | 2047.5 | -536.0 | 175     | SEG20    | 2390.2  | 479.1 | 255     | SEG100   | -1818.6 | 479.1  |
| 16      | COM63     | -3087.5 | -524.0 | 96      | VDD      | 2112.5 | -536.0 | 176     | SEG21    | 2338.2  | 479.1 | 256     | SEG101   | -1870.6 | 479.1  |
| 17      | NC        | -3042.5 | -524.0 | 97      | VDD      | 2177.5 | -536.0 | 177     | SEG22    | 2286.3  | 479.1 | 257     | SEG102   | -1922.5 | 479.1  |
| 18      | NC        | -2957.5 | -536.0 | 98      | IREF     | 2242.5 | -536.0 | 178     | SEG23    | 2234.3  | 479.1 | 258     | SEG103   | -1974.5 | 479.1  |
| 19      | VCC       | -2892.5 | -536.0 | 99      | VCOMH    | 2307.5 | -536.0 | 179     | SEG24    | 2182.3  | 479.1 | 259     | SEG104   | -2026.4 | 479.1  |
| 20      | VCC       | -2827.5 | -536.0 | 100     | VCC      | 2372.5 | -536.0 | 180     | SEG25    | 2130.4  | 479.1 | 260     | SEG105   | -2078.4 | 479.1  |
| 21      | VCC       | -2762.5 | -536.0 | 101     | VCC      | 2437.5 | -536.0 | 181     | SEG26    | 2078.4  | 479.1 | 261     | SEG106   | -2130.4 | 479.1  |
| 22      | VCOMH     | -2697.5 | -536.0 | 102     | VCC      | 2502.5 | -536.0 | 182     | SEG27    | 2026.5  | 479.1 | 262     | SEG107   | -2182.3 | 479.1  |
| 23      | VLSS      | -2632.5 | -536.0 | 103     | VCC      | 2567.5 | -536.0 | 183     | SEG28    | 1974.5  | 479.1 | 263     | SEG108   | -2234.3 | 479.1  |
| 24      | VLSS      | -2567.5 | -536.0 | 104     | VCC      | 2632.5 | -536.0 | 184     | SEG29    | 1922.5  | 479.1 | 264     | SEG109   | -2286.2 | 479.1  |
| 25      | VLSS      | -2502.5 | -536.0 | 105     | VCC      | 2697.5 | -536.0 | 185     | SEG30    | 1870.6  | 479.1 | 265     | SEG110   | -2338.2 | 479.1  |
| 26      | VSS       | -2437.5 | -536.0 | 106     | VLSS     | 2762.5 | -536.0 | 186     | SEG31    | 1818.6  | 479.1 | 266     | SEG111   | -2390.2 | 479.1  |
| 27      | VSS       | -2372.5 | -536.0 | 107     | VLSS     | 2827.5 | -536.0 | 187     | SEG32    | 1766.7  | 479.1 | 267     | SEG112   | -2442.1 | 479.1  |
| 28      | TR11      | -2307.5 | -536.0 | 108     | VLSS     | 2892.5 | -536.0 | 188     | SEG33    | 1714.7  | 479.1 | 268     | SEG113   | -2494.1 | 479.1  |
| 29      | TR10      | -2242.5 | -536.0 | 109     | NC       | 2957.5 | -536.0 | 189     | SEG34    | 1662.7  | 479.1 | 269     | SEG114   | -2546.0 | 479.1  |
| 30      | TR9       | -2177.5 | -536.0 | 110     | NC       | 3042.5 | -524.0 | 190     | SEG35    | 1610.8  | 479.1 | 270     | SEG115   | -2598.0 | 479.1  |
| 31      | TR8       | -2112.5 | -536.0 | 111     | COM31    | 3087.5 | -524.0 | 191     | SEG36    | 1558.8  | 479.1 | 271     | SEG116   | -2650.0 | 479.1  |
| 32      | TR7       | -2047.5 | -536.0 | 112     | COM30    | 3132.5 | -524.0 | 192     | SEG37    | 1506.9  | 479.1 | 272     | SEG117   | -2701.9 | 479.1  |
| 33      | TR6       | -1982.5 | -536.0 | 113     | COM29    | 3177.5 | -524.0 | 193     | SEG38    | 1454.9  | 479.1 | 273     | SEG118   | -2753.9 | 479.1  |
| 34      | VSS       | -1917.5 | -536.0 | 114     | COM28    | 3222.5 | -524.0 | 194     | SEG39    | 1402.9  | 479.1 | 274     | SEG119   | -2805.8 | 479.1  |
| 35      | TR5       | -1852.5 | -536.0 | 115     | COM27    | 3267.5 | -524.0 | 195     | SEG40    | 1351.0  | 479.1 | 275     | SEG120   | -2857.8 | 479.1  |
| 36      | TR4       | -1787.5 | -536.0 | 116     | COM26    | 3312.5 | -524.0 | 196     | SEG41    | 1299.0  | 479.1 | 276     | SEG121   | -2909.8 | 479.1  |
| 37      | TR3       | -1722.5 | -536.0 | 117     | COM25    | 3357.5 | -524.0 | 197     | SEG42    | 1247.1  | 479.1 | 277     | SEG122   | -2961.7 | 479.1  |
| 38      | TR2       | -1657.5 | -536.0 | 118     | COM24    | 3402.5 | -524.0 | 198     | SEG43    | 1195.1  | 479.1 | 278     | SEG123   | -3013.7 | 479.1  |
| 39      | TR1       | -1592.5 | -536.0 | 119     | COM23    | 3447.5 | -524.0 | 199     | SEG44    | 1143.1  | 479.1 | 279     | SEG124   | -3065.6 | 479.1  |
| 40      | TR0       | -1527.5 | -536.0 | 120     | COM22    | 3492.5 | -524.0 | 200     | SEG45    | 1091.2  | 479.1 | 280     | SEG125   | -3117.6 | 479.1  |
| 41      | VSS       | -1462.5 | -536.0 | 121     | COM21    | 3537.5 | -524.0 | 201     | SEG46    | 1039.2  | 479.1 | 281     | SEG126   | -3169.6 | 479.1  |
| 42      | VSSB      | -1397.5 | -536.0 | 122     | NC       | 3596.5 | -546.0 | 202     | SEG47    | 987.3   | 479.1 | 282     | SEG127   | -3221.5 | 479.1  |
| 43      | GDR       | -1332.5 | -536.0 | 123     | NC       | 3671.5 | -546.0 | 203     | SEG48    | 935.3   | 479.1 | 283     | SEG128   | -3273.5 | 479.1  |
| 44      | GDR       | -1267.5 | -536.0 | 124     | NC       | 3746.5 | -546.0 | 204     | SEG49    | 883.3   | 479.1 | 284     | SEG129   | -3325.4 | 479.1  |
| 45      | VDDB      | -1202.5 | -536.0 | 125     | NC       | 3821.5 | -546.0 | 205     | SEG50    | 831.4   | 479.1 | 285     | SEG130   | -3377.4 | 479.1  |
| 46      | VDDB      | -1137.5 | -536.0 | 126     | NC       | 3980.5 | -546.0 | 206     | SEG51    | 779.4   | 479.1 | 286     | SEG131   | -3429.4 | 479.1  |
| 47      | VDDB      | -1072.5 | -536.0 | 127     | COM20    | 3980.5 | -468.4 | 207     | SEG52    | 727.5   | 479.1 | 287     | NC       | -3481.3 | 479.1  |
| 48      | FB        | -1007.5 | -536.0 | 128     | COM19    | 3980.5 | -423.4 | 208     | SEG53    | 675.5   | 479.1 | 288     | NC       | -3533.3 | 479.1  |
| 49      | VBREF     | -942.5  | -536.0 | 129     | COM18    | 3980.5 | -378.4 | 209     | SEG54    | 623.5   | 479.1 | 289     | NC       | -3585.2 | 479.1  |
| 50      | BGGND     | -877.5  | -536.0 | 130     | COM17    | 3980.5 | -333.4 | 210     | SEG55    | 571.6   | 479.1 | 290     | NC       | -3676.5 | 501.1  |
| 51      | VSS       | -812.5  | -536.0 | 131     | COM16    | 3980.5 | -288.4 | 211     | SEG56    | 519.6   | 479.1 | 291     | NC       | -3766.5 | 501.1  |
| 52      | VDDB      | -747.5  | -536.0 | 132     | COM15    | 3980.5 | -243.4 | 212     | SEG57    | 467.7   | 479.1 | 292     | NC       | -3856.5 | 501.1  |
| 53      | VCIR      | -682.5  | -536.0 | 133     | COM14    | 3980.5 | -198.4 | 213     | SEG58    | 415.7   | 479.1 | 293     | NC       | -3980.5 | 501.1  |
| 54      | VCIR      | -617.5  | -536.0 | 134     | COM13    | 3980.5 | -153.4 | 214     | SEG59    | 363.7   | 479.1 | 294     | COM32    | -3980.5 | 431.6  |
| 55      | VDD       | -552.5  | -536.0 | 135     | COM12    | 3980.5 | -108.4 | 215     | SEG60    | 259.8   | 479.1 | 295     | COM33    | -3980.5 | 386.6  |
| 56      | VDD       | -487.5  | -536.0 | 136     | COM11    | 3980.5 | -63.4  | 216     | SEG61    | 207.9   | 479.1 | 296     | COM34    | -3980.5 | 341.6  |
| 57      | VDD       | -422.5  | -536.0 | 137     | COM10    | 3980.5 | -18.4  | 217     | SEG62    | 155.9   | 479.1 | 297     | COM35    | -3980.5 | 296.6  |
| 58      | VDD       | -357.5  | -536.0 | 138     | COM9     | 3980.5 | 26.6   | 218     | SEG63    | 103.9   | 479.1 | 298     | COM36    | -3980.5 | 251.6  |
| 59      | VDDIO     | -292.5  | -536.0 | 139     | COM8     | 3980.5 | 71.6   | 219     | SEG64    | 52.0    | 479.1 | 299     | COM37    | -3980.5 | 206.6  |
| 60      | VDDIO     | -227.5  | -536.0 | 140     | COM7     | 3980.5 | 116.6  | 220     | SEG65    | 0.0     | 479.1 | 300     | COM38    | -3980.5 | 161.6  |
| 61      | VDDIO     | -162.5  | -536.0 | 141     | COM6     | 3980.5 | 161.6  | 221     | SEG66    | -52.0   | 479.1 | 301     | COM39    | -3980.5 | 116.6  |
| 62      | VCC       | -97.5   | -536.0 | 142     | COM5     | 3980.5 | 206.6  | 222     | SEG67    | -103.9  | 479.1 | 302     | COM40    | -3980.5 | 71.6   |
| 63      | VCC       | -32.5   | -536.0 | 143     | COM4     | 3980.5 | 251.6  | 223     | SEG68    | -155.9  | 479.1 | 303     | COM41    | -3980.5 | 26.6   |
| 64      | VCC       | 32.5    | -536.0 | 144     | COM3     | 3980.5 | 296.6  | 224     | SEG69    | -207.8  | 479.1 | 304     | COM42    | -3980.5 | -18.4  |
| 65      | VDDIO     | 97.5    | -536.0 | 145     | COM2     | 3980.5 | 341.6  | 225     | SEG70    | -259.8  | 479.1 | 305     | COM43    | -3980.5 | -63.4  |
| 66      | BS0       | 162.5   | -536.0 | 146     | COM1     | 3980.5 | 386.6  | 226     | SEG71    | -311.8  | 479.1 | 306     | COM44    | -3980.5 | -108.4 |
| 67      | VSS       | 227.5   | -536.0 | 147     | COM0     | 3980.5 | 431.6  | 227     | SEG72    | -363.7  | 479.1 | 307     | COM45    | -3980.5 | -153.4 |
| 68      | BS1       | 292.5   | -536.0 | 148     | NC       | 3980.5 | 501.1  | 228     | SEG73    | -415.7  | 479.1 | 308     | COM46    | -3980.5 | -198.4 |
| 69      | VDDIO     | 357.5   | -536.0 | 149     | NC       | 3856.5 | 501.1  | 229     | SEG74    | -467.6  | 479.1 | 309     | COM47    | -3980.5 | -243.4 |
| 70      | BS2       | 422.5   | -536.0 | 150     | NC       | 3766.5 | 501.1  | 230     | SEG75    | -519.6  | 479.1 | 310     | COM48    | -3980.5 | -288.4 |
| 71      | VSS       | 487.5   | -536.0 | 151     | NC       | 3676.5 | 501.1  | 231     | SEG76    | -571.6  | 479.1 | 311     | COM49    | -3980.5 | -333.4 |
| 72      | FR        | 552.5   | -536.0 | 152     | NC       | 3585.2 | 479.1  | 232     | SEG77    | -623.5  | 479.1 | 312     | COM50    | -3980.5 | -378.4 |
| 73      | CL        | 617.5   | -536.0 | 153     | NC       | 3533.3 | 479.1  | 233     | SEG78    | -675.5  | 479.1 | 313     | COM51    | -3980.5 | -423.4 |
| 74      | VSS       | 682.5   | -536.0 | 154     | NC       | 3481.3 | 479.1  | 234     | SEG79    | -727.4  | 479.1 | 314     | COM52    | -3980.5 | -468.4 |
| 75      | CS#       | 747.5   | -536.0 | 155     | SEG0     | 3429.4 | 479.1  | 235     | SEG80    | -779.4  | 479.1 |         |          |         |        |
| 76      | RES#      | 812.5   | -536.0 | 156     | SEG1     | 3377.4 | 479.1  | 236     | SEG81    | -831.4  | 479.1 |         |          |         |        |
| 77      | D/C#      | 877.5   | -536.0 | 157     | SEG2     | 3325.5 | 479.1  | 237     | SEG82    | -883.3  | 479.1 |         |          |         |        |
| 78      | VSS       | 942.5   | -536.0 | 158     | SEG3     | 3273.5 | 479.1  | 238     | SEG83    | -935.3  | 479.1 |         |          |         |        |
| 79      | R/W#(WR#) | 1007.5  | -536.0 | 159     | SEG4     | 3221.5 | 479.1  | 239     | SEG84    | -987.2  | 479.1 |         |          |         |        |
| 80      | E(RD#)    | 1072.5  | -536.0 | 160     | SEG5     | 3169.6 | 479.1  | 240     | SEG85    | -1039.2 | 479.1 |         |          |         |        |

## 6.1 SSD1305T6R1 pin assignment

|    |        |     |       |
|----|--------|-----|-------|
| 1  | NC     | 249 | NC    |
| 2  | VCC    | 248 | NC    |
| 3  | VCOMH  | 247 | CDM62 |
| 4  | IREF   | 246 | CDM60 |
| 5  | D7     | 245 | CDM58 |
| 6  | D6     | 244 | CDM56 |
| 7  | D5     |     |       |
| 8  | D4     | 219 | CDM6  |
| 9  | D3     | 218 | CDM4  |
| 10 | D2     | 217 | CDM2  |
| 11 | D1     | 216 | CDM0  |
| 12 | D0     | 215 | NC    |
| 13 | E(RD#) | 214 | NC    |
| 14 | R/W#   | 213 | NC    |
| 15 | D/C#   | 212 | NC    |
| 16 | RES#   | 211 | NC    |
| 17 | CS#    | 210 | NC    |
| 18 | FR     | 209 | NC    |
| 19 | BS2    | 208 | NC    |
| 20 | BS1    | 207 | NC    |
| 21 | VDDIO  | 206 | NC    |
| 22 | VDD    | 205 | NC    |
| 23 | VCIR   | 204 | SEG0  |
| 24 | BGGND  | 203 | SEG1  |
| 25 | VBREF  | 202 | SEG2  |
| 26 | NC     | 201 | SEG3  |
| 27 | FB     |     |       |
| 28 | VDDB   | 80  | SEG24 |
| 29 | GDR    | 79  | SEG25 |
| 30 | VSS    | 78  | SEG26 |
| 31 | NC     | 77  | SEG27 |
|    |        | 76  | SEG28 |
|    |        | 75  | SEG29 |
|    |        | 74  | SEG30 |
|    |        | 73  | SEG31 |
|    |        | 72  | NC    |
|    |        | 71  | NC    |
|    |        | 70  | NC    |
|    |        | 69  | NC    |
|    |        | 68  | NC    |
|    |        | 67  | NC    |
|    |        | 66  | NC    |
|    |        | 65  | CDM1  |
|    |        | 64  | CDM3  |
|    |        | 63  | CDM5  |
|    |        | 62  | CDM7  |
|    |        |     |       |
|    |        | 37  | CDM57 |
|    |        | 36  | CDM59 |
|    |        | 35  | CDM61 |
|    |        | 34  | CDM63 |
|    |        | 33  | NC    |
|    |        | 32  | NC    |




**Table 6-1 : SSD1305T6R1 Pin Assignment Table**

| Pin# | Name   | Pin# | Name   | Pin# | Name  | Pin# | Name  |
|------|--------|------|--------|------|-------|------|-------|
| 1    | NC     | 81   | SEG123 | 161  | SEG43 | 241  | COM50 |
| 2    | VCC    | 82   | SEG122 | 162  | SEG42 | 242  | COM52 |
| 3    | VCOMH  | 83   | SEG121 | 163  | SEG41 | 243  | COM54 |
| 4    | IREF   | 84   | SEG120 | 164  | SEG40 | 244  | COM56 |
| 5    | D7     | 85   | SEG119 | 165  | SEG39 | 245  | COM58 |
| 6    | D6     | 86   | SEG118 | 166  | SEG38 | 246  | COM60 |
| 7    | D5     | 87   | SEG117 | 167  | SEG37 | 247  | COM62 |
| 8    | D4     | 88   | SEG116 | 168  | SEG36 | 248  | NC    |
| 9    | D3     | 89   | SEG115 | 169  | SEG35 | 249  | NC    |
| 10   | D2     | 90   | SEG114 | 170  | SEG34 |      |       |
| 11   | D1     | 91   | SEG113 | 171  | SEG33 |      |       |
| 12   | D0     | 92   | SEG112 | 172  | SEG32 |      |       |
| 13   | E(RD#) | 93   | SEG111 | 173  | SEG31 |      |       |
| 14   | R/W#   | 94   | SEG110 | 174  | SEG30 |      |       |
| 15   | D/C#   | 95   | SEG109 | 175  | SEG29 |      |       |
| 16   | RES#   | 96   | SEG108 | 176  | SEG28 |      |       |
| 17   | CS#    | 97   | SEG107 | 177  | SEG27 |      |       |
| 18   | FR     | 98   | SEG106 | 178  | SEG26 |      |       |
| 19   | BS2    | 99   | SEG105 | 179  | SEG25 |      |       |
| 20   | BS1    | 100  | SEG104 | 180  | SEG24 |      |       |
| 21   | VDDIO  | 101  | SEG103 | 181  | SEG23 |      |       |
| 22   | VDD    | 102  | SEG102 | 182  | SEG22 |      |       |
| 23   | VCIR   | 103  | SEG101 | 183  | SEG21 |      |       |
| 24   | BGGND  | 104  | SEG100 | 184  | SEG20 |      |       |
| 25   | VBREF  | 105  | SEG99  | 185  | SEG19 |      |       |
| 26   | NC     | 106  | SEG98  | 186  | SEG18 |      |       |
| 27   | FB     | 107  | SEG97  | 187  | SEG17 |      |       |
| 28   | VDDB   | 108  | SEG96  | 188  | SEG16 |      |       |
| 29   | GDR    | 109  | SEG95  | 189  | SEG15 |      |       |
| 30   | VSS    | 110  | SEG94  | 190  | SEG14 |      |       |
| 31   | NC     | 111  | SEG93  | 191  | SEG13 |      |       |
| 32   | NC     | 112  | SEG92  | 192  | SEG12 |      |       |
| 33   | NC     | 113  | SEG91  | 193  | SEG11 |      |       |
| 34   | COM63  | 114  | SEG90  | 194  | SEG10 |      |       |
| 35   | COM61  | 115  | SEG89  | 195  | SEG9  |      |       |
| 36   | COM59  | 116  | SEG88  | 196  | SEG8  |      |       |
| 37   | COM57  | 117  | SEG87  | 197  | SEG7  |      |       |
| 38   | COM55  | 118  | SEG86  | 198  | SEG6  |      |       |
| 39   | COM53  | 119  | SEG85  | 199  | SEG5  |      |       |
| 40   | COM51  | 120  | SEG84  | 200  | SEG4  |      |       |
| 41   | COM49  | 121  | SEG83  | 201  | SEG3  |      |       |
| 42   | COM47  | 122  | SEG82  | 202  | SEG2  |      |       |
| 43   | COM45  | 123  | SEG81  | 203  | SEG1  |      |       |
| 44   | COM43  | 124  | SEG80  | 204  | SEG0  |      |       |
| 45   | COM41  | 125  | SEG79  | 205  | NC    |      |       |
| 46   | COM39  | 126  | SEG78  | 206  | NC    |      |       |
| 47   | COM37  | 127  | SEG77  | 207  | NC    |      |       |
| 48   | COM35  | 128  | SEG76  | 208  | NC    |      |       |
| 49   | COM33  | 129  | SEG75  | 209  | NC    |      |       |
| 50   | COM31  | 130  | SEG74  | 210  | NC    |      |       |
| 51   | COM29  | 131  | SEG73  | 211  | NC    |      |       |
| 52   | COM27  | 132  | SEG72  | 212  | NC    |      |       |
| 53   | COM25  | 133  | SEG71  | 213  | NC    |      |       |
| 54   | COM23  | 134  | SEG70  | 214  | NC    |      |       |
| 55   | COM21  | 135  | SEG69  | 215  | NC    |      |       |
| 56   | COM19  | 136  | SEG68  | 216  | COM0  |      |       |
| 57   | COM17  | 137  | SEG67  | 217  | COM2  |      |       |
| 58   | COM15  | 138  | SEG66  | 218  | COM4  |      |       |
| 59   | COM13  | 139  | SEG65  | 219  | COM6  |      |       |
| 60   | COM11  | 140  | SEG64  | 220  | COM8  |      |       |
| 61   | COM9   | 141  | SEG63  | 221  | COM10 |      |       |
| 62   | COM7   | 142  | SEG62  | 222  | COM12 |      |       |
| 63   | COM5   | 143  | SEG61  | 223  | COM14 |      |       |
| 64   | COM3   | 144  | SEG60  | 224  | COM16 |      |       |
| 65   | COM1   | 145  | SEG59  | 225  | COM18 |      |       |
| 66   | NC     | 146  | SEG58  | 226  | COM20 |      |       |
| 67   | NC     | 147  | SEG57  | 227  | COM22 |      |       |
| 68   | NC     | 148  | SEG56  | 228  | COM24 |      |       |
| 69   | NC     | 149  | SEG55  | 229  | COM26 |      |       |
| 70   | NC     | 150  | SEG54  | 230  | COM28 |      |       |
| 71   | NC     | 151  | SEG53  | 231  | COM30 |      |       |
| 72   | NC     | 152  | SEG52  | 232  | COM32 |      |       |
| 73   | SEG131 | 153  | SEG51  | 233  | COM34 |      |       |
| 74   | SEG130 | 154  | SEG50  | 234  | COM36 |      |       |
| 75   | SEG129 | 155  | SEG49  | 235  | COM38 |      |       |
| 76   | SEG128 | 156  | SEG48  | 236  | COM40 |      |       |
| 77   | SEG127 | 157  | SEG47  | 237  | COM42 |      |       |
| 78   | SEG126 | 158  | SEG46  | 238  | COM44 |      |       |
| 79   | SEG125 | 159  | SEG45  | 239  | COM46 |      |       |
| 80   | SEG124 | 160  | SEG44  | 240  | COM48 |      |       |

6.2 SSD1305T7R1 pin assignment

Figure 6-2 : SSD1305T7R1 Pin Assignment

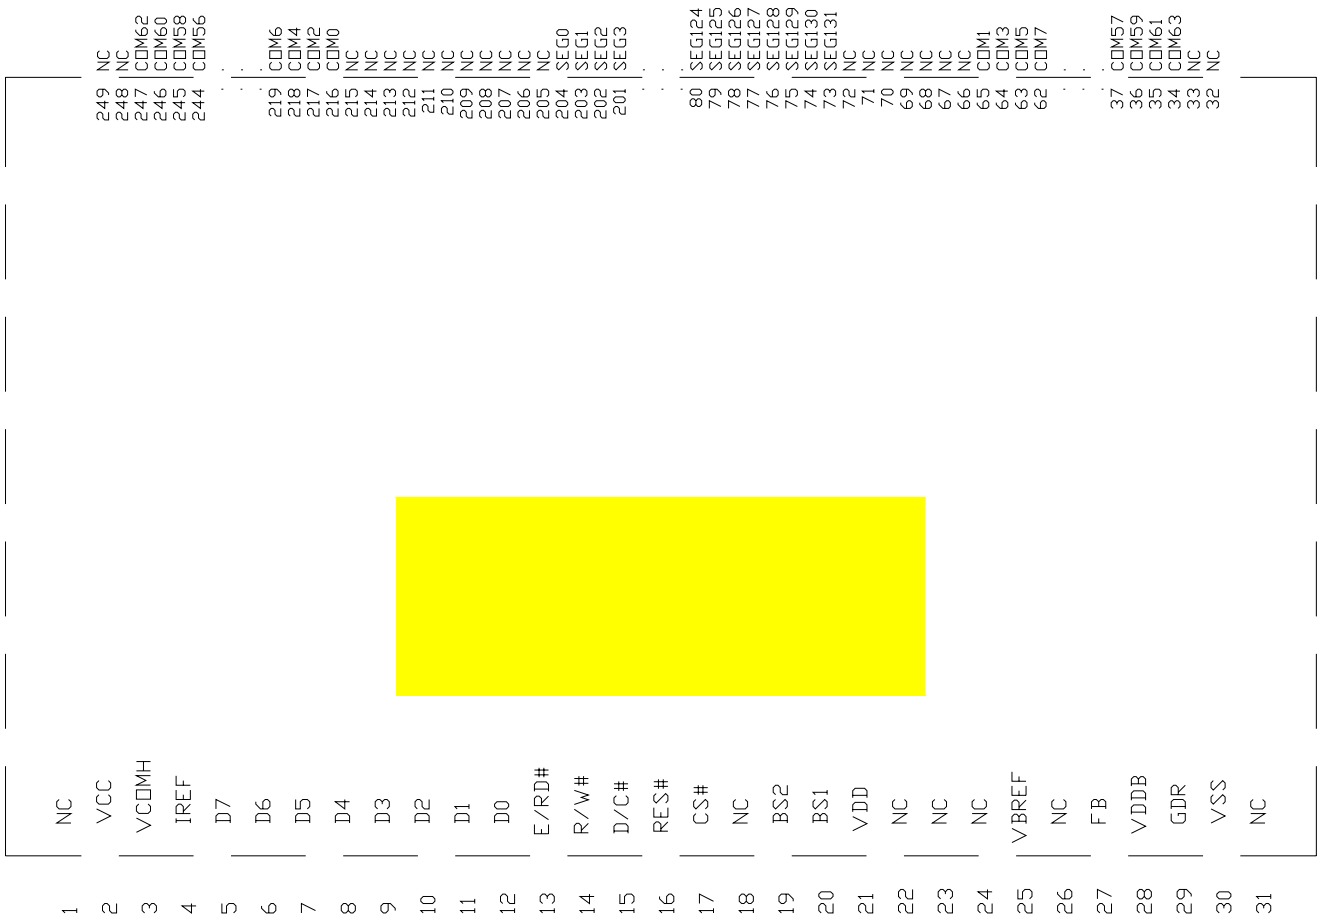

**Table 6-2 : SSD1305T7R1 Pin Assignment**

| Pin # | Name   | Pin # | Name   | Pin # | Name  | Pin # | Name  |
|-------|--------|-------|--------|-------|-------|-------|-------|
| 1     | NC     | 81    | SEG123 | 161   | SEG43 | 241   | COM50 |
| 2     | VCC    | 82    | SEG122 | 162   | SEG42 | 242   | COM52 |
| 3     | VCOMH  | 83    | SEG121 | 163   | SEG41 | 243   | COM54 |
| 4     | IREF   | 84    | SEG120 | 164   | SEG40 | 244   | COM56 |
| 5     | D7     | 85    | SEG119 | 165   | SEG39 | 245   | COM58 |
| 6     | D6     | 86    | SEG118 | 166   | SEG38 | 246   | COM60 |
| 7     | D5     | 87    | SEG117 | 167   | SEG37 | 247   | COM62 |
| 8     | D4     | 88    | SEG116 | 168   | SEG36 | 248   | NC    |
| 9     | D3     | 89    | SEG115 | 169   | SEG35 | 249   | NC    |
| 10    | D2     | 90    | SEG114 | 170   | SEG34 |       |       |
| 11    | D1     | 91    | SEG113 | 171   | SEG33 |       |       |
| 12    | D0     | 92    | SEG112 | 172   | SEG32 |       |       |
| 13    | E/RD#  | 93    | SEG111 | 173   | SEG31 |       |       |
| 14    | R/W#   | 94    | SEG110 | 174   | SEG30 |       |       |
| 15    | D/C#   | 95    | SEG109 | 175   | SEG29 |       |       |
| 16    | RES#   | 96    | SEG108 | 176   | SEG28 |       |       |
| 17    | CS#    | 97    | SEG107 | 177   | SEG27 |       |       |
| 18    | NC     | 98    | SEG106 | 178   | SEG26 |       |       |
| 19    | BS2    | 99    | SEG105 | 179   | SEG25 |       |       |
| 20    | BS1    | 100   | SEG104 | 180   | SEG24 |       |       |
| 21    | VDD    | 101   | SEG103 | 181   | SEG23 |       |       |
| 22    | NC     | 102   | SEG102 | 182   | SEG22 |       |       |
| 23    | NC     | 103   | SEG101 | 183   | SEG21 |       |       |
| 24    | NC     | 104   | SEG100 | 184   | SEG20 |       |       |
| 25    | VBREF  | 105   | SEG99  | 185   | SEG19 |       |       |
| 26    | NC     | 106   | SEG98  | 186   | SEG18 |       |       |
| 27    | FB     | 107   | SEG97  | 187   | SEG17 |       |       |
| 28    | VDDb   | 108   | SEG96  | 188   | SEG16 |       |       |
| 29    | GDR    | 109   | SEG95  | 189   | SEG15 |       |       |
| 30    | VSS    | 110   | SEG94  | 190   | SEG14 |       |       |
| 31    | NC     | 111   | SEG93  | 191   | SEG13 |       |       |
| 32    | NC     | 112   | SEG92  | 192   | SEG12 |       |       |
| 33    | NC     | 113   | SEG91  | 193   | SEG11 |       |       |
| 34    | COM63  | 114   | SEG90  | 194   | SEG10 |       |       |
| 35    | COM61  | 115   | SEG89  | 195   | SEG9  |       |       |
| 36    | COM59  | 116   | SEG88  | 196   | SEG8  |       |       |
| 37    | COM57  | 117   | SEG87  | 197   | SEG7  |       |       |
| 38    | COM55  | 118   | SEG86  | 198   | SEG6  |       |       |
| 39    | COM53  | 119   | SEG85  | 199   | SEG5  |       |       |
| 40    | COM51  | 120   | SEG84  | 200   | SEG4  |       |       |
| 41    | COM49  | 121   | SEG83  | 201   | SEG3  |       |       |
| 42    | COM47  | 122   | SEG82  | 202   | SEG2  |       |       |
| 43    | COM45  | 123   | SEG81  | 203   | SEG1  |       |       |
| 44    | COM43  | 124   | SEG80  | 204   | SEG0  |       |       |
| 45    | COM41  | 125   | SEG79  | 205   | NC    |       |       |
| 46    | COM39  | 126   | SEG78  | 206   | NC    |       |       |
| 47    | COM37  | 127   | SEG77  | 207   | NC    |       |       |
| 48    | COM35  | 128   | SEG76  | 208   | NC    |       |       |
| 49    | COM33  | 129   | SEG75  | 209   | NC    |       |       |
| 50    | COM31  | 130   | SEG74  | 210   | NC    |       |       |
| 51    | COM29  | 131   | SEG73  | 211   | NC    |       |       |
| 52    | COM27  | 132   | SEG72  | 212   | NC    |       |       |
| 53    | COM25  | 133   | SEG71  | 213   | NC    |       |       |
| 54    | COM23  | 134   | SEG70  | 214   | NC    |       |       |
| 55    | COM21  | 135   | SEG69  | 215   | NC    |       |       |
| 56    | COM19  | 136   | SEG68  | 216   | COM0  |       |       |
| 57    | COM17  | 137   | SEG67  | 217   | COM2  |       |       |
| 58    | COM15  | 138   | SEG66  | 218   | COM4  |       |       |
| 59    | COM13  | 139   | SEG65  | 219   | COM6  |       |       |
| 60    | COM11  | 140   | SEG64  | 220   | COM8  |       |       |
| 61    | COM9   | 141   | SEG63  | 221   | COM10 |       |       |
| 62    | COM7   | 142   | SEG62  | 222   | COM12 |       |       |
| 63    | COM5   | 143   | SEG61  | 223   | COM14 |       |       |
| 64    | COM3   | 144   | SEG60  | 224   | COM16 |       |       |
| 65    | COM1   | 145   | SEG59  | 225   | COM18 |       |       |
| 66    | NC     | 146   | SEG58  | 226   | COM20 |       |       |
| 67    | NC     | 147   | SEG57  | 227   | COM22 |       |       |
| 68    | NC     | 148   | SEG56  | 228   | COM24 |       |       |
| 69    | NC     | 149   | SEG55  | 229   | COM26 |       |       |
| 70    | NC     | 150   | SEG54  | 230   | COM28 |       |       |
| 71    | NC     | 151   | SEG53  | 231   | COM30 |       |       |
| 72    | NC     | 152   | SEG52  | 232   | COM32 |       |       |
| 73    | SEG131 | 153   | SEG51  | 233   | COM34 |       |       |
| 74    | SEG130 | 154   | SEG50  | 234   | COM36 |       |       |
| 75    | SEG129 | 155   | SEG49  | 235   | COM38 |       |       |
| 76    | SEG128 | 156   | SEG48  | 236   | COM40 |       |       |
| 77    | SEG127 | 157   | SEG47  | 237   | COM42 |       |       |
| 78    | SEG126 | 158   | SEG46  | 238   | COM44 |       |       |
| 79    | SEG125 | 159   | SEG45  | 239   | COM46 |       |       |
| 80    | SEG124 | 160   | SEG44  | 240   | COM48 |       |       |

## 7 PIN DESCRIPTION

**Key:** I = Input, O =Output, IO = Bi-directional (input/output), P = Power pin

**Table 7-1 : Pin Description**

| Pin Name          | Pin Type | Description   |
|-------------------|----------|---|
| V <sub>DD</sub>   | P        | Power supply pin for core logic operation.  |
| V <sub>DDIO</sub> | P        | Power supply for interface logic level. It should be match with MCU interface voltage level. V <sub>DDIO</sub> must always be equal or lower than V <sub>DD</sub> .   |
| V <sub>CC</sub>   | P        | Power supply for panel driving voltage. This is also the most positive power voltage supply pin.  |
| V <sub>SS</sub>   | P        | This is a ground pin.   |
| V <sub>LSS</sub>  | P        | This is an analog ground pin. It should be connected to V <sub>SS</sub> externally.   |
| V <sub>COMH</sub> | O        | The pin for COM signal deselected voltage level.<br>A capacitor should be connected between this pin and V <sub>SS</sub> .  |
| BGGND             | P        | This pin must be connected to ground.   |
| V <sub>DDB</sub>  | P        | This is a reserved pin. It must be connected to V <sub>DD</sub> .   |
| V <sub>SSB</sub>  | P        | This is a reserved pin. It must be connected to V <sub>SS</sub> .   |
| GDR               | O        | This is a reserved pin. It should be kept NC (i.e. Float during normal operation).  |
| FB                | I        | This is a reserved pin. It should be kept NC (i.e. Float during normal operation).  |
| V <sub>BREF</sub> | P        | This is a reserved pin. It should be kept NC (i.e. Float during normal operation).  |
| V <sub>CIR</sub>  | O        | This is a reserved pin. It should be kept NC (i.e. Float during normal operation).  |
| BS[2:0]           | I        | MCU bus interface selection pins. Please refer to Table 7-2 for the details of setting.   |
| I <sub>REF</sub>  | I        | This is segment output current reference pin.<br>A resistor should be connected between this pin and V <sub>SS</sub> to maintain the I <sub>REF</sub> current at 10uA. Please refer to Figure 8-18 for the details of resistor value.                                 |
| FR                | O        | This pin outputs RAM write synchronization signal. Proper timing between MCU data writing and frame display timing can be achieved to prevent tearing effect.<br>It should be kept NC if it is not used. Please refer to Section 8.4 for details usage.               |
| CL                | I        | This is external clock input pin.<br>When internal clock is enabled (i.e. HIGH in CLS pin), this pin is not used and should be connected to V <sub>SS</sub> . When internal clock is disabled (i.e. LOW in CLS pin), this pin is the external clock source input pin. |
| CLS               | I        | This is internal clock enable pin. When it is pulled HIGH (i.e. connect to V <sub>DDIO</sub> ), internal clock is enabled. When it is pulled LOW, the internal clock is disabled; an external clock source must be connected to the CL pin for normal operation.      |
| RES#              | I        | This pin is reset signal input. When the pin is LOW, initialization of the chip is executed. Keep this pin HIGH (i.e. connect to V <sub>DDIO</sub> ) during normal operation.   |

| Pin Name      | Pin Type | Description  |
|---------------|----------|--|
| CS#           | I        | This pin is the chip select input. (active LOW)  |
| D/C#          | I        | This is Data/Command control pin. When it is pulled HIGH (i.e. connect to V <sub>DDIO</sub> ), the data at D[7:0] is treated as data. When it is pulled LOW, the data at D[7:0] will be transferred to the command register.<br>In I <sup>2</sup> C mode, this pin acts as SA0 for slave address selection.<br>For detail relationship to MCU interface signals, please refer to the Timing Characteristics Diagrams: Figure 13-1 to Figure 13-5.  |
| E (RD#)       | I        | When interfacing to a 6800-series microprocessor, this pin will be used as the Enable (E) signal. Read/write operation is initiated when this pin is pulled HIGH (i.e. connect to V <sub>DDIO</sub> ) and the chip is selected.<br>When connecting to an 8080-microprocessor, this pin receives the Read (RD#) signal. Read operation is initiated when this pin is pulled LOW and the chip is selected.<br>When serial interface is selected, this pin must be connected to V <sub>SS</sub> .   |
| R/W#(WR#)     | I        | This is read / write control input pin connecting to the MCU interface.<br>When interfacing to a 6800-series microprocessor, this pin will be used as Read/Write (R/W#) selection input. Read mode will be carried out when this pin is pulled HIGH (i.e. connect to V <sub>DDIO</sub> ) and write mode when LOW.<br>When 8080 interface mode is selected, this pin will be the Write (WR#) input. Data write operation is initiated when this pin is pulled LOW and the chip is selected.<br>When serial interface is selected, this pin must be connected to V <sub>SS</sub> . |
| D[7:0]        | IO       | These are 8-bit bi-directional data bus to be connected to the microprocessor's data bus. When serial interface mode is selected, D0 will be the serial clock input: SCLK; D1 will be the serial data input: SDIN and D2 should be left opened.<br>When I <sup>2</sup> C mode is selected, D2, D1 should be tied together and serve as SDA <sub>out</sub> , SDA <sub>in</sub> in application and D0 is the serial clock input, SCL.  |
| TR0-TR11      | -        | Testing reserved pins. It should be kept NC.   |
| SEG0 ~ SEG131 | O        | These pins provide Segment switch signals to OLED panel. They are in high impedance stage when display is OFF.   |
| COM0 ~ COM63  | O        | These pins provide Common switch signals to OLED panel. They are in high impedance state when display is OFF.  |
| NC            | -        | This is dummy pin. Do not group or short NC pins together.   |

**Table 7-2 : MCU Bus Interface Pin Selection**

| Pin Name | I <sup>2</sup> C Interface | 6800-parallel interface (8 bit) | 8080-parallel interface (8 bit) | Serial interface |
|----------|----------------------------|---------------------------------|---------------------------------|------------------|
| BS0      | 0                          | 0                               | 0                               | 0                |
| BS1      | 1                          | 0                               | 1                               | 0                |
| BS2      | 0                          | 1                               | 1                               | 0                |

**Note**

<sup>(1)</sup> 0 is connected to V<sub>SS</sub>

<sup>(2)</sup> 1 is connected to V<sub>DDIO</sub>

## 8 FUNCTIONAL BLOCK DESCRIPTIONS

### 8.1 MCU Interface selection

SSD1305 MCU interface consist of 8 data pins and 5 control pins. The pin assignment at different interface mode is summarized in Table 8-1. Different MCU mode can be set by hardware selection on BS[2:0] pins (please refer to Table 7-2 for BS[2:0] setting).

**Table 8-1 : MCU interface assignment under different bus interface mode**

| Pin Name<br>Bus Interface | Data/Command Interface |    |    |    |    |                    |                   |      | Control Signal |      |     |      |      |
|---------------------------|------------------------|----|----|----|----|--------------------|-------------------|------|----------------|------|-----|------|------|
|                           | D7                     | D6 | D5 | D4 | D3 | D2                 | D1                | D0   | E              | R/W# | CS# | D/C# | RES# |
| 8-bit 8080                | D[7:0]                 |    |    |    |    |                    |                   |      | RD#            | WR#  | CS# | D/C# | RES# |
| 8-bit 6800                | D[7:0]                 |    |    |    |    |                    |                   |      | E              | R/W# | CS# | D/C# | RES# |
| SPI                       | Tie LOW                |    |    |    |    | NC                 | SDIN              | SCLK | Tie LOW        |      | CS# | D/C# | RES# |
| I <sup>2</sup> C          | Tie LOW                |    |    |    |    | SDA <sub>OUT</sub> | SDA <sub>IN</sub> | SCL  | Tie LOW        |      |     | SA0  | RES# |

#### 8.1.1 MCU Parallel 6800-series Interface

The parallel interface consists of 8 bi-directional data pins (D[7:0]), R/W#, D/C#, E and CS#.

A LOW in R/W# indicates WRITE operation and HIGH in R/W# indicates READ operation.

A LOW in D/C# indicates COMMAND read/write and HIGH in D/C# indicates DATA read/write.

The E input serves as data latch signal while CS# is LOW. Data is latched at the falling edge of E signal.

**Table 8-2 : Control pins of 6800 interface**

| Function      | E | R/W# | CS# | D/C# |
|---------------|---|------|-----|------|
| Write command | ↓ | L    | L   | L    |
| Read status   | ↓ | H    | L   | L    |
| Write data    | ↓ | L    | L   | H    |
| Read data     | ↓ | H    | L   | H    |

#### Note


<sup>(1)</sup> ↓ stands for falling edge of signal

H stands for HIGH in signal

L stands for LOW in signal

In order to match the operating frequency of display RAM with that of the microprocessor, some pipeline processing is internally performed which requires the insertion of a dummy read before the first actual display data read. This is shown in Figure 8-1.

**Figure 8-1 : Data read back procedure - insertion of dummy read**

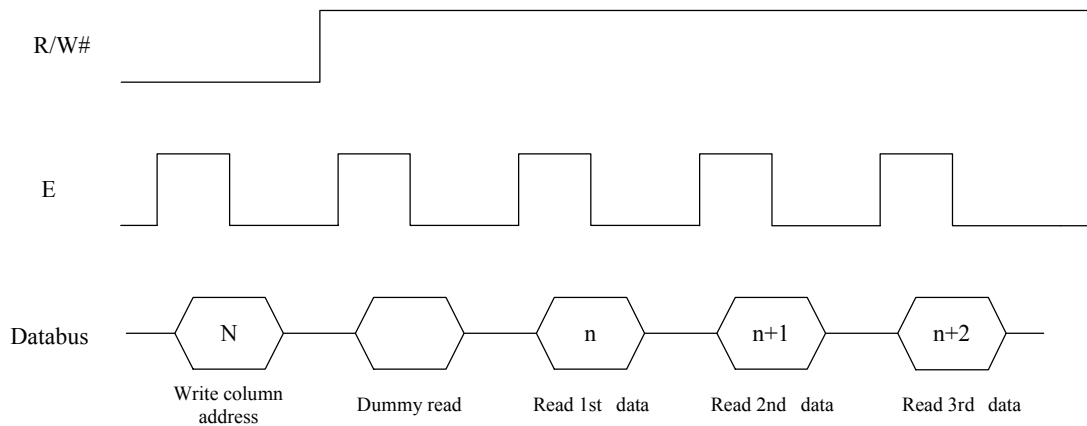

### 8.1.2 MCU Parallel 8080-series Interface


The parallel interface consists of 8 bi-directional data pins (D[7:0]), RD#, WR#, D/C# and CS#.

A LOW in D/C# indicates COMMAND read/write and HIGH in D/C# indicates DATA read/write.


A rising edge of RD# input serves as a data READ latch signal while CS# is kept LOW.

A rising edge of WR# input serves as a data/command WRITE latch signal while CS# is kept LOW.

**Figure 8-2 : Example of Write procedure in 8080 parallel interface mode**

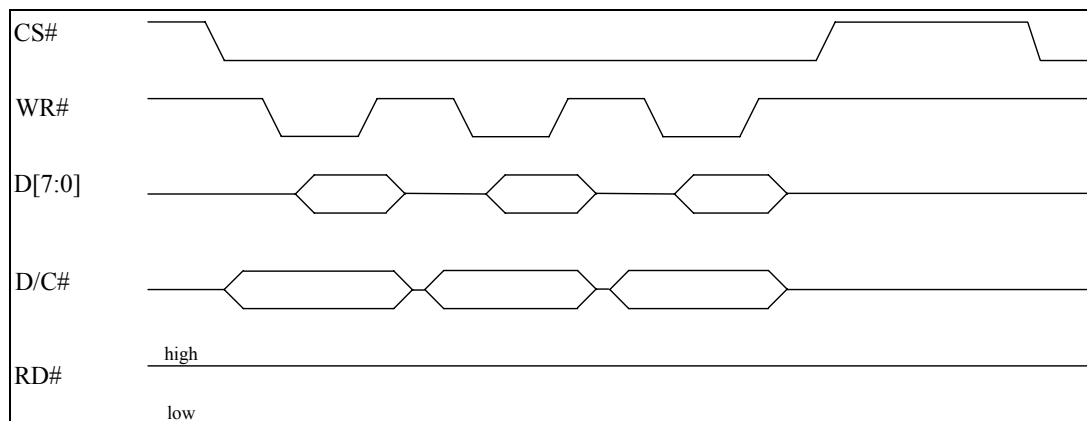

**Figure 8-3 : Example of Read procedure in 8080 parallel interface mode**

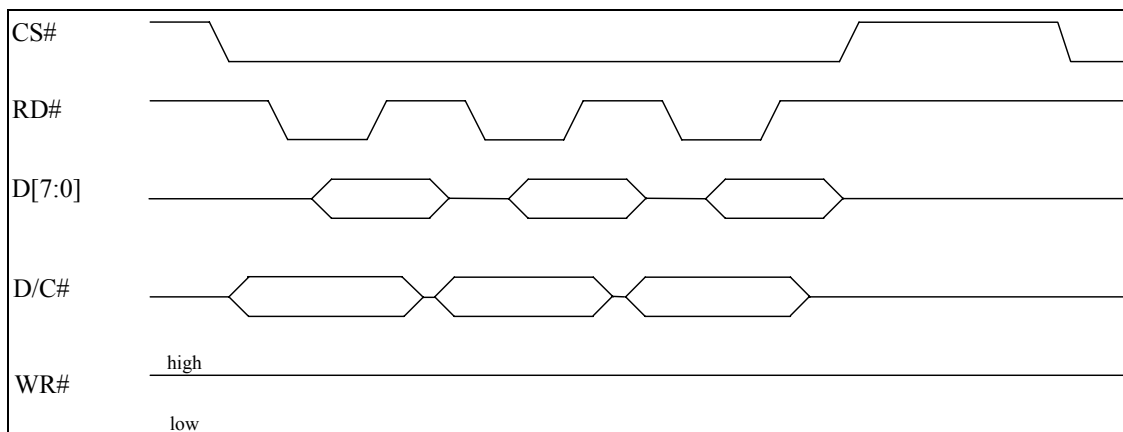

**Table 8-3 : Control pins of 8080 interface (Form 1)**

| Function      | RD# | WR# | CS# | D/C# |
|---------------|-----|-----|-----|------|
| Write command | H   | ↑   | L   | L    |
| Read status   | ↑   | H   | L   | L    |
| Write data    | H   | ↑   | L   | H    |
| Read data     | ↑   | H   | L   | H    |

**Note**

- (1) ↑ stands for rising edge of signal  
(2) H stands for HIGH in signal  
(3) L stands for LOW in signal  
(4) Refer to Figure 13-2 for Form 1 8080-Series MPU Parallel Interface Timing Characteristics

Alternatively, RD# and WR# can be keep stable while CS# serves as the data/command latch signal.

**Table 8-4 : Control pins of 8080 interface (Form 2)**


| Function      | RD# | WR# | CS# | D/C# |
|---------------|-----|-----|-----|------|
| Write command | H   | L   | ↑   | L    |
| Read status   | L   | H   | ↑   | L    |
| Write data    | H   | L   | ↑   | H    |
| Read data     | L   | H   | ↑   | H    |

**Note**

- (1) ↑ stands for rising edge of signal  
(2) H stands for HIGH in signal  
(3) L stands for LOW in signal  
(4) Refer to Figure 13-3 for Form 2 8080-Series MPU Parallel Interface Timing Characteristics

In order to match the operating frequency of display RAM with that of the microprocessor, some pipeline processing is internally performed which requires the insertion of a dummy read before the first actual display data read. This is shown in Figure 8-4.

**Figure 8-4 : Display data read back procedure - insertion of dummy read**

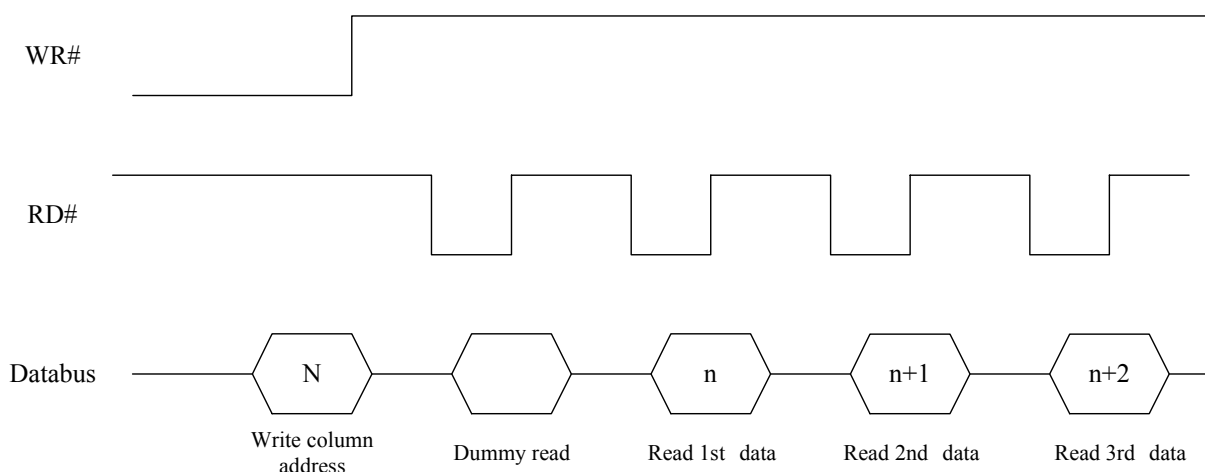



### 8.1.3 MCU Serial Interface

The serial interface consists of serial clock SCLK, serial data SDIN, D/C#, CS#. In SPI mode, D0 acts as SCLK, D1 acts as SDIN. For the unused data pins, D2 should be left open. The pins from D3 to D7, E and R/W# can be connected to an external ground.


**Table 8-5 : Control pins of Serial interface**

| Function      | E(RD#)  | R/W#(WR#) | CS# | D/C# | D0 | Note                                   |
|---------------|---------|-----------|-----|------|----|--|
| Write command | Tie LOW | Tie LOW   | L   | L    | ↑  | (1) ↑ stands for rising edge of signal |
| Write data    | Tie LOW | Tie LOW   | L   | H    | ↑  | (2) H stands for HIGH in signal        |
|               |         |           |     |      |    | (3) L stands for LOW in signal         |

SDIN is shifted into an 8-bit shift register on every rising edge of SCLK in the order of D7, D6, ... D0. D/C# is sampled on every eighth clock and the data byte in the shift register is written to the Graphic Display Data RAM (GDDRAM) or command register in the same clock.

Under serial mode, only write operations are allowed.

**Figure 8-5 : Write procedure in SPI mode**

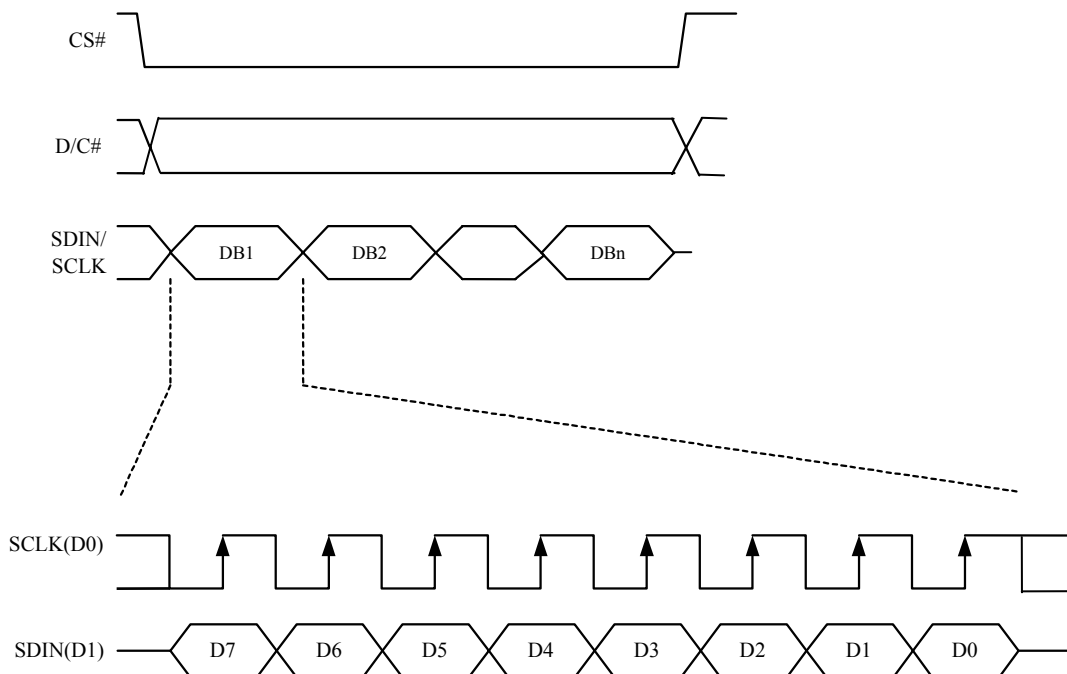

### 8.1.4 MCU I<sup>2</sup>C Interface

The I<sup>2</sup>C communication interface consists of slave address bit SA0, I<sup>2</sup>C-bus data signal SDA (SDA<sub>OUT</sub>/D<sub>2</sub> for output and SDA<sub>IN</sub>/D<sub>1</sub> for input) and I<sup>2</sup>C-bus clock signal SCL (D<sub>0</sub>). Both the data and clock signals must be connected to pull-up resistors. RES# is used for the initialization of device.

#### a) Slave address bit (SA0)

SSD1305 has to recognize the slave address before transmitting or receiving any information by the I<sup>2</sup>C-bus. The device will respond to the slave address following by the slave address bit ("SA0" bit) and the read/write select bit ("R/W#" bit) with the following byte format,

b<sub>7</sub> b<sub>6</sub> b<sub>5</sub> b<sub>4</sub> b<sub>3</sub> b<sub>2</sub> b<sub>1</sub> b<sub>0</sub>  
 0 1 1 1 1 0 SA0 R/W#

"SA0" bit provides an extension bit for the slave address. Either "0111100" or "0111101", can be selected as the slave address of SSD1305. D/C# pin acts as SA0 for slave address selection.

"R/W#" bit is used to determine the operation mode of the I<sup>2</sup>C-bus interface. R/W#=1, it is in read mode. R/W#=0, it is in write mode.

b) I<sup>2</sup>C-bus data signal (SDA)

SDA acts as a communication channel between the transmitter and the receiver. The data and the acknowledgement are sent through the SDA.

It should be noticed that the ITO track resistance and the pulled-up resistance at “SDA” pin becomes a voltage potential divider. As a result, the acknowledgement would not be possible to attain a valid logic 0 level in “SDA”.

“SDA<sub>IN</sub>” and “SDA<sub>OUT</sub>” are tied together and serve as SDA. The “SDA<sub>IN</sub>” pin must be connected to act as SDA. The “SDA<sub>OUT</sub>” pin may be disconnected. When “SDA<sub>OUT</sub>” pin is disconnected, the acknowledgement signal will be ignored in the I<sup>2</sup>C-bus.


c) I<sup>2</sup>C-bus clock signal (SCL)

The transmission of information in the I<sup>2</sup>C-bus is following a clock signal, SCL. Each transmission of data bit is taken place during a single clock period of SCL.

### 8.1.4.1 I<sup>2</sup>C-bus Write data

The I<sup>2</sup>C-bus interface gives access to write data and command into the device. Please refer to Figure 8-6 for the write mode of I<sup>2</sup>C-bus in chronological order.


**Figure 8-6 : I<sup>2</sup>C -bus data format**

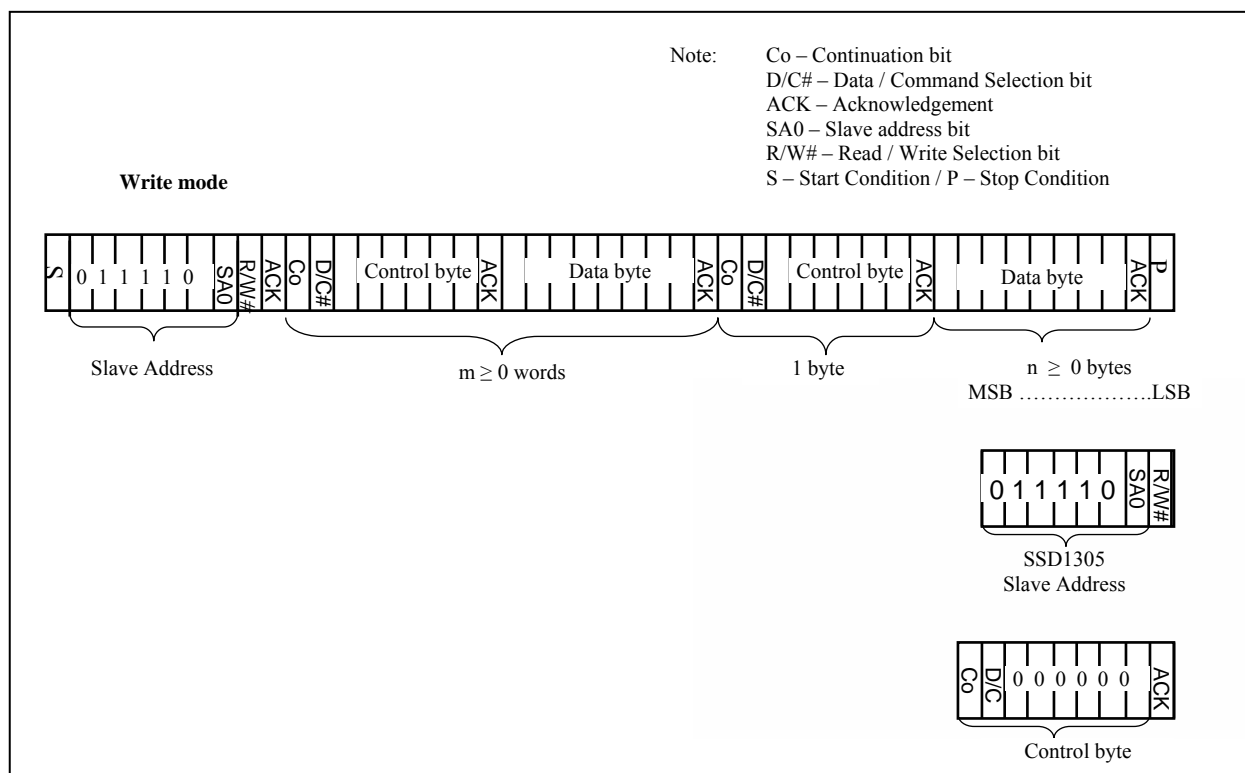


#### 8.1.4.2 Write mode for I<sup>2</sup>C

- 1) The master device initiates the data communication by a start condition. The definition of the start condition is shown in Figure 8-7. The start condition is established by pulling the SDA from HIGH to LOW while the SCL stays HIGH.
- 2) The slave address is following the start condition for recognition use. For the SSD1305, the slave address is either “b0111100” or “b0111101” by changing the SA0 to LOW or HIGH (D/C pin acts as SA0).
- 3) The write mode is established by setting the R/W# bit to logic “0”.
- 4) An acknowledgement signal will be generated after receiving one byte of data, including the slave address and the R/W# bit. Please refer to the Figure 8-8 for the graphical representation of the acknowledge signal. The acknowledge bit is defined as the SDA line is pulled down during the HIGH period of the acknowledgement related clock pulse.
- 5) After the transmission of the slave address, either the control byte or the data byte may be sent across the SDA. A control byte mainly consists of Co and D/C# bits following by six “0” ‘s.
  - a. If the Co bit is set as logic “0”, the transmission of the following information will contain data bytes only.
  - b. The D/C# bit determines the next data byte is acted as a command or a data. If the D/C# bit is set to logic “0”, it defines the following data byte as a command. If the D/C# bit is set to logic “1”, it defines the following data byte as a data which will be stored at the GDDRAM. The GDDRAM column address pointer will be increased by one automatically after each data write.
- 6) Acknowledge bit will be generated after receiving each control byte or data byte.
- 7) The write mode will be finished when a stop condition is applied. The stop condition is also defined in Figure 8-7. The stop condition is established by pulling the “SDA in” from LOW to HIGH while the “SCL” stays HIGH.

**Figure 8-7 : Definition of the Start and Stop Condition**

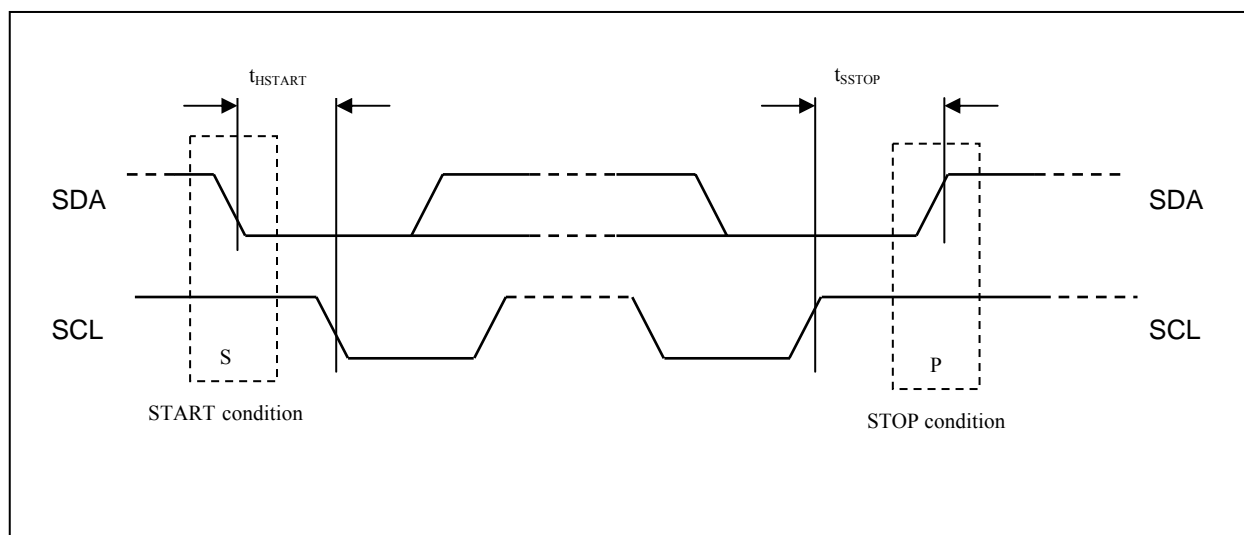


**Figure 8-8 : Definition of the acknowledgement condition**

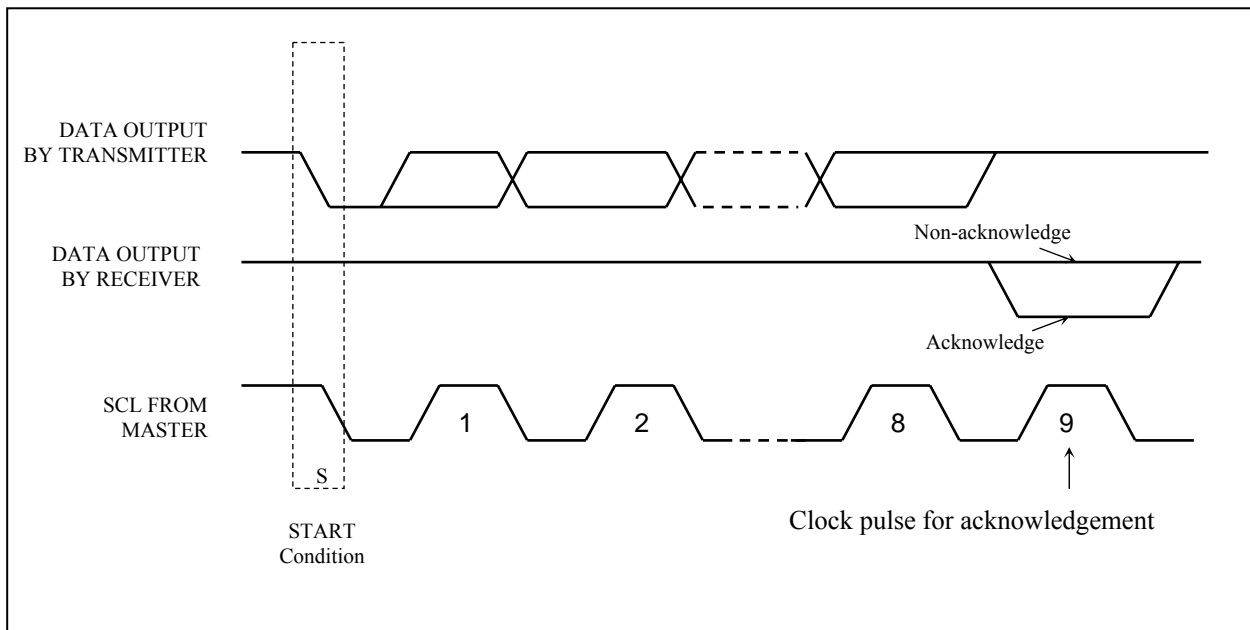

Please be noted that the transmission of the data bit has some limitations.

1. The data bit, which is transmitted during each SCL pulse, must keep at a stable state within the “HIGH” period of the clock pulse. Please refer to the Figure 8-9 for graphical representations. Except in start or stop conditions, the data line can be switched only when the SCL is LOW.
2. Both the data line (SDA) and the clock line (SCL) should be pulled up by external resistors.

**Figure 8-9 : Definition of the data transfer condition**

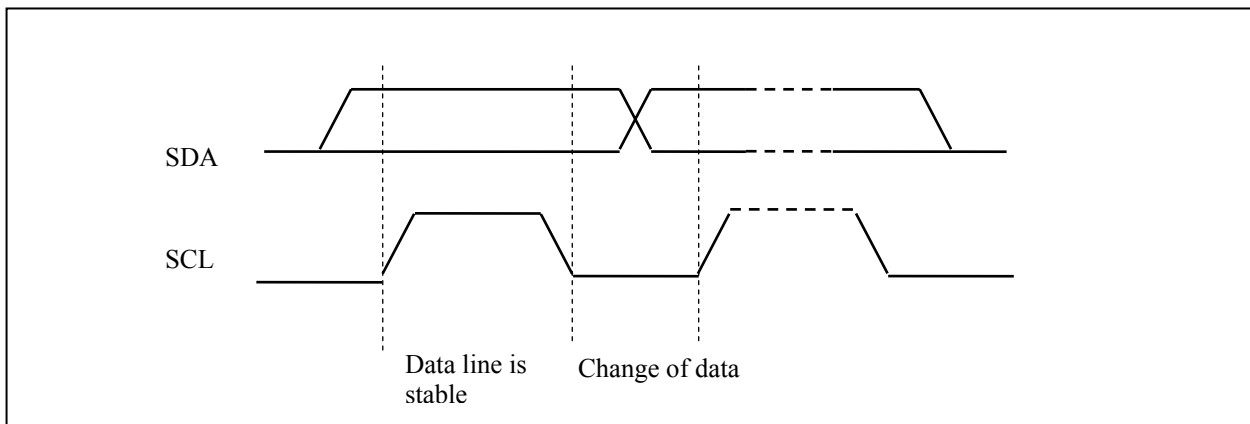


## 8.2 Command Decoder

This module determines whether the input data is interpreted as data or command. Data is interpreted based upon the input of the D/C# pin.

If D/C# pin is HIGH, D[7:0] is interpreted as display data written to Graphic Display Data RAM (GDDRAM). If it is LOW, the input at D[7:0] is interpreted as a command. Then data input will be decoded and written to the corresponding command register.

### 8.3 Oscillator Circuit and Display Time Generator

Figure 8-10 : Oscillator Circuit and Display Time Generator

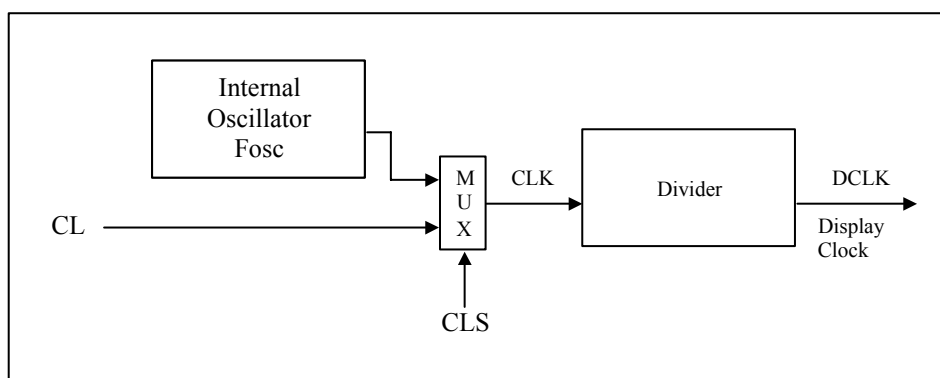

This module is an on-chip LOW power RC oscillator circuitry. The operation clock (CLK) can be generated either from internal oscillator or external source CL pin. This selection is done by CLS pin. If CLS pin is pulled HIGH, internal oscillator is chosen and CL should be connected to V<sub>SS</sub>. Pulling CLS pin LOW disables internal oscillator and external clock must be connected to CL pins for proper operation. When the internal oscillator is selected, its output frequency F<sub>osc</sub> can be changed by command D5h A[7:4].

The display clock (DCLK) for the Display Timing Generator is derived from CLK. The division factor “D” can be programmed from 1 to 16 by command D5h

$$DCLK = F_{OSC} / D$$

The frame frequency of display is determined by the following formula.


$$F_{FRM} = \frac{F_{osc}}{D \times K \times \text{No. of Mux}}$$

where

- D stands for clock divide ratio. It is set by command D5h A[3:0]. The divide ratio has the range from 1 to 16.
- K is the number of display clocks per row. The value is derived by  
 $K = \text{Phase 1 period} + \text{Phase 2 period} + \text{BANK0 pulse width}$   
 $= 2 + 2 + 50 = 54$  at power on reset  
 (Please refer to Section 8.6 “Segment Drivers / Common Drivers” for the details of the “Phase”)
- Number of multiplex ratio is set by command A8h. The power on reset value is 63 (i.e. 64MUX).
- F<sub>OSC</sub> is the oscillator frequency. It can be changed by command D5h A[7:4]. The higher the register setting results in higher frequency.

## 8.4 FR synchronization

FR synchronization signal can be used to prevent tearing effect.

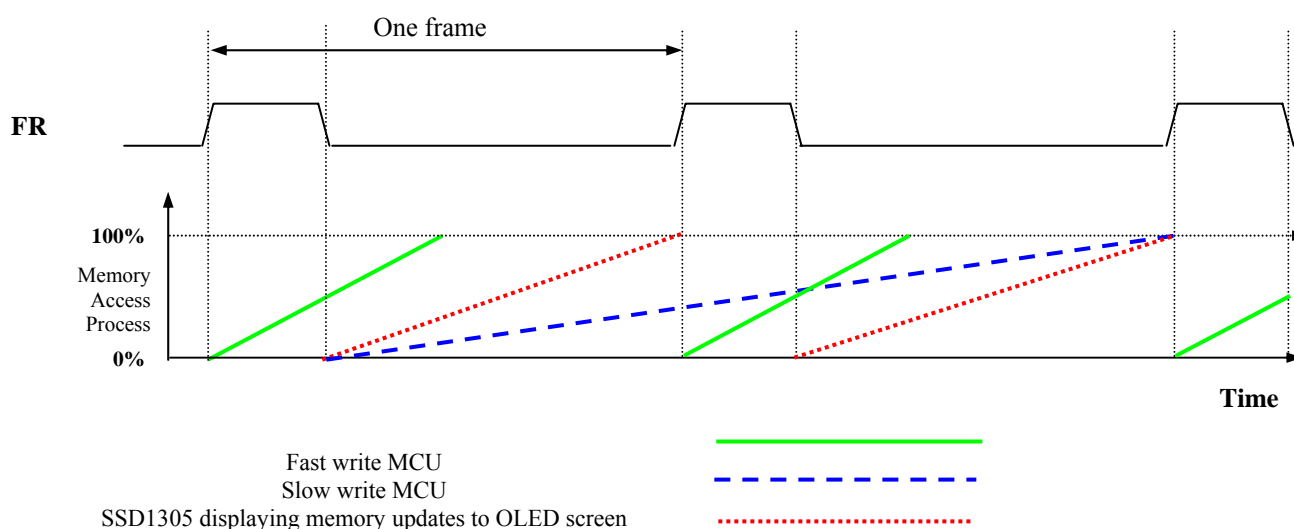

The starting time to write a new image to OLED driver is depended on the MCU writing speed. If MCU can finish writing a frame image within one frame period, it is classified as fast write MCU. For MCU needs longer writing time to complete (more than one frame but within two frames), it is a slow write one.

**For fast write MCU:** MCU should start to write new frame of ram data just after rising edge of FR pulse and should be finished well before the rising edge of the next FR pulse.

**For slow write MCU:** MCU should start to write new frame ram data after the falling edge of the 1<sup>st</sup> FR pulse and must be finished before the rising edge of the 3<sup>rd</sup> FR pulse.

## 8.5 Reset Circuit

When RES# input is LOW, the chip is initialized with the following status:

1. Display is OFF
2. 132 x 64 Display Mode
3. Normal segment and display data column address and row address mapping (SEG0 mapped to address 00h and COM0 mapped to address 00h)
4. Shift register data clear in serial interface
5. Display start line is set at display RAM address 0
6. Column address counter is set at 0
7. Normal scan direction of the COM outputs
8. Contrast control register is set at 80h
9. Normal display mode (Equivalent to A4h command)


## 8.6 Segment Drivers / Common Drivers

Segment drivers deliver 132 current sources to drive the OLED panel. The driving current can be adjusted from 0 to 320uA with 256 steps. Common drivers generate voltage-scanning pulses.

The segment driving waveform is divided into three phases:

1. In phase 1, the OLED pixel charges of previous image are discharged in order to prepare for next image content display.
2. In phase 2, the OLED pixel is driven to the targeted voltage. The pixel is driven to attain the corresponding voltage level from  $V_{SS}$ . The period of phase 2 can be programmed in length from 1 to 15 DCLKs. If the capacitance value of the pixel of OLED panel is larger, a longer period is required to charge up the capacitor to reach the desired voltage.
3. In phase 3, the OLED driver switches to use current source to drive the OLED pixels and this is the current drive stage. SSD1305 employs PWM (Pulse Width Modulation) method to control the brightness of area color A, B, C, D color individually. The longer the waveform in current drive stage is, the brighter is the pixel and vice versa.

**Figure 8-11 : Segment Output Waveform in three phases**

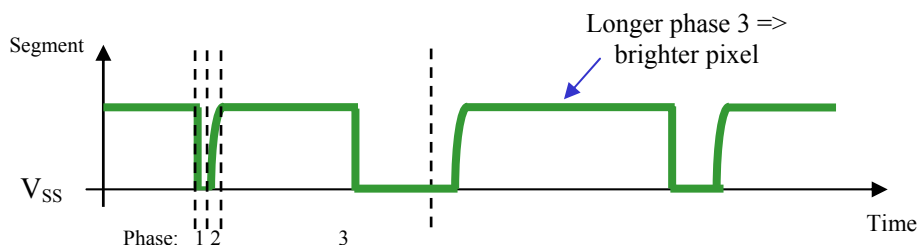


After finishing phase 3, the driver IC will go back to phase 1 to display the next row image data. This three-step cycle is run continuously to refresh image display on OLED panel.

The length of phase 3 for area colors: A,B,C and monochrome BANK0 can be configured by command 91h "Set Look Up Table". There are 64 steps available for each color but the one of color D is fixed at 64. The unit of the step is in DCLK.

For example, the look up table for area color A, B, is set to 20, 40 DCLKs respectively. Color B is set to be brighter than color A. Then the result segment output waveform of these two colors is shown below.


**Figure 8-12 : Segment Output Waveform for two different colors LUT setting**

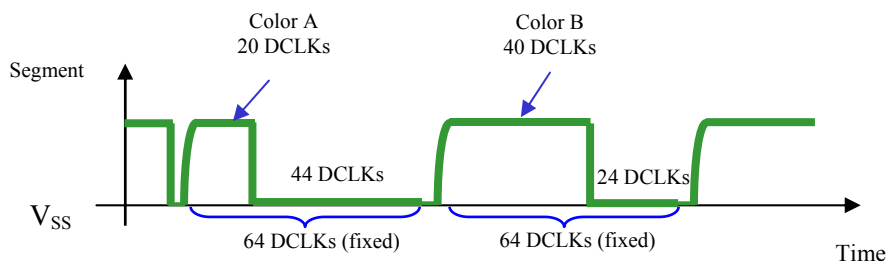

In phase 3, the segment output waveforms under the monochrome mode and area color mode are different.


In monochrome mode, if the length of current drive pulse width is set to 50, after finishing 50 DCLKs in current drive phase, the driver IC will go back to phase 1 for next row display.

**Figure 8-13 : Example of Segment Output Waveform of monochrome display section under monochrome mode**

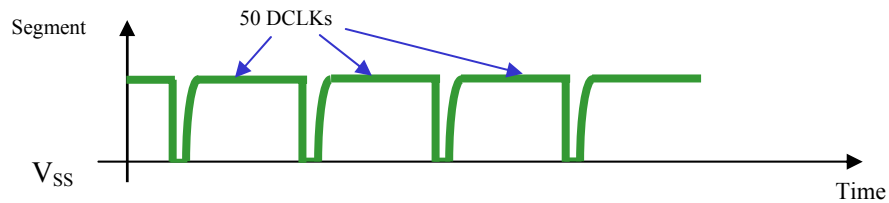

In area color mode, the phase 3 of both BANK0 and area color banks (BANK1 to BANK32) are fixed into 64 DCLKs. For instance, if the length of the pulse width is set to 50, then after the end of 50 DCLKs of current drive phase, the segment waveform will be gone to V<sub>SS</sub> level and the driver is still in current drive phase. This phase will be end after 64 DCLKs from the start of the phase is passed. And then the drive goes back to phase 1 for next row display. Figure 8-14 shows the example of the segment output waveform of area color display section when the pulse width of area color is set to 50.

**Figure 8-14 : Example of Segment Output Waveform of area color display section under area color mode**

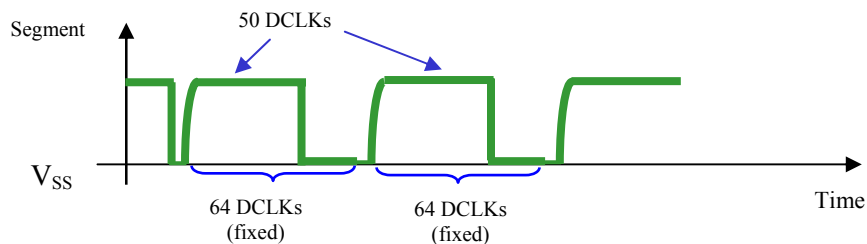



The GDDRAM is a bit mapped static RAM holding the bit pattern to be displayed. The size of the RAM is 132 x 64 bits and the RAM is divided into eight pages, from PAGE0 to PAGE7, as shown in Figure 8-15. In GDDRAM, PAGE0 and PAGE1 are belonged to area color section with resolution 132x16. PAGE2 to PAGE7 are used for monochrome 132x48 dot matrix display.

Diagram illustrating two parallel paths of dashed lines connecting boxes labeled "PAGE0, BANK1" to "PAGE0, BANK16" and "PAGE1, BANK17" to "PAGE1, BANK32". A diagonal line separates the two paths.

Diagram illustrating the column re-mapping for Bank0 (Background) across 8 pages (PAGE0 to PAGE7). The diagram shows a grid of 16 columns and 8 rows. The top two rows (PAGE0 and PAGE1) are red, and the bottom six rows (PAGE2 to PAGE7) are yellow. The columns are labeled with COM addresses on both sides. The bottom of the diagram shows the segment mapping: SEG0 (left) and SEG131 (right), with a green dashed line indicating the column re-mapping.


| Page  | COM Address Range (Left) | COM Address Range (Right) |
|-------|--------------------------|---------------------------|
| PAGE0 | COM 63-COM56             | COM0-COM7                 |
| PAGE1 | COM 55-COM48             | COM8-COM15                |
| PAGE2 | COM47-COM40              | COM16-COM23               |
| PAGE3 | COM39-COM32              | COM24-COM31               |
| PAGE4 | COM31-COM24              | COM32-COM39               |
| PAGE5 | COM23-COM16              | COM40-COM47               |
| PAGE6 | COM15-COM8               | COM48-COM55               |
| PAGE7 | COM 7-COM0               | COM56-COM63               |

Bank0 (Background)  
PAGE2 - PAGE7

SEG0 ----- SEG131

Column re-mapping SEG131 ----- SEG0

**Figure 8-16 : Enlargement of GDDRAM (No row re-mapping and column-remapping)**

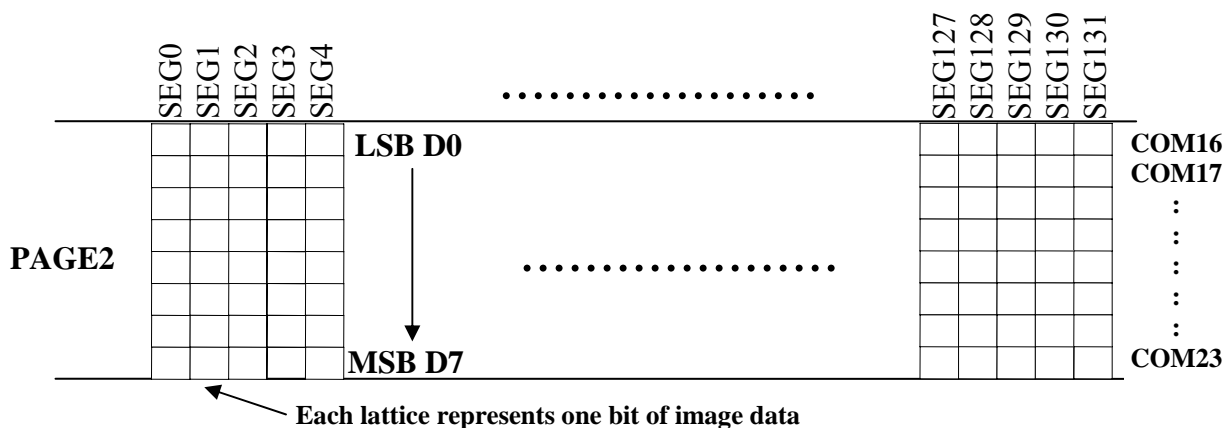


For mechanical flexibility, re-mapping on both Segment and Common outputs can be selected by software as shown in Figure 8-15.

For vertical shifting of the display, an internal register storing the display start line can be set to control the portion of the RAM data to be mapped to the display (command D3h).

## 8.8 Area Color Decoder

The 132x64 display matrix is divided into 8 pages. The first two pages, PAGE0 and PAGE1, are divided into 32 banks. BANK16 and BANK32 consist of a display area of 12x8 pixels. Other banks (BANK0 to BANK15 & BANK17 to BANK31) have matrices of 8x8 pixels. Each bank can be programmed to any one of the four colors (color A, B, C and D) as the example shown in Figure 8-17. Detailed operation can be referred to command 92h in Table 9-1.

**Figure 8-17 : Example of area color assignment on a 132x64 OLED panel**

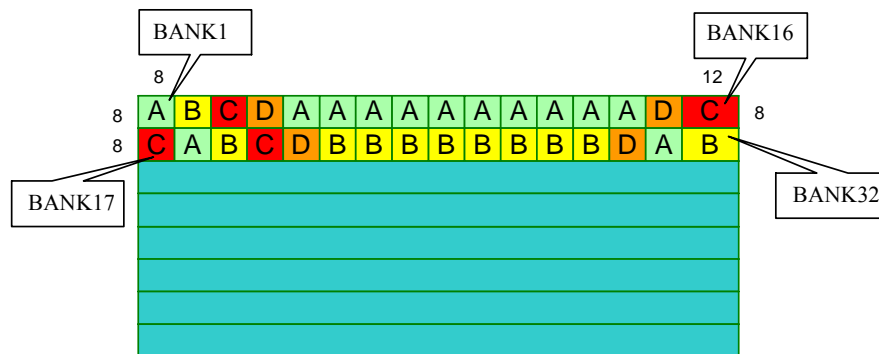

## 8.9 SEG/COM Driving block

This block is used to derive the incoming power sources into the different levels of internal use voltage and current.

- $V_{CC}$  is the most positive voltage supply.
- $V_{COMH}$  is the Common deselected level. It is internally regulated.
- $V_{LSS}$  is the ground path of the analog and panel current.
- $I_{REF}$  is a reference current source for segment current drivers  $I_{SEG}$ . The relationship between reference current and segment current of a color is:


$$I_{SEG} = \text{Contrast} / 256 \times I_{REF} \times \text{scale factor}$$

in which

the contrast (0~255) is set by Set Contrast command 81h; and  
the scale factor is 32 by default.

The magnitude of  $I_{REF}$  is controlled by the value of resistor, which is connected between  $I_{REF}$  pin and  $V_{SS}$  as shown in Figure 8-18. It is recommended to set  $I_{REF}$  to 10uA+/- 2uA so as to achieve  $I_{SEG} = 320\mu\text{A}$  at maximum contrast 255.

**Figure 8-18 :  $I_{REF}$  Current Setting by Resistor Value**

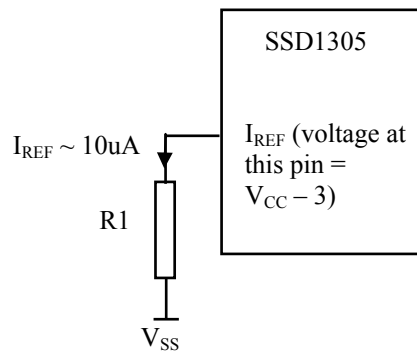

Since the voltage at  $I_{REF}$  pin is  $V_{CC} - 3\text{V}$ , the value of resistor  $R1$  can be found as below.

$$R1 = (\text{Voltage at } I_{REF} - V_{SS}) / I_{REF} = (V_{CC} - 3) / 10\mu\text{A} \approx 910\text{k}\Omega \text{ for } V_{CC} = 12\text{V}.$$


## 8.10 Power ON and OFF sequence

The following figures illustrate the recommended power ON and power OFF sequence of SSD1305 (assume  $V_{DD}$  and  $V_{DDIO}$  are at the same voltage level).

### Power ON sequence:

1. Power ON  $V_{DD}$ ,  $V_{DDIO}$ .
2. After  $V_{DD}$ ,  $V_{DDIO}$  become stable, set RES# pin LOW (logic low) for at least 3 $\mu$ s ( $t_1$ ) <sup>(4)</sup> and then HIGH (logic high).
3. After set RES# pin LOW (logic low), wait for at least 3 $\mu$ s ( $t_2$ ). Then Power ON  $V_{CC}$ . <sup>(1)</sup>
4. After  $V_{CC}$  become stable, send command AFh for display ON. SEG/COM will be ON after 100ms ( $t_{AF}$ ).


**Figure 8-19 : The Power ON sequence**

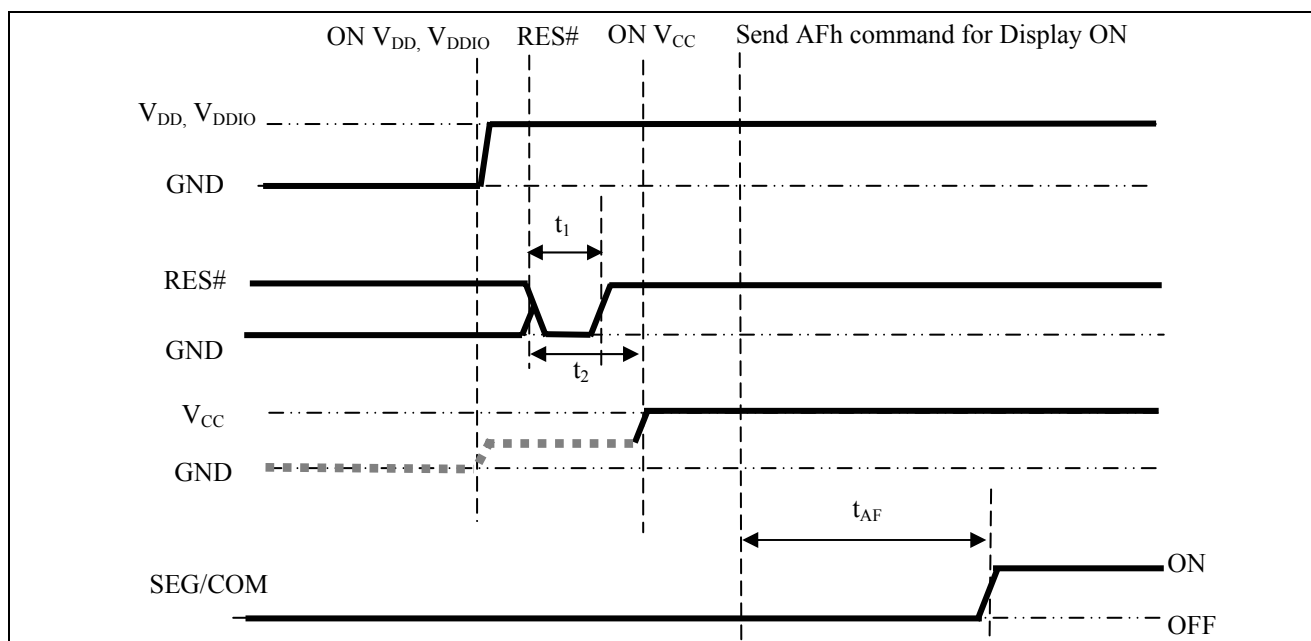

### Power OFF sequence:

1. Send command AEh for display OFF.
2. Power OFF  $V_{CC}$ . <sup>(1), (2), (3)</sup>
3. Wait for  $t_{OFF}$ . Power OFF  $V_{DD}$ ,  $V_{DDIO}$ . (where Minimum  $t_{OFF}=0$ ms <sup>(5)</sup>, Typical  $t_{OFF}=100$ ms)

**Figure 8-20 : The Power OFF sequence**

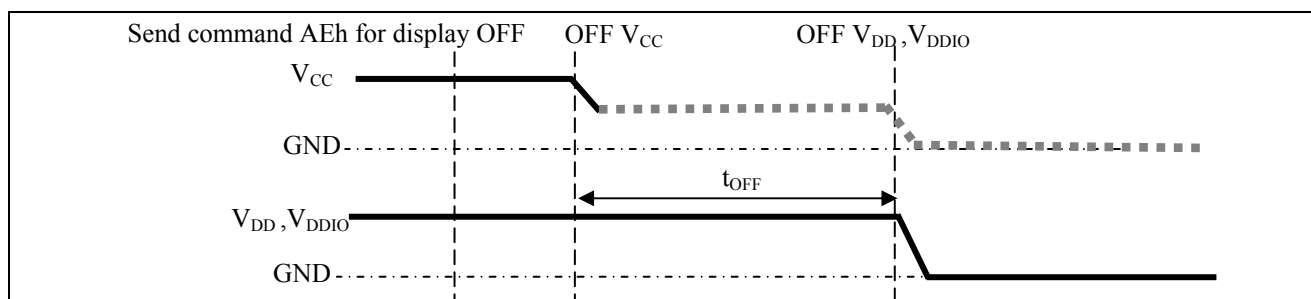

### Note:

- <sup>(1)</sup> Since an ESD protection circuit is connected between  $V_{DD}$ ,  $V_{DDIO}$  and  $V_{CC}$ ,  $V_{CC}$  becomes lower than  $V_{DD}$  whenever  $V_{DD}$ ,  $V_{DDIO}$  is ON and  $V_{CC}$  is OFF as shown in the dotted line of  $V_{CC}$  in Figure 8-19 and Figure 8-20.
- <sup>(2)</sup>  $V_{CC}$  should be kept float (disable) when it is OFF.
- <sup>(3)</sup> Power Pins ( $V_{DD}$ ,  $V_{CC}$ ) can never be pulled to ground under any circumstance.
- <sup>(4)</sup> The register values are reset after  $t_1$ .
- <sup>(5)</sup>  $V_{DD}$  should not be Power OFF before  $V_{CC}$  Power OFF.

## 9 COMMAND TABLE

**Table 9-1: Command Table**

(D/C#=0, R/W#(WR#) = 0, E(RD#=1) unless specific setting is stated)

| Fundamental Command Table |  |                                       |                                       |   |   |   |   |   |   |  |  |
|---------------------------|--|---------------------------------------|---------------------------------------|---|---|---|---|---|---|--|--|
| D/C#                      | Hex  | D7                                    | D6                                    | D5  | D4  | D3  | D2  | D1  | D0  | Command  | Description  |
| 0                         | 00~0F                                      | 0                                     | 0                                     | 0   | 0   | X <sub>3</sub>  | X <sub>2</sub>  | X <sub>1</sub>  | X <sub>0</sub>  | Set Lower Column Start Address for Page Addressing Mode  | Set the lower nibble of the column start address register for Page Addressing Mode using X[3:0] as data bits. The initial display line register is reset to 0000b after RESET.   |
| 0                         | 10~1F                                      | 0                                     | 0                                     | 0   | 1   | X <sub>3</sub>  | X <sub>2</sub>  | X <sub>1</sub>  | X <sub>0</sub>  | Set Higher Column Start Address for Page Addressing Mode | Set the higher nibble of the column start address register for Page Addressing Mode using X[3:0] as data bits. The initial display line register is reset to 0000b after RESET.  |
| 0<br>0                    | 20<br>A[1:0]                               | 0<br>*                                | 0<br>*                                | 1<br>*  | 0<br>*  | 0<br>*  | 0<br>*  | 0<br>A <sub>1</sub>   | 0<br>A <sub>0</sub>   | Set Memory Addressing Mode                               | A[1:0] = 00b, Horizontal Addressing Mode<br>A[1:0] = 01b, Vertical Addressing Mode<br>A[1:0] = 10b, Page Addressing Mode (RESET)<br>A[1:0] = 11b, Invalid  |
| 0<br>0<br>0               | 21<br>A[7:0]<br>B[7:0]                     | 0<br>A <sub>7</sub><br>B <sub>7</sub> | 0<br>A <sub>6</sub><br>B <sub>6</sub> | 1<br>A <sub>5</sub><br>B <sub>5</sub>                                     | 0<br>A <sub>4</sub><br>B <sub>4</sub>                                     | 0<br>A <sub>3</sub><br>B <sub>3</sub>                                     | 0<br>A <sub>2</sub><br>B <sub>2</sub>                                     | 0<br>A <sub>1</sub><br>B <sub>1</sub>                                     | 1<br>A <sub>0</sub><br>B <sub>0</sub>                                     | Set Column Address                                       | Setup column start and end address<br>A[7:0] : Column start address, range : 0-131d, (RESET=0d)<br><br>B[7:0]: Column end address, range : 0-131d, (RESET =131d)   |
| 0<br>0<br>0               | 22<br>A[2:0]<br>B[2:0]                     | 0<br>*<br>*                           | 0<br>*<br>*                           | 1<br>*<br>*   | 0<br>*<br>*   | 0<br>*<br>*   | 0<br>A <sub>2</sub><br>B <sub>2</sub>                                     | 1<br>A <sub>1</sub><br>B <sub>1</sub>                                     | 0<br>A <sub>0</sub><br>B <sub>0</sub>                                     | Set Page Address   | Setup page start and end address<br>A[2:0] : Page start Address, range : 0-7d, (RESET = 0d)<br>B[2:0] : Page end Address, range : 0-7d, (RESET = 7d)   |
| 0                         | 40~7F                                      | 0                                     | 1                                     | X <sub>5</sub>  | X <sub>4</sub>  | X <sub>3</sub>  | X <sub>2</sub>  | X <sub>1</sub>  | X <sub>0</sub>  | Set Display Start Line                                   | Set display RAM display start line register from 0-63 using X <sub>5</sub> X <sub>3</sub> X <sub>2</sub> X <sub>1</sub> X <sub>0</sub> .<br>Display start line register is reset to 000000b during RESET.  |
| 0<br>0                    | 81<br>A[7:0]                               | 1<br>A <sub>7</sub>                   | 0<br>A <sub>6</sub>                   | 0<br>A <sub>5</sub>   | 0<br>A <sub>4</sub>   | 0<br>A <sub>3</sub>   | 0<br>A <sub>2</sub>   | 0<br>A <sub>1</sub>   | 1<br>A <sub>0</sub>   | Set Contrast Control For BANK0                           | Double byte command to select 1 out of 256 contrast steps. Contrast increases as the value increases. (RESET = 80h)  |
| 0<br>0                    | 82<br>A[7:0]                               | 1<br>A <sub>7</sub>                   | 0<br>A <sub>6</sub>                   | 0<br>A <sub>5</sub>   | 0<br>A <sub>4</sub>   | 0<br>A <sub>3</sub>   | 0<br>A <sub>2</sub>   | 1<br>A <sub>1</sub>   | 0<br>A <sub>0</sub>   | Set Brightness For Area Color Banks                      | Double byte command to select 1 out of 256 brightness steps. Brightness increases as the value increases. (RESET = 80h)  |
| 0<br>0<br>0<br>0<br>0     | 91<br>X[5:0]<br>A[5:0]<br>B[5:0]<br>C[5:0] | 1<br>*<br>*<br>*<br>*                 | 0<br>*<br>*<br>*<br>*                 | 0<br>X <sub>5</sub><br>A <sub>5</sub><br>B <sub>5</sub><br>C <sub>5</sub> | 1<br>X <sub>4</sub><br>A <sub>4</sub><br>B <sub>4</sub><br>C <sub>4</sub> | 0<br>X <sub>3</sub><br>A <sub>3</sub><br>B <sub>3</sub><br>C <sub>3</sub> | 0<br>X <sub>2</sub><br>A <sub>2</sub><br>B <sub>2</sub><br>C <sub>2</sub> | 0<br>X <sub>1</sub><br>A <sub>1</sub><br>B <sub>1</sub><br>C <sub>1</sub> | 1<br>X <sub>0</sub><br>A <sub>0</sub><br>B <sub>0</sub><br>C <sub>0</sub> | Set Look Up Table (LUT)                                  | Set current drive pulse width of BANK0, Color A, B and C.<br>BANK0: X[5:0] = 31... 63; for pulse width set to 32 ~ 64 clocks (RESET = 110001b)<br>Color A: A[5:0] same as above (RESET = 111111b)<br>Color B: B[5:0] same as above (RESET = 111111b)<br>Color C: C[5:0] same as above (RESET = 111111b)<br><br><b>Note</b><br>(1) Color D pulse width is fixed at 64 clocks pulse. |

**Fundamental Command Table**

| D/C#                  | Hex  | D7  | D6  | D5  | D4  | D3  | D2  | D1  | D0  | Command                                   | Description  |
|-----------------------|--|---|---|---|---|---|---|---|---|---|--|
| 0<br>0<br>0<br>0<br>0 | 92<br>A[7:0]<br>B[7:0]<br>C[7:0]<br>D[7:0] | 1<br>A <sub>7</sub><br>B <sub>7</sub><br>C <sub>7</sub><br>D <sub>7</sub> | 0<br>A <sub>6</sub><br>B <sub>6</sub><br>C <sub>6</sub><br>D <sub>6</sub> | 0<br>A <sub>5</sub><br>B <sub>5</sub><br>C <sub>5</sub><br>D <sub>5</sub> | 1<br>A <sub>4</sub><br>B <sub>4</sub><br>C <sub>4</sub><br>D <sub>4</sub> | 0<br>A <sub>3</sub><br>B <sub>3</sub><br>C <sub>3</sub><br>D <sub>3</sub> | 0<br>A <sub>2</sub><br>B <sub>2</sub><br>C <sub>2</sub><br>D <sub>2</sub> | 1<br>A <sub>1</sub><br>B <sub>1</sub><br>C <sub>1</sub><br>D <sub>1</sub> | 0<br>A <sub>0</sub><br>B <sub>0</sub><br>C <sub>0</sub><br>D <sub>0</sub> | Set Bank Color of BANK1 to BANK16 (PAGE0) | Set the bank color of BANK1~BANK16 to any one of the 4 colors : A, B, C and D .<br><br>A[1:0] : 00b, 01b, 10b, or 11b for Color = A, B, C or D of BANK1<br>A[3:2] : 00b, 01b, 10b, or 11b for Color = A, B, C or D of BANK2<br>:<br>:<br>D[5:4]: 00b, 01b, 10b, or 11b for Color = A, B, C or D of BANK15<br>D[7:6]: 00b, 01b, 10b, or 11b for Color = A, B, C or D of BANK16  |
| 0<br>0<br>0<br>0<br>0 | 93<br>A[7:0]<br>B[7:0]<br>C[7:0]<br>D[7:0] | 1<br>A <sub>7</sub><br>B <sub>7</sub><br>C <sub>7</sub><br>D <sub>7</sub> | 0<br>A <sub>6</sub><br>B <sub>6</sub><br>C <sub>6</sub><br>D <sub>6</sub> | 0<br>A <sub>5</sub><br>B <sub>5</sub><br>C <sub>5</sub><br>D <sub>5</sub> | 1<br>A <sub>4</sub><br>B <sub>4</sub><br>C <sub>4</sub><br>D <sub>4</sub> | 0<br>A <sub>3</sub><br>B <sub>3</sub><br>C <sub>3</sub><br>D <sub>3</sub> | 0<br>A <sub>2</sub><br>B <sub>2</sub><br>C <sub>2</sub><br>D <sub>2</sub> | 1<br>A <sub>1</sub><br>B <sub>1</sub><br>C <sub>1</sub><br>D <sub>1</sub> | 1<br>A <sub>0</sub><br>B <sub>0</sub><br>C <sub>0</sub><br>D <sub>0</sub> | Set Bank Color of BANK17~BANK32 (PAGE1)   | Set the bank color of BANK17~BANK32 to any one of the 4 colors: A, B, C and D.<br><br>A[1:0] : 00b, 01b, 10b, or 11b for Color = A, B, C or D of BANK17<br>A[3:2] : 00b, 01b, 10b, or 1b1 for Color = A, B, C or D of BANK18<br>:<br>:<br>D[5:4]: 00b, 01b, 10b, or 11b for Color = A, B, C or D of BANK31<br>D[7:6]: 00b, 01b, 10b, or 11b for Color = A, B, C or D of BANK32 |
| 0                     | A0/A1                                      | 1   | 0   | 1   | 0   | 0   | 0   | 0   | X <sub>0</sub>  | Set Segment Re-map                        | X[0]=0b: column address 0 is mapped to SEG0 (RESET)<br>X[0]=1b: column address 131 is mapped to SEG0   |
| 0                     | A4/A5                                      | 1   | 0   | 1   | 0   | 0   | 1   | 0   | X <sub>0</sub>  | Entire Display ON                         | X <sub>0</sub> =0b: Resume to RAM content display (RESET)<br>Output follows RAM content<br>X <sub>0</sub> =1b: Entire display ON<br>Output ignores RAM content   |
| 0                     | A6/A7                                      | 1   | 0   | 1   | 0   | 0   | 1   | 1   | X <sub>0</sub>  | Set Normal/Inverse Display                | X[0]=0b: Normal display (RESET)<br>0 in RAM: OFF in display panel<br>1 in RAM: ON in display panel<br><br>X[0]=1b: inverse display<br>0 in RAM: ON in display panel<br>1 in RAM: OFF in display panel  |
| 0<br>0                | A8<br>A[5:0]                               | 1<br>*  | 0<br>*  | 1<br>A <sub>5</sub>   | 0<br>A <sub>4</sub>   | 1<br>A <sub>3</sub>   | 0<br>A <sub>2</sub>   | 0<br>A <sub>1</sub>   | 0<br>A <sub>0</sub>   | Set Multiplex Ratio                       | Set MUX ratio to N+1 MUX<br>N=A[5:0] : from 16MUX to 64MUX, RESET= 11111b (i.e. 64MUX)<br>A[5:0] from 0 to 14 are invalid entry.   |
| 0                     | AA   | 1   | 0   | 1   | 0   | 1   | 0   | 1   | 0   | Reserved                                  | Reserved   |
| 0<br>0<br>0<br>0      | AB<br>A[3:0]<br>B[7:0]<br>C[7:0]           | 1<br>*<br>B <sub>7</sub><br>C <sub>7</sub>                                | 0<br>*<br>B <sub>6</sub><br>C <sub>6</sub>                                | 1<br>*<br>B <sub>5</sub><br>C <sub>5</sub>                                | 0<br>*<br>B <sub>4</sub><br>C <sub>4</sub>                                | 1<br>A <sub>3</sub><br>B <sub>3</sub><br>C <sub>3</sub>                   | 0<br>A <sub>2</sub><br>B <sub>2</sub><br>C <sub>2</sub>                   | 1<br>A <sub>1</sub><br>B <sub>1</sub><br>C <sub>1</sub>                   | 1<br>A <sub>0</sub><br>B <sub>0</sub><br>C <sub>0</sub>                   | Dim mode setting                          | A[3:0] : Reserved (set as 0000b)<br>B [7:0] : Set contrast for BANK0, valid range 0-255d, please refer to command 81h<br>C [7:0] : Set brightness for color bank, valid range 0-255d, please refer to command 82h  |

**Fundamental Command Table**

| D/C#   | Hex            | D7                  | D6                  | D5                  | D4                  | D3                  | D2                  | D1                  | D0                  | Command   | Description   |
|--------|----------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---|---|
| 0<br>0 | AD<br>A[7:0]   | 1<br>1              | 0<br>0              | 1<br>0              | 0<br>0              | 1<br>1              | 1<br>1              | 0<br>1              | 1<br>A <sub>0</sub> | Master Configuration                                | A[0]=0b, Select external V <sub>CC</sub> supply (RESET)<br>A[0]=1b, Reserved  |
| 0      | AC<br>AE<br>AF | 1                   | 0                   | 1                   | 0                   | 1                   | 1                   | A <sub>1</sub>      | A <sub>0</sub>      | Set Display ON/OFF                                  | ACH = Display ON in dim mode<br><br>AEh = Display OFF (sleep mode) (RESET)<br><br>AFh = Display ON in normal mode   |
| 0      | B0~B7          | 1                   | 0                   | 1                   | 1                   | 0                   | X <sub>2</sub>      | X <sub>1</sub>      | X <sub>0</sub>      | Set Page Start Address for Page Addressing Mode     | Set GDDRAM Page Start Address (PAGE0~PAGE7) for Page Addressing Mode using X[2:0].  |
| 0      | C0/C8          | 1                   | 1                   | 0                   | 0                   | X <sub>3</sub>      | 0                   | 0                   | 0                   | Set COM Output Scan Direction                       | X[3]=0b: normal mode (RESET) Scan from COM0 to COM[N-1]<br>X[3]=1b: remapped mode. Scan from COM[N-1] to COM0<br><br>Where N is the Multiplex ratio.  |
| 0<br>0 | D3<br>A[5:0]   | 1<br>*              | 1<br>*              | 0<br>A <sub>5</sub> | 1<br>A <sub>4</sub> | 0<br>A <sub>3</sub> | 0<br>A <sub>2</sub> | 1<br>A <sub>1</sub> | 1<br>A <sub>0</sub> | Set Display Offset                                  | Set vertical shift by COM from 0~63.<br>The value is reset to 00h after RESET.  |
| 0      | D5<br>A[7:0]   | 1<br>A <sub>7</sub> | 1<br>A <sub>6</sub> | 0<br>A <sub>5</sub> | 1<br>A <sub>4</sub> | 0<br>A <sub>3</sub> | 1<br>A <sub>2</sub> | 0<br>A <sub>1</sub> | 1<br>A <sub>0</sub> | Set Display Clock Divide Ratio/Oscillator Frequency | A[3:0] : Define the divide ratio (D) of the display clocks (DCLK):<br>Divide ratio= A[3:0] + 1, RESET is 0000b (divide ratio = 1)<br><br>A[7:4] : Set the Oscillator Frequency, F <sub>OSC</sub> . Oscillator Frequency increases with the value of A[7:4] and vice versa. RESET is 0111b<br>Range:0000b~1111b<br>Frequency increases as setting value increases. Refer to section 10.1.23 for details. |
| 0<br>0 | D8             | 1<br>0              | 1<br>0              | 0<br>X <sub>5</sub> | 1<br>X <sub>4</sub> | 1<br>0              | 0<br>X <sub>2</sub> | 0<br>0              | 0<br>X <sub>0</sub> | Set Area Color Mode ON/OFF & Low Power Display Mode | X[5:4]= 00b (RESET) : monochrome mode<br>X[5:4]= 11b Area Color enable<br><br>X[2]=0b and X[0]=0b: Normal power mode(RESET)<br>X[2]=1b and X[0]=1b: Set low power display mode  |
| 0<br>0 | D9<br>A[7:0]   | 1<br>A <sub>7</sub> | 1<br>A <sub>6</sub> | 0<br>A <sub>5</sub> | 1<br>A <sub>4</sub> | 1<br>A <sub>3</sub> | 0<br>A <sub>2</sub> | 0<br>A <sub>1</sub> | 1<br>A <sub>0</sub> | Set Pre-charge Period                               | A[3:0] : Phase 1 period of up to 15 DCLK clocks (RESET=2h); 0 is invalid entry<br><br>A[7:4] : Phase 2 period of up to 15 DCLK clocks (RESET=2h); 0 is invalid entry  |
| 0<br>0 | DA             | 1<br>0              | 1<br>0              | 0<br>X <sub>5</sub> | 1<br>X <sub>4</sub> | 1<br>0              | 0<br>0              | 1<br>1              | 0<br>0              | Set COM Pins Hardware Configuration                 | X[4]=0b, Sequential COM pin configuration<br>X[4]=1b(RESET), Alternative COM pin configuration<br><br>X[5]=0b(RESET), Disable COM Left/Right remap<br>X[5]=1b, Enable COM Left/Right remap<br><br>Please refer to Table 10-3 for details.   |

| Fundamental Command Table |          |                                  |    |                |                |                |                |    |    |                                      |   |        |          |                                  |       |     |                          |       |     |                                  |       |     |                          |
|---------------------------|----------|----------------------------------|----|----------------|----------------|----------------|----------------|----|----|--------------------------------------|---|--------|----------|----------------------------------|-------|-----|--------------------------|-------|-----|----------------------------------|-------|-----|--------------------------|
| D/C#                      | Hex      | D7                               | D6 | D5             | D4             | D3             | D2             | D1 | D0 | Command                              | Description   |        |          |                                  |       |     |                          |       |     |                                  |       |     |                          |
| 0                         | DB       | 1                                | 1  | 0              | 1              | 1              | 0              | 1  | 1  | Set V <sub>COMH</sub> Deselect Level | <table><tr><th>A[5:2]</th><th>Hex code</th><th>V<sub>COMH</sub> deselect level</th></tr><tr><td>0000b</td><td>00h</td><td>~ 0.43 x V<sub>CC</sub></td></tr><tr><td>1101b</td><td>34h</td><td>~ 0.77 x V<sub>CC</sub> (RESET)</td></tr><tr><td>1111b</td><td>3Ch</td><td>~ 0.83 x V<sub>CC</sub></td></tr></table> | A[5:2] | Hex code | V <sub>COMH</sub> deselect level | 0000b | 00h | ~ 0.43 x V <sub>CC</sub> | 1101b | 34h | ~ 0.77 x V <sub>CC</sub> (RESET) | 1111b | 3Ch | ~ 0.83 x V <sub>CC</sub> |
| A[5:2]                    | Hex code | V <sub>COMH</sub> deselect level |    |                |                |                |                |    |    |                                      |   |        |          |                                  |       |     |                          |       |     |                                  |       |     |                          |
| 0000b                     | 00h      | ~ 0.43 x V <sub>CC</sub>         |    |                |                |                |                |    |    |                                      |   |        |          |                                  |       |     |                          |       |     |                                  |       |     |                          |
| 1101b                     | 34h      | ~ 0.77 x V <sub>CC</sub> (RESET) |    |                |                |                |                |    |    |                                      |   |        |          |                                  |       |     |                          |       |     |                                  |       |     |                          |
| 1111b                     | 3Ch      | ~ 0.83 x V <sub>CC</sub>         |    |                |                |                |                |    |    |                                      |   |        |          |                                  |       |     |                          |       |     |                                  |       |     |                          |
| 0                         | A[5:2]   | 0                                | 0  | A <sub>5</sub> | A <sub>4</sub> | A <sub>3</sub> | A <sub>2</sub> | 0  | 0  |                                      |   |        |          |                                  |       |     |                          |       |     |                                  |       |     |                          |
|                           |          |                                  |    |                |                |                |                |    |    |                                      |   |        |          |                                  |       |     |                          |       |     |                                  |       |     |                          |
|                           |          |                                  |    |                |                |                |                |    |    |                                      |   |        |          |                                  |       |     |                          |       |     |                                  |       |     |                          |
| 0                         | E0       | 1                                | 1  | 1              | 0              | 0              | 0              | 0  | 0  | Enter Read Modify Write              | Enter the Read Modify Write mode.<br><br>Details please refer to section 10.1.28.   |        |          |                                  |       |     |                          |       |     |                                  |       |     |                          |
| 0                         | E3       | 1                                | 1  | 1              | 0              | 0              | 0              | 1  | 1  | NOP                                  | Command for no operation  |        |          |                                  |       |     |                          |       |     |                                  |       |     |                          |
| 0                         | EE       | 1                                | 1  | 1              | 0              | 1              | 1              | 1  | 0  | Exit Read Modify Write               | Exit the Read Modify Write mode (Please refer to command E0h)   |        |          |                                  |       |     |                          |       |     |                                  |       |     |                          |



**Graphic Acceleration Command Table**

| D/C#              | Hex             | D7           | D6 | D5             | D4             | D3             | D2             | D1             | D0             | Command  | Description   |                 |                  |                 |                  |                |                   |                |              |  |
|-------------------|-----------------|--------------|----|----------------|----------------|----------------|----------------|----------------|----------------|--|---|-----------------|------------------|-----------------|------------------|----------------|-------------------|----------------|--------------|--|
| 0                 | 26/27           | 0            | 0  | 1              | 0              | 0              | 1              | 1              | X <sub>0</sub> | Horizontal Scroll Setup  | X[0]=0, Right Horizontal Scroll<br>X[0]=1, Left Horizontal Scroll   |                 |                  |                 |                  |                |                   |                |              |  |
| 0                 | A[2:0]          | *            | *  | *              | *              | *              | A <sub>2</sub> | A <sub>1</sub> | A <sub>0</sub> |  | A[2:0] : Set number of column scroll offset<br>000b No horizontal scroll<br>001b Horizontal scroll by 1 column<br>010b Horizontal scroll by 2 columns<br>011b Horizontal scroll by 3 columns<br>100b Horizontal scroll by 4 columns<br>Other values are invalid.  |                 |                  |                 |                  |                |                   |                |              |  |
| 0                 | B[2:0]          | *            | *  | *              | *              | *              | B <sub>2</sub> | B <sub>1</sub> | B <sub>0</sub> |  | B[2:0] : Define start page address<br><table><tr><td>000b – PAGE0</td><td>011b – PAGE3</td><td>110b – PAGE6</td></tr><tr><td>001b – PAGE1</td><td>100b – PAGE4</td><td>111b – PAGE7</td></tr><tr><td>010b – PAGE2</td><td>101b – PAGE5</td><td></td></tr></table> | 000b – PAGE0    | 011b – PAGE3     | 110b – PAGE6    | 001b – PAGE1     | 100b – PAGE4   | 111b – PAGE7      | 010b – PAGE2   | 101b – PAGE5 |  |
| 000b – PAGE0      | 011b – PAGE3    | 110b – PAGE6 |    |                |                |                |                |                |                |  |   |                 |                  |                 |                  |                |                   |                |              |  |
| 001b – PAGE1      | 100b – PAGE4    | 111b – PAGE7 |    |                |                |                |                |                |                |  |   |                 |                  |                 |                  |                |                   |                |              |  |
| 010b – PAGE2      | 101b – PAGE5    |              |    |                |                |                |                |                |                |  |   |                 |                  |                 |                  |                |                   |                |              |  |
| 0                 | C[2:0]          | *            | *  | *              | *              | *              | C <sub>2</sub> | C <sub>1</sub> | C <sub>0</sub> | C[2:0] : Set time interval between each scroll step in terms of frame frequency<br><table><tr><td>000b – 6 frames</td><td>100b – 3 frames</td></tr><tr><td>001b – 32 frames</td><td>101b – 4 frames</td></tr><tr><td>010b – 64 frames</td><td>110b – 2 frame</td></tr><tr><td>011b – 128 frames</td><td>111b – Invalid</td></tr></table> | 000b – 6 frames   | 100b – 3 frames | 001b – 32 frames | 101b – 4 frames | 010b – 64 frames | 110b – 2 frame | 011b – 128 frames | 111b – Invalid |              |  |
| 000b – 6 frames   | 100b – 3 frames |              |    |                |                |                |                |                |                |  |   |                 |                  |                 |                  |                |                   |                |              |  |
| 001b – 32 frames  | 101b – 4 frames |              |    |                |                |                |                |                |                |  |   |                 |                  |                 |                  |                |                   |                |              |  |
| 010b – 64 frames  | 110b – 2 frame  |              |    |                |                |                |                |                |                |  |   |                 |                  |                 |                  |                |                   |                |              |  |
| 011b – 128 frames | 111b – Invalid  |              |    |                |                |                |                |                |                |  |   |                 |                  |                 |                  |                |                   |                |              |  |
| 0                 | D[2:0]          | *            | *  | *              | *              | *              | D <sub>2</sub> | D <sub>1</sub> | D <sub>0</sub> | D[2:0] : Define end page address<br><table><tr><td>000b – PAGE0</td><td>011b – PAGE3</td><td>110b – PAGE6</td></tr><tr><td>001b – PAGE1</td><td>100b – PAGE4</td><td>111b – PAGE7</td></tr><tr><td>010b – PAGE2</td><td>101b – PAGE5</td><td></td></tr></table><br>The value of D[2:0] must be larger or equal to B[2:0]                 | 000b – PAGE0  | 011b – PAGE3    | 110b – PAGE6     | 001b – PAGE1    | 100b – PAGE4     | 111b – PAGE7   | 010b – PAGE2      | 101b – PAGE5   |              |  |
| 000b – PAGE0      | 011b – PAGE3    | 110b – PAGE6 |    |                |                |                |                |                |                |  |   |                 |                  |                 |                  |                |                   |                |              |  |
| 001b – PAGE1      | 100b – PAGE4    | 111b – PAGE7 |    |                |                |                |                |                |                |  |   |                 |                  |                 |                  |                |                   |                |              |  |
| 010b – PAGE2      | 101b – PAGE5    |              |    |                |                |                |                |                |                |  |   |                 |                  |                 |                  |                |                   |                |              |  |
| 0                 | 29/2A           | 0            | 0  | 1              | 0              | 1              | 0              | X <sub>1</sub> | X <sub>0</sub> | Continuous Vertical and Horizontal Scroll Setup  | X <sub>1</sub> X <sub>0</sub> =01b : Vertical and Right Horizontal Scroll<br>X <sub>1</sub> X <sub>0</sub> =10b : Vertical and Left Horizontal Scroll   |                 |                  |                 |                  |                |                   |                |              |  |
| 0                 | A[2:0]          | *            | *  | *              | *              | *              | A <sub>2</sub> | A <sub>1</sub> | A <sub>0</sub> |  | A[2:0] : Set number of column scroll offset<br>000b No horizontal scroll<br>001b Horizontal scroll by 1 column<br>010b Horizontal scroll by 2 columns<br>011b Horizontal scroll by 3 columns<br>100b Horizontal scroll by 4 columns<br>Other values are invalid.  |                 |                  |                 |                  |                |                   |                |              |  |
| 0                 | B[2:0]          | *            | *  | *              | *              | *              | B <sub>2</sub> | B <sub>1</sub> | B <sub>0</sub> |  | B[2:0] : Define start page address<br><table><tr><td>000b – PAGE0</td><td>011b – PAGE3</td><td>110b – PAGE6</td></tr><tr><td>001b – PAGE1</td><td>100b – PAGE4</td><td>111b – PAGE7</td></tr><tr><td>010b – PAGE2</td><td>101b – PAGE5</td><td></td></tr></table> | 000b – PAGE0    | 011b – PAGE3     | 110b – PAGE6    | 001b – PAGE1     | 100b – PAGE4   | 111b – PAGE7      | 010b – PAGE2   | 101b – PAGE5 |  |
| 000b – PAGE0      | 011b – PAGE3    | 110b – PAGE6 |    |                |                |                |                |                |                |  |   |                 |                  |                 |                  |                |                   |                |              |  |
| 001b – PAGE1      | 100b – PAGE4    | 111b – PAGE7 |    |                |                |                |                |                |                |  |   |                 |                  |                 |                  |                |                   |                |              |  |
| 010b – PAGE2      | 101b – PAGE5    |              |    |                |                |                |                |                |                |  |   |                 |                  |                 |                  |                |                   |                |              |  |
| 0                 | C[2:0]          | *            | *  | *              | *              | *              | C <sub>2</sub> | C <sub>1</sub> | C <sub>0</sub> | C[2:0] : Set time interval between each scroll step in terms of frame frequency<br><table><tr><td>000b – 6 frames</td><td>100b – 3 frames</td></tr><tr><td>001b – 32 frames</td><td>101b – 4 frames</td></tr><tr><td>010b – 64 frames</td><td>110b – 2 frame</td></tr><tr><td>011b – 128 frames</td><td>111b – Invalid</td></tr></table> | 000b – 6 frames   | 100b – 3 frames | 001b – 32 frames | 101b – 4 frames | 010b – 64 frames | 110b – 2 frame | 011b – 128 frames | 111b – Invalid |              |  |
| 000b – 6 frames   | 100b – 3 frames |              |    |                |                |                |                |                |                |  |   |                 |                  |                 |                  |                |                   |                |              |  |
| 001b – 32 frames  | 101b – 4 frames |              |    |                |                |                |                |                |                |  |   |                 |                  |                 |                  |                |                   |                |              |  |
| 010b – 64 frames  | 110b – 2 frame  |              |    |                |                |                |                |                |                |  |   |                 |                  |                 |                  |                |                   |                |              |  |
| 011b – 128 frames | 111b – Invalid  |              |    |                |                |                |                |                |                |  |   |                 |                  |                 |                  |                |                   |                |              |  |
| 0                 | D[2:0]          | *            | *  | *              | *              | *              | D <sub>2</sub> | D <sub>1</sub> | D <sub>0</sub> | D[2:0] : Define end page address<br><table><tr><td>000b – PAGE0</td><td>011b – PAGE3</td><td>110b – PAGE6</td></tr><tr><td>001b – PAGE1</td><td>100b – PAGE4</td><td>111b – PAGE7</td></tr><tr><td>010b – PAGE2</td><td>101b – PAGE5</td><td></td></tr></table><br>The value of D[2:0] must be larger or equal to B[2:0]                 | 000b – PAGE0  | 011b – PAGE3    | 110b – PAGE6     | 001b – PAGE1    | 100b – PAGE4     | 111b – PAGE7   | 010b – PAGE2      | 101b – PAGE5   |              |  |
| 000b – PAGE0      | 011b – PAGE3    | 110b – PAGE6 |    |                |                |                |                |                |                |  |   |                 |                  |                 |                  |                |                   |                |              |  |
| 001b – PAGE1      | 100b – PAGE4    | 111b – PAGE7 |    |                |                |                |                |                |                |  |   |                 |                  |                 |                  |                |                   |                |              |  |
| 010b – PAGE2      | 101b – PAGE5    |              |    |                |                |                |                |                |                |  |   |                 |                  |                 |                  |                |                   |                |              |  |
| 0                 | E[5:0]          | *            | *  | E <sub>5</sub> | E <sub>4</sub> | E <sub>3</sub> | E <sub>2</sub> | E <sub>1</sub> | E <sub>0</sub> |  | E[5:0] : Vertical scrolling offset<br>e.g. E[5:0]= 01h refer to offset =1 row<br>E[5:0] =3Fh refer to offset =63 rows   |                 |                  |                 |                  |                |                   |                |              |  |

**Graphic Acceleration Command Table**

| D/C#        | Hex                    | D7          | D6                       | D5                                    | D4                                    | D3                                    | D2                                    | D1                                    | D0                                    | Command                  | Description  |
|-------------|------------------------|-------------|--------------------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|--------------------------|--|
| 0           | 2E                     | 0           | 0                        | 1                                     | 0                                     | 1                                     | 1                                     | 1                                     | 0                                     | Deactivate scroll        | <p>Stop scrolling that is configured by command 26h/27h/29h/2Ah.</p> <p><b>Note</b><br/> <sup>(1)</sup> After sending 2Eh command to deactivate the scrolling action, the ram data needs to be rewritten.</p>  |
| 0           | 2F                     | 0           | 0                        | 1                                     | 0                                     | 1                                     | 1                                     | 1                                     | 1                                     | Activate scroll          | <p>Start scrolling that is configured by the scrolling setup commands :26h/27h/29h/2Ah with the following valid sequences:<br/> Valid command sequence 1: 26h ;2Fh.<br/> Valid command sequence 2: 27h ;2Fh.<br/> Valid command sequence 3: 29h ;2Fh.<br/> Valid command sequence 4: 2Ah ;2Fh.</p> <p>For example, if “26h; 2Ah; 2Fh.” commands are issued, the setting in the last scrolling setup command, i.e. 2Ah in this case, will be executed. In other words, setting in the last scrolling setup command overwrites the setting in the previous scrolling setup commands.</p>   |
| 0<br>0<br>0 | A3<br>A[5:0]<br>B[6:0] | 1<br>*<br>* | 0<br>*<br>B <sub>6</sub> | 1<br>A <sub>5</sub><br>B <sub>5</sub> | 0<br>A <sub>4</sub><br>B <sub>4</sub> | 0<br>A <sub>3</sub><br>B <sub>3</sub> | 0<br>A <sub>2</sub><br>B <sub>2</sub> | 1<br>A <sub>1</sub><br>B <sub>1</sub> | 1<br>A <sub>0</sub><br>B <sub>0</sub> | Set Vertical Scroll Area | <p>A[5:0] : Set No. of rows in top fixed area. The No. of rows in top fixed area is referenced to the top of the GDDRAM (i.e. row 0). [RESET = 0]</p> <p>B[6:0] : Set No. of rows in scroll area. This is the number of rows to be used for vertical scrolling. The scroll area starts in the first row below the top fixed area. [RESET = 64]</p> <p><b>Note</b><br/> <sup>(1)</sup> A[5:0]+B[6:0] &lt;= MUX ratio<br/> <sup>(2)</sup> B[6:0] &lt;= MUX ratio<br/> <sup>(3a)</sup> Vertical scrolling offset (E[5:0] in 29h/2Ah) &lt; B[6:0]<br/> <sup>(3b)</sup> Set Display Start Line (X5X4X3X2X1X0 of 40h~7Fh) &lt; B[6:0]<br/> <sup>(4)</sup> The last row of the scroll area shifts to the first row of the scroll area.<br/> <sup>(5)</sup> For 64d MUX display<br/> A[5:0] = 0, B[6:0]=64 : whole area scrolls<br/> A[5:0]= 0, B[6:0] &lt; 64 : top area scrolls<br/> A[5:0] + B[6:0] &lt; 64 : central area scrolls<br/> A[5:0] + B[6:0] = 64 : bottom area scrolls<br/> Please refer to Figure 10-14 for details.</p> |

**Note**

<sup>(1)</sup> “\*” stands for “Don’t care”.

**Table 9-2 : Read Command Table**

| Bit Pattern   | Command              | Description   |
|---|----------------------|---|
| D <sub>7</sub> D <sub>6</sub> D <sub>5</sub> D <sub>4</sub> D <sub>3</sub> D <sub>2</sub> D <sub>1</sub> D <sub>0</sub> | Status Register Read | D[7] : Reserve<br>D[6] : “1” for display OFF / “0” for display ON<br>D[5] : Reserve<br>D[4] : Reserve<br>D[3] : Reserve<br>D[2] : Reserve<br>D[1] : Reserve<br>D[0] : Reserve |

**Note**

<sup>(1)</sup> Patterns other than those given in the Command Table are prohibited to enter the chip as a command; as unexpected results can occur.

**9.1 Data Read / Write**

To read data from the GDDRAM, select HIGH for both the R/W# (WR#) pin and the D/C# pin for 6800-series parallel mode and select LOW for the E (RD#) pin and HIGH for the D/C# pin for 8080-series parallel mode. No data read is provided in serial mode operation.

In normal data read mode the GDDRAM column address pointer will be increased automatically by one after each data read.

Also, a dummy read is required before the first data read.

To write data to the GDDRAM, select LOW for the R/W# (WR#) pin and HIGH for the D/C# pin for both 6800-series parallel mode and 8080-series parallel mode. The serial interface mode is always in write mode. The GDDRAM column address pointer will be increased automatically by one after each data write.

**Table 9-3 : Address increment table (Automatic)**

| D/C# | R/W# (WR#) | Comment       | Address Increment  |
|------|------------|---------------|--------------------|
| 0    | 0          | Write Command | No                 |
| 0    | 1          | Read Status   | No                 |
| 1    | 0          | Write Data    | Yes                |
| 1    | 1          | Read Data     | Yes <sup>(1)</sup> |

**Note**

<sup>(1)</sup> If read-data command is issued in read-modify-write mode no address increase occurs.

## 10 COMMAND DESCRIPTIONS

### 10.1 Fundamental Command

#### 10.1.1 Set Lower Column Start Address for Page Addressing Mode (00h~0Fh)

This command specifies the lower nibble of the 8-bit column start address for the display data RAM under Page Addressing Mode. The column address will be incremented by each data access. Please refer to Section Table 9-1 and Section 10.1.3 for details.

#### 10.1.2 Set Higher Column Start Address for Page Addressing Mode (10h~1Fh)

This command specifies the higher nibble of the 8-bit column start address for the display data RAM under Page Addressing Mode. The column address will be incremented by each data access. Please refer to Section Table 9-1 and Section 10.1.3 for details.

#### 10.1.3 Set Memory Addressing Mode (20h)

There are 3 different memory addressing mode in SSD1305: page addressing mode, horizontal addressing mode and vertical addressing mode. This command sets the way of memory addressing into one of the above three modes. In there, “COL” means the graphic display data RAM column.

##### Page addressing mode (A[1:0]=10xb)

In page addressing mode, after the display RAM is read/written, the column address pointer is increased automatically by 1. If the column address pointer reaches column end address, the column address pointer is reset to column start address and page address pointer is not changed. Users have to set the new page and column addresses in order to access the next page RAM content. The sequence of movement of the PAGE and column address pointer for page addressing mode is shown in Figure 10-1.

**Figure 10-1 : Address Pointer Movement of Page addressing mode**


|       | COL0 | COL 1 | ..... | COL 130 | COL 131 |
|-------|------|-------|-------|---------|---------|
| PAGE0 | →    | →     | →     | →       | →       |
| PAGE1 | →    | →     | →     | →       | →       |
| :     | :    | :     | :     | :       | :       |
| PAGE6 | →    | →     | →     | →       | →       |
| PAGE7 | →    | →     | →     | →       | →       |

In normal display data RAM read or write and page addressing mode, the following steps are required to define the starting RAM access pointer location:

- Set the page start address of the target display location by command B0h to B7h.
- Set the lower start column address of pointer by command 00h~0Fh.
- Set the upper start column address of pointer by command 10h~1Fh.

For example, if the page address is set to B2h, lower column address is 03h and upper column address is 10h, then that means the starting column is SEG3 of PAGE2. The RAM access pointer is located as shown in Figure 10-2. The input data byte will be written into RAM position of column 3.


**Figure 10-2 : Example of GDDRAM access pointer setting in Page Addressing Mode (No row and column-remapping)**

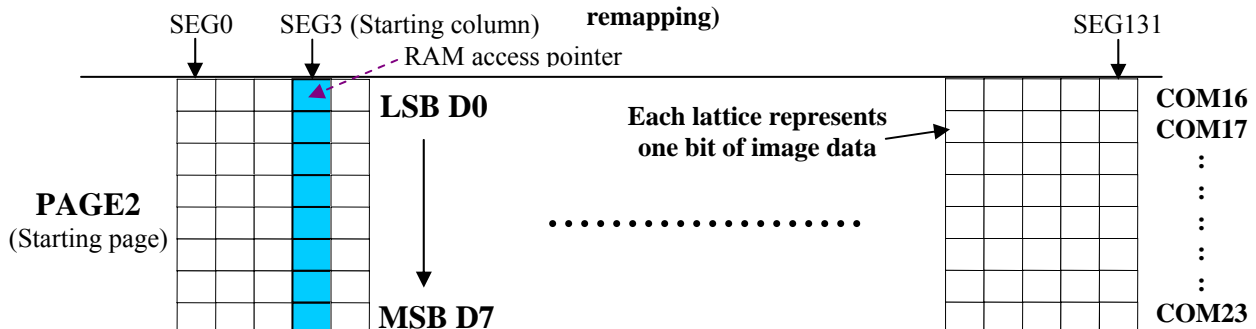

#### Horizontal addressing mode (A[1:0]=00b)

In horizontal addressing mode, after the display RAM is read/written, the column address pointer is increased automatically by 1. If the column address pointer reaches column end address, the column address pointer is reset to column start address and page address pointer is increased by 1. The sequence of movement of the page and column address pointer for horizontal addressing mode is shown in Figure 10-3. When both column and page address pointers reach the end address, the pointers are reset to column start address and page start address (Dotted line in Figure 10-3.)


**Figure 10-3 : Address Pointer Movement of Horizontal addressing mode**

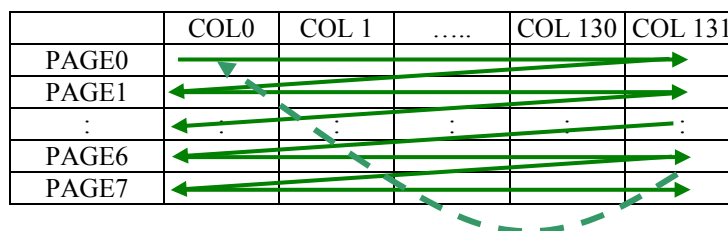

#### Vertical addressing mode: (A[1:0]=01b)

In vertical addressing mode, after the display RAM is read/written, the page address pointer is increased automatically by 1. If the page address pointer reaches the page end address, the page address pointer is reset to page start address and column address pointer is increased by 1. The sequence of movement of the page and column address pointer for vertical addressing mode is shown in Figure 10-4. When both column and page address pointers reach the end address, the pointers are reset to column start address and page start address (Dotted line in Figure 10-4.)

**Figure 10-4 : Address Pointer Movement of Vertical addressing mode**

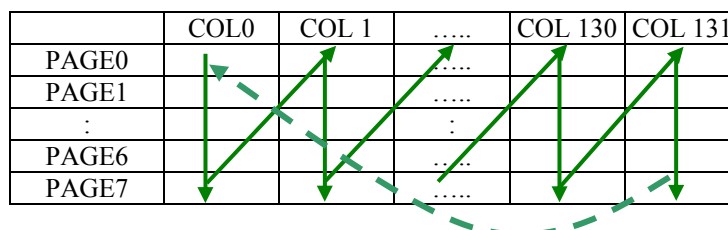

In normal display data RAM read or write and horizontal / vertical addressing mode, the following steps are required to define the RAM access pointer location:

- Set the column start and end address of the target display location by command 21h.
- Set the page start and end address of the target display location by command 22h.

Example is shown in Figure 10-5.

#### 10.1.4 Set Column Address (21h)

This triple byte command specifies column start address and end address of the display data RAM. This command also sets the column address pointer to column start address. This pointer is used to define the current read/write column address in graphic display data RAM. If horizontal address increment mode is enabled by command 20h, after finishing read/write one column data, it is incremented automatically to the next column address. Whenever the column address pointer finishes accessing the end column address, it is reset back to start column address and the row address is incremented to the next row.

### 10.1.5 Set Page Address (22h)

This triple byte command specifies page start address and end address of the display data RAM. This command also sets the page address pointer to page start address. This pointer is used to define the current read/write page address in graphic display data RAM. If vertical address increment mode is enabled by command 20h, after finishing read/write one page data, it is incremented automatically to the next page address. Whenever the page address pointer finishes accessing the end page address, it is reset back to start page address.

The figure below shows the way of column and page address pointer movement through the example: column start address is set to 2 and column end address is set to 129, page start address is set to 1 and page end address is set to 6; Horizontal address increment mode is enabled by command 20h. In this case, the graphic display data RAM column accessible range is from column 2 to column 129 and from page 1 to page 6 only. In addition, the column address pointer is set to 2 and page address pointer is set to 1. After finishing read/write one pixel of data, the column address is increased automatically by 1 to access the next RAM location for next read/write operation (*solid line in Figure 10-5*). Whenever the column address pointer finishes accessing the end column 129, it is reset back to column 2 and page address is automatically increased by 1 (*solid line in Figure 10-5*). While the end page 6 and end column 129 RAM location is accessed, the page address is reset back to 1 and the column address is reset back to 2 (*dotted line in Figure 10-5*). .

**Figure 10-5 : Example of Column and Row Address Pointer Movement**

|       | Col 0 | Col 1 | Col 2 | ..... | ..... | Col 129 | Col 130 | Col 131 |
|-------|-------|-------|-------|-------|-------|---------|---------|---------|
| PAGE0 |       |       |       |       |       |         |         |         |
| PAGE1 |       |       |       |       |       |         |         |         |
| :     |       |       |       |       |       |         |         |         |
| PAGE6 |       |       |       |       |       |         |         |         |
| PAGE7 |       |       |       |       |       |         |         |         |

### 10.1.6 Set Display Start Line (40h~7Fh)


This command sets the Display Start Line register to determine starting address of display RAM, by selecting a value from 0 to 63. With value equal to 0, RAM row 0 is mapped to COM0. With value equal to 1, RAM row 1 is mapped to COM0 and so on.

Refer to Table 10-1 for more illustrations.

### 10.1.7 Set Contrast Control for BANK0 (81h)

This command sets the Contrast Setting of the display. The chip has 256 contrast steps from 00h to FFh. The segment output current increases as the contrast step value increases. See Figure 10-6 below.

Figure 10-6 : Segment current vs Contrast setting

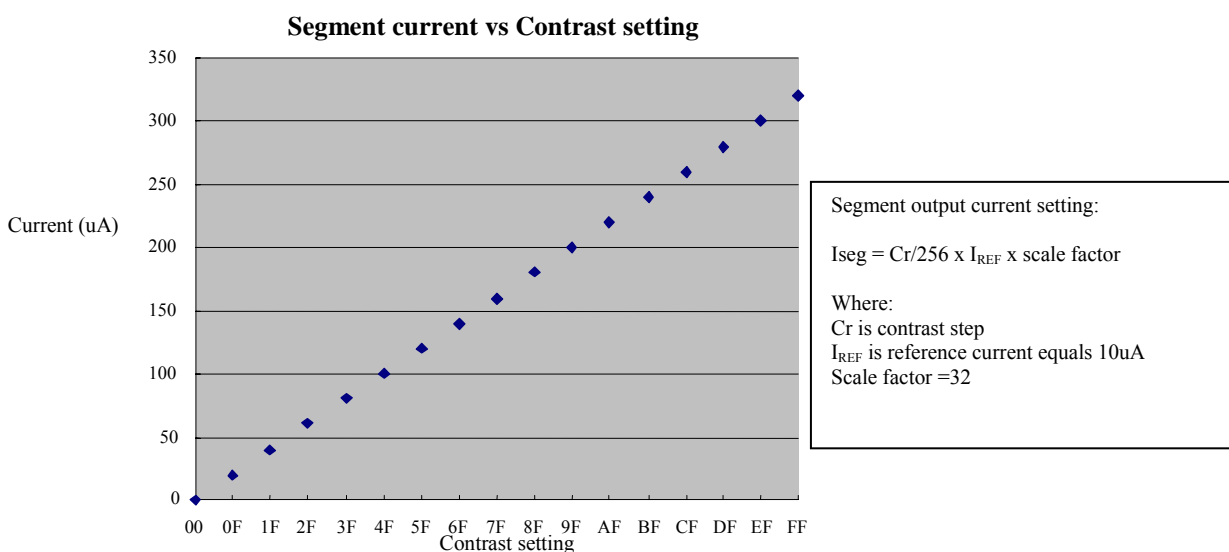

### 10.1.8 Set Brightness for Area Color Banks (82h)

This command sets the Brightness Setting of the display for the area color banks. The chip has 256 brightness steps from 00h to FFh. The segment output current increases as the brightness step value increases.

This setting does not affect the contrast of BANK0, which is set by command 81h.

### 10.1.9 Set Look Up Table (LUT) (91h)

The SSD1305 provides 4 color settings - Colors A, B, C and D for the bank color of BANK1 to BANK32 under the area color mode. The color intensity (or grey scale) is defined by the current drive pulse width. This pulse width setting must be stored in the Look Up Table (LUT). The pulse width of colors A, B, C is programmable from 32 to 64 DCLKs. The color D is fixed at 64 DCLKs pulse width. For the grey scale in BANK0, the pulse width is programmable from 32 to 64 DCLKs. Please refer to 91h command in Table 9-1 for details of the LUT setting.

After setting the pulse widths for the color of A, B, C, D and BANK0, the next step is to define the color of each display area. Each bank can be programmable to any one of the 4 colors (A, B, C and D). The user can use 92h and 93h commands for the bank color setting. It should be notice that this is only applicable in area color mode.

#### **10.1.10 Set Bank Color of BANK1 to BANK16 (PAGE0) (92h)**

This command maps the bank color (pulse width) of BANK1~BANK16 to any one of the 4 colors: A, B, C and D. For details of the setting, please refer to 92h command in Table 9-1.

#### **10.1.11 Set Bank Color of BANK17 to BANK32 (PAGE0) (93h)**

This command maps the bank color (pulse width) of BANK17~BANK32 to any one of the 4 colors: A, B, C and D. For details of the setting, please refer to 93h command in Table 9-1.

#### **10.1.12 Set Segment Re-map (A0h/A1h)**

This command changes the mapping between the display data column address and the segment driver. It allows flexibility in OLED module design. Please refer to Table 9-1.

This command only affects subsequent data input. Data already stored in GDDRAM will have no changes.

#### **10.1.13 Entire Display ON (A4h/A5h)**

A4h command enable display outputs according to the GDDRAM contents.

If A5h command is issued, then by using A4h command, the display will resume to the GDDRAM contents. In other words, A4h command resumes the display from entire display “ON” stage.

A5h command forces the entire display to be “ON”, regardless of the contents of the display data RAM.

#### **10.1.14 Set Normal/Inverse Display (A6h/A7h)**

This command sets the display to be either normal or inverse. In normal display a RAM data of 1 indicates an “ON” pixel while in inverse display a RAM data of 0 indicates an “ON” pixel.

#### **10.1.15 Set Multiplex Ratio (A8h)**

This command switches the default 63 multiplex mode to any multiplex ratio, ranging from 16 to 63. The output pads COM0~COM63 will be switched to the corresponding COM signal.

#### **10.1.16 Reserved (AAh)**

This command is reserved.

#### **10.1.17 Dim Mode setting (ABh)**

This command contains multiple bits to configure the contrast and brightness of color bank for the display in dim mode. The brightness setting of color bank can be set different to normal mode (AFh). The display can be set in dim mode through command ACh.

#### **10.1.18 Master Configuration (ADh)**

This command selects the external  $V_{CC}$  power supply by default. As external  $V_{CC}$  power supply is selected, external  $V_{CC}$  power should be connected to the  $V_{CC}$  pin.



### 10.1.19 Set Display ON/OFF (ACh/AEh/AFh)

These single byte commands are used to turn the OLED panel display ON or OFF.

When the display is ON, the selected circuits by Set Master Configuration command will be turned ON.


When the display is OFF, those circuits will be turned OFF and the segment and common output are in high impedance state.

These commands set the display to one of the three states:

- ACh : Dim Mode Display ON
- AEh : Display OFF
- AFh : Normal Brightness Display ON

where the dim mode settings are controlled by command ABh.

**Figure 10-7 :Transition between different modes**

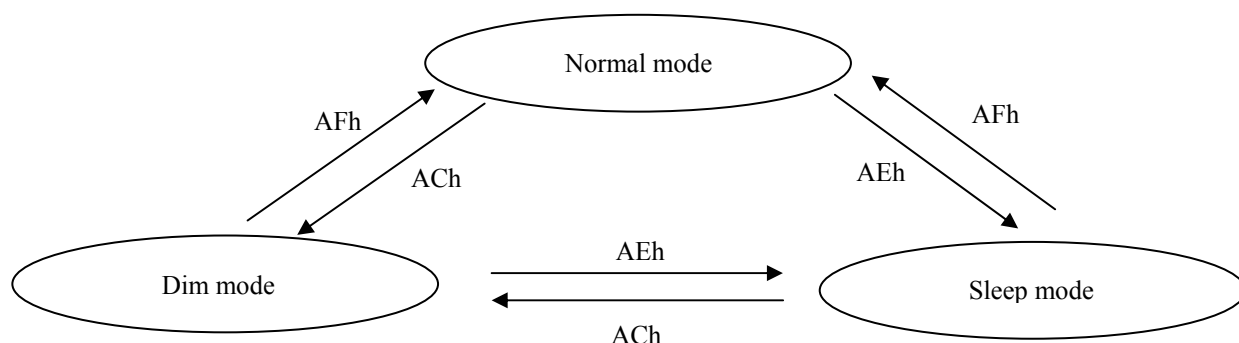

### 10.1.20 Set Page Start Address for Page Addressing Mode (B0h~B7h)

This command positions the page start address from 0 to 7 in GDDRAM under Page Addressing Mode. Please refer to Table 9-1 and Section 10.1.3 for details.

### 10.1.21 Set COM Output Scan Direction (C0h/C8h)

This command sets the scan direction of the COM output, allowing layout flexibility in the OLED module design. Additionally, the display will show once this command is issued. For example, if this command is sent during normal display then the graphic display will be vertically flipped immediately. Please refer to Table 10-3 for details.

### 10.1.22 Set Display Offset (D3h)

This is a double byte command. The second command specifies the mapping of the display start line to one of COM0~COM63 (assuming that COM0 is the display start line then the display start line register is equal to 0). For example, to move the COM16 towards the COM0 direction by 16 lines the 6-bit data in the second byte should be given as 010000b. To move in the opposite direction by 16 lines the 6-bit data should be given by 64 – 16, so the second byte would be 100000b.

The following two tables (Table 10-1, Table 10-2) show the example of setting the command C0h/C8h and D3h.

**Table 10-1 : Example of Set Display Offset and Display Start Line with no Remap**

| Hardware<br>pin name | Output |       |        |       |        |       |        |       |        |       |        |       | Set MUX ratio(A8h)<br>COM Normal / Remapped (C0h / C8h)<br>Display offset (D3h)<br>Display start line (40h - 7Fh) |
|----------------------|--------|-------|--------|-------|--------|-------|--------|-------|--------|-------|--------|-------|---|
|                      | 64     |       | 64     |       | 64     |       | 56     |       | 56     |       | 56     |       |   |
|                      | Normal |       | Normal |       | Normal |       | Normal |       | Normal |       | Normal |       |   |
|                      | 0      |       | 8      |       | 0      |       | 0      |       | 8      |       | 0      |       |   |
| 0                    |        | 0     |        | 8     |        | 0     |        | 0     |        | 8     |        | 8     |   |
| COM0                 | Row0   | RAM0  | Row8   | RAM8  | Row0   | RAM8  | Row0   | RAM0  | Row8   | RAM8  | Row0   | RAM8  |   |
| COM1                 | Row1   | RAM1  | Row9   | RAM9  | Row1   | RAM9  | Row1   | RAM1  | Row9   | RAM9  | Row1   | RAM9  |   |
| COM2                 | Row2   | RAM2  | Row10  | RAM10 | Row2   | RAM10 | Row2   | RAM2  | Row10  | RAM10 | Row2   | RAM10 |   |
| COM3                 | Row3   | RAM3  | Row11  | RAM11 | Row3   | RAM11 | Row3   | RAM3  | Row11  | RAM11 | Row3   | RAM11 |   |
| COM4                 | Row4   | RAM4  | Row12  | RAM12 | Row4   | RAM12 | Row4   | RAM4  | Row12  | RAM12 | Row4   | RAM12 |   |
| COM5                 | Row5   | RAM5  | Row13  | RAM13 | Row5   | RAM13 | Row5   | RAM5  | Row13  | RAM13 | Row5   | RAM13 |   |
| COM6                 | Row6   | RAM6  | Row14  | RAM14 | Row6   | RAM14 | Row6   | RAM6  | Row14  | RAM14 | Row6   | RAM14 |   |
| COM7                 | Row7   | RAM7  | Row15  | RAM15 | Row7   | RAM15 | Row7   | RAM7  | Row15  | RAM15 | Row7   | RAM15 |   |
| COM8                 | Row8   | RAM8  | Row16  | RAM16 | Row8   | RAM16 | Row8   | RAM8  | Row16  | RAM16 | Row8   | RAM16 |   |
| COM9                 | Row9   | RAM9  | Row17  | RAM17 | Row9   | RAM17 | Row9   | RAM9  | Row17  | RAM17 | Row9   | RAM17 |   |
| COM10                | Row10  | RAM10 | Row18  | RAM18 | Row10  | RAM18 | Row10  | RAM10 | Row18  | RAM18 | Row10  | RAM18 |   |
| COM11                | Row11  | RAM11 | Row19  | RAM19 | Row11  | RAM19 | Row11  | RAM11 | Row19  | RAM19 | Row11  | RAM19 |   |
| COM12                | Row12  | RAM12 | Row20  | RAM20 | Row12  | RAM20 | Row12  | RAM12 | Row20  | RAM20 | Row12  | RAM20 |   |
| COM13                | Row13  | RAM13 | Row21  | RAM21 | Row13  | RAM21 | Row13  | RAM13 | Row21  | RAM21 | Row13  | RAM21 |   |
| COM14                | Row14  | RAM14 | Row22  | RAM22 | Row14  | RAM22 | Row14  | RAM14 | Row22  | RAM22 | Row14  | RAM22 |   |
| COM15                | Row15  | RAM15 | Row23  | RAM23 | Row15  | RAM23 | Row15  | RAM15 | Row23  | RAM23 | Row15  | RAM23 |   |
| COM16                | Row16  | RAM16 | Row24  | RAM24 | Row16  | RAM24 | Row16  | RAM16 | Row24  | RAM24 | Row16  | RAM24 |   |
| COM17                | Row17  | RAM17 | Row25  | RAM25 | Row17  | RAM25 | Row17  | RAM17 | Row25  | RAM25 | Row17  | RAM25 |   |
| COM18                | Row18  | RAM18 | Row26  | RAM26 | Row18  | RAM26 | Row18  | RAM18 | Row26  | RAM26 | Row18  | RAM26 |   |
| COM19                | Row19  | RAM19 | Row27  | RAM27 | Row19  | RAM27 | Row19  | RAM19 | Row27  | RAM27 | Row19  | RAM27 |   |
| COM20                | Row20  | RAM20 | Row28  | RAM28 | Row20  | RAM28 | Row20  | RAM20 | Row28  | RAM28 | Row20  | RAM28 |   |
| COM21                | Row21  | RAM21 | Row29  | RAM29 | Row21  | RAM29 | Row21  | RAM21 | Row29  | RAM29 | Row21  | RAM29 |   |
| COM22                | Row22  | RAM22 | Row30  | RAM30 | Row22  | RAM30 | Row22  | RAM22 | Row30  | RAM30 | Row22  | RAM30 |   |
| COM23                | Row23  | RAM23 | Row31  | RAM31 | Row23  | RAM31 | Row23  | RAM23 | Row31  | RAM31 | Row23  | RAM31 |   |
| COM24                | Row24  | RAM24 | Row32  | RAM32 | Row24  | RAM32 | Row24  | RAM24 | Row32  | RAM32 | Row24  | RAM32 |   |
| COM25                | Row25  | RAM25 | Row33  | RAM33 | Row25  | RAM33 | Row25  | RAM25 | Row33  | RAM33 | Row25  | RAM33 |   |
| COM26                | Row26  | RAM26 | Row34  | RAM34 | Row26  | RAM34 | Row26  | RAM26 | Row34  | RAM34 | Row26  | RAM34 |   |
| COM27                | Row27  | RAM27 | Row35  | RAM35 | Row27  | RAM35 | Row27  | RAM27 | Row35  | RAM35 | Row27  | RAM35 |   |
| COM28                | Row28  | RAM28 | Row36  | RAM36 | Row28  | RAM36 | Row28  | RAM28 | Row36  | RAM36 | Row28  | RAM36 |   |
| COM29                | Row29  | RAM29 | Row37  | RAM37 | Row29  | RAM37 | Row29  | RAM29 | Row37  | RAM37 | Row29  | RAM37 |   |
| COM30                | Row30  | RAM30 | Row38  | RAM38 | Row30  | RAM38 | Row30  | RAM30 | Row38  | RAM38 | Row30  | RAM38 |   |
| COM31                | Row31  | RAM31 | Row39  | RAM39 | Row31  | RAM39 | Row31  | RAM31 | Row39  | RAM39 | Row31  | RAM39 |   |
| COM32                | Row32  | RAM32 | Row40  | RAM40 | Row32  | RAM40 | Row32  | RAM32 | Row40  | RAM40 | Row32  | RAM40 |   |
| COM33                | Row33  | RAM33 | Row41  | RAM41 | Row33  | RAM41 | Row33  | RAM33 | Row41  | RAM41 | Row33  | RAM41 |   |
| COM34                | Row34  | RAM34 | Row42  | RAM42 | Row34  | RAM42 | Row34  | RAM34 | Row42  | RAM42 | Row34  | RAM42 |   |
| COM35                | Row35  | RAM35 | Row43  | RAM43 | Row35  | RAM43 | Row35  | RAM35 | Row43  | RAM43 | Row35  | RAM43 |   |
| COM36                | Row36  | RAM36 | Row44  | RAM44 | Row36  | RAM44 | Row36  | RAM36 | Row44  | RAM44 | Row36  | RAM44 |   |
| COM37                | Row37  | RAM37 | Row45  | RAM45 | Row37  | RAM45 | Row37  | RAM37 | Row45  | RAM45 | Row37  | RAM45 |   |
| COM38                | Row38  | RAM38 | Row46  | RAM46 | Row38  | RAM46 | Row38  | RAM38 | Row46  | RAM46 | Row38  | RAM46 |   |
| COM39                | Row39  | RAM39 | Row47  | RAM47 | Row39  | RAM47 | Row39  | RAM39 | Row47  | RAM47 | Row39  | RAM47 |   |
| COM40                | Row40  | RAM40 | Row48  | RAM48 | Row40  | RAM48 | Row40  | RAM40 | Row48  | RAM48 | Row40  | RAM48 |   |
| COM41                | Row41  | RAM41 | Row49  | RAM49 | Row41  | RAM49 | Row41  | RAM41 | Row49  | RAM49 | Row41  | RAM49 |   |
| COM42                | Row42  | RAM42 | Row50  | RAM50 | Row42  | RAM50 | Row42  | RAM42 | Row50  | RAM50 | Row42  | RAM50 |   |
| COM43                | Row43  | RAM43 | Row51  | RAM51 | Row43  | RAM51 | Row43  | RAM43 | Row51  | RAM51 | Row43  | RAM51 |   |
| COM44                | Row44  | RAM44 | Row52  | RAM52 | Row44  | RAM52 | Row44  | RAM44 | Row52  | RAM52 | Row44  | RAM52 |   |
| COM45                | Row45  | RAM45 | Row53  | RAM53 | Row45  | RAM53 | Row45  | RAM45 | Row53  | RAM53 | Row45  | RAM53 |   |
| COM46                | Row46  | RAM46 | Row54  | RAM54 | Row46  | RAM54 | Row46  | RAM46 | Row54  | RAM54 | Row46  | RAM54 |   |
| COM47                | Row47  | RAM47 | Row55  | RAM55 | Row47  | RAM55 | Row47  | RAM47 | Row55  | RAM55 | Row47  | RAM55 |   |
| COM48                | Row48  | RAM48 | Row56  | RAM56 | Row48  | RAM56 | Row48  | RAM48 | -      | -     | Row48  | RAM56 |   |
| COM49                | Row49  | RAM49 | Row57  | RAM57 | Row49  | RAM57 | Row49  | RAM49 | -      | -     | Row49  | RAM57 |   |
| COM50                | Row50  | RAM50 | Row58  | RAM58 | Row50  | RAM58 | Row50  | RAM50 | -      | -     | Row50  | RAM58 |   |
| COM51                | Row51  | RAM51 | Row59  | RAM59 | Row51  | RAM59 | Row51  | RAM51 | -      | -     | Row51  | RAM59 |   |
| COM52                | Row52  | RAM52 | Row60  | RAM60 | Row52  | RAM60 | Row52  | RAM52 | -      | -     | Row52  | RAM60 |   |
| COM53                | Row53  | RAM53 | Row61  | RAM61 | Row53  | RAM61 | Row53  | RAM53 | -      | -     | Row53  | RAM61 |   |
| COM54                | Row54  | RAM54 | Row62  | RAM62 | Row54  | RAM62 | Row54  | RAM54 | -      | -     | Row54  | RAM62 |   |
| COM55                | Row55  | RAM55 | Row63  | RAM63 | Row55  | RAM63 | Row55  | RAM55 | -      | -     | Row55  | RAM63 |   |
| COM56                | Row56  | RAM56 | Row0   | RAM0  | Row56  | RAM0  | -      | -     | Row0   | RAM0  | -      | -     |   |
| COM57                | Row57  | RAM57 | Row1   | RAM1  | Row57  | RAM1  | -      | -     | Row1   | RAM1  | -      | -     |   |
| COM58                | Row58  | RAM58 | Row2   | RAM2  | Row58  | RAM2  | -      | -     | Row2   | RAM2  | -      | -     |   |
| COM59                | Row59  | RAM59 | Row3   | RAM3  | Row59  | RAM3  | -      | -     | Row3   | RAM3  | -      | -     |   |
| COM60                | Row60  | RAM60 | Row4   | RAM4  | Row60  | RAM4  | -      | -     | Row4   | RAM4  | -      | -     |   |
| COM61                | Row61  | RAM61 | Row5   | RAM5  | Row61  | RAM5  | -      | -     | Row5   | RAM5  | -      | -     |   |
| COM62                | Row62  | RAM62 | Row6   | RAM6  | Row62  | RAM6  | -      | -     | Row6   | RAM6  | -      | -     |   |
| COM63                | Row63  | RAM63 | Row7   | RAM7  | Row63  | RAM7  | -      | -     | Row7   | RAM7  | -      | -     |   |
| Display examples     | (a)    |       | (b)    |       | (c)    |       | (d)    |       | (e)    |       | (f)    |       |   |



(a)



(b)



(c)



(d)



(e)



(f)



(RAM)

**Table 10-2 :Example of Set Display Offset and Display Start Line with Remap**

| Hardw are<br>pin name | Output |       |        |       |        |       |        |       |        |       |        |       |        |       |    |  | Set MUX ratio(A8h)<br>COM Normal / Remapped (C0h / C8h)<br>Display offset (D3h)<br>Display start line (40h - 7Fh) |
|-----------------------|--------|-------|--------|-------|--------|-------|--------|-------|--------|-------|--------|-------|--------|-------|----|--|---|
|                       | 64     |       | 64     |       | 64     |       | 48     |       | 48     |       | 48     |       | 48     |       |    |  |   |
|                       | Remap  |       | Remap  |       | Remap  |       | Remap  |       | Remap  |       | Remap  |       | Remap  |       |    |  |   |
|                       | 0      |       | 8      |       | 0      |       | 0      |       | 8      |       | 0      |       | 8      |       |    |  |   |
|                       | 0      |       | 0      |       | 8      |       | 0      |       | 8      |       | 0      |       | 8      |       | 16 |  |   |
| COM0                  | Row 63 | RAM63 | Row 7  | RAM7  | Row 63 | RAM7  | Row 47 | RAM47 | -      | -     | Row 47 | RAM55 | -      | -     |    |  |   |
| COM1                  | Row 62 | RAM62 | Row 6  | RAM6  | Row 62 | RAM6  | Row 46 | RAM46 | -      | -     | Row 46 | RAM54 | -      | -     |    |  |   |
| COM2                  | Row 61 | RAM61 | Row 5  | RAM5  | Row 61 | RAM5  | Row 45 | RAM45 | -      | -     | Row 45 | RAM53 | -      | -     |    |  |   |
| COM3                  | Row 60 | RAM60 | Row 4  | RAM4  | Row 60 | RAM4  | Row 44 | RAM44 | -      | -     | Row 44 | RAM52 | -      | -     |    |  |   |
| COM4                  | Row 59 | RAM59 | Row 3  | RAM3  | Row 59 | RAM3  | Row 43 | RAM43 | -      | -     | Row 43 | RAM51 | -      | -     |    |  |   |
| COM5                  | Row 58 | RAM58 | Row 2  | RAM2  | Row 58 | RAM2  | Row 42 | RAM42 | -      | -     | Row 42 | RAM50 | -      | -     |    |  |   |
| COM6                  | Row 57 | RAM57 | Row 1  | RAM1  | Row 57 | RAM1  | Row 41 | RAM41 | -      | -     | Row 41 | RAM49 | -      | -     |    |  |   |
| COM7                  | Row 56 | RAM56 | Row 0  | RAM0  | Row 56 | RAM0  | Row 40 | RAM40 | -      | -     | Row 40 | RAM48 | -      | -     |    |  |   |
| COM8                  | Row 55 | RAM55 | Row 63 | RAM63 | Row 55 | RAM63 | Row 39 | RAM39 | Row 47 | RAM47 | Row 39 | RAM47 | Row 47 | RAM63 |    |  |   |
| COM9                  | Row 54 | RAM54 | Row 62 | RAM62 | Row 54 | RAM62 | Row 38 | RAM38 | Row 46 | RAM46 | Row 38 | RAM46 | Row 46 | RAM62 |    |  |   |
| COM10                 | Row 53 | RAM53 | Row 61 | RAM61 | Row 53 | RAM61 | Row 37 | RAM37 | Row 45 | RAM45 | Row 37 | RAM45 | Row 45 | RAM61 |    |  |   |
| COM11                 | Row 52 | RAM52 | Row 60 | RAM60 | Row 52 | RAM60 | Row 36 | RAM36 | Row 44 | RAM44 | Row 36 | RAM44 | Row 44 | RAM60 |    |  |   |
| COM12                 | Row 51 | RAM51 | Row 59 | RAM59 | Row 51 | RAM59 | Row 35 | RAM35 | Row 43 | RAM43 | Row 35 | RAM43 | Row 43 | RAM59 |    |  |   |
| COM13                 | Row 50 | RAM50 | Row 58 | RAM58 | Row 50 | RAM58 | Row 34 | RAM34 | Row 42 | RAM42 | Row 34 | RAM42 | Row 42 | RAM58 |    |  |   |
| COM14                 | Row 49 | RAM49 | Row 57 | RAM57 | Row 49 | RAM57 | Row 33 | RAM33 | Row 41 | RAM41 | Row 33 | RAM41 | Row 41 | RAM57 |    |  |   |
| COM15                 | Row 48 | RAM48 | Row 56 | RAM56 | Row 48 | RAM56 | Row 32 | RAM32 | Row 40 | RAM40 | Row 32 | RAM40 | Row 40 | RAM56 |    |  |   |
| COM16                 | Row 47 | RAM47 | Row 55 | RAM55 | Row 47 | RAM55 | Row 31 | RAM31 | Row 39 | RAM39 | Row 31 | RAM39 | Row 39 | RAM55 |    |  |   |
| COM17                 | Row 46 | RAM46 | Row 54 | RAM54 | Row 46 | RAM54 | Row 30 | RAM30 | Row 38 | RAM38 | Row 30 | RAM38 | Row 38 | RAM54 |    |  |   |
| COM18                 | Row 45 | RAM45 | Row 53 | RAM53 | Row 45 | RAM53 | Row 29 | RAM29 | Row 37 | RAM37 | Row 29 | RAM37 | Row 37 | RAM53 |    |  |   |
| COM19                 | Row 44 | RAM44 | Row 52 | RAM52 | Row 44 | RAM52 | Row 28 | RAM28 | Row 36 | RAM36 | Row 28 | RAM36 | Row 36 | RAM52 |    |  |   |
| COM20                 | Row 43 | RAM43 | Row 51 | RAM51 | Row 43 | RAM51 | Row 27 | RAM27 | Row 35 | RAM35 | Row 27 | RAM35 | Row 35 | RAM51 |    |  |   |
| COM21                 | Row 42 | RAM42 | Row 50 | RAM50 | Row 42 | RAM50 | Row 26 | RAM26 | Row 34 | RAM34 | Row 26 | RAM34 | Row 34 | RAM50 |    |  |   |
| COM22                 | Row 41 | RAM41 | Row 49 | RAM49 | Row 41 | RAM49 | Row 25 | RAM25 | Row 33 | RAM33 | Row 25 | RAM33 | Row 33 | RAM49 |    |  |   |
| COM23                 | Row 40 | RAM40 | Row 48 | RAM48 | Row 40 | RAM48 | Row 24 | RAM24 | Row 32 | RAM32 | Row 24 | RAM32 | Row 32 | RAM48 |    |  |   |
| COM24                 | Row 39 | RAM39 | Row 47 | RAM47 | Row 39 | RAM47 | Row 23 | RAM23 | Row 31 | RAM31 | Row 23 | RAM31 | Row 31 | RAM47 |    |  |   |
| COM25                 | Row 38 | RAM38 | Row 46 | RAM46 | Row 38 | RAM46 | Row 22 | RAM22 | Row 30 | RAM30 | Row 22 | RAM30 | Row 30 | RAM46 |    |  |   |
| COM26                 | Row 37 | RAM37 | Row 45 | RAM45 | Row 37 | RAM45 | Row 21 | RAM21 | Row 29 | RAM29 | Row 21 | RAM29 | Row 29 | RAM45 |    |  |   |
| COM27                 | Row 36 | RAM36 | Row 44 | RAM44 | Row 36 | RAM44 | Row 20 | RAM20 | Row 28 | RAM28 | Row 20 | RAM28 | Row 28 | RAM44 |    |  |   |
| COM28                 | Row 35 | RAM35 | Row 43 | RAM43 | Row 35 | RAM43 | Row 19 | RAM19 | Row 27 | RAM27 | Row 19 | RAM27 | Row 27 | RAM43 |    |  |   |
| COM29                 | Row 34 | RAM34 | Row 42 | RAM42 | Row 34 | RAM42 | Row 18 | RAM18 | Row 26 | RAM26 | Row 18 | RAM26 | Row 26 | RAM42 |    |  |   |
| COM30                 | Row 33 | RAM33 | Row 41 | RAM41 | Row 33 | RAM41 | Row 17 | RAM17 | Row 25 | RAM25 | Row 17 | RAM25 | Row 25 | RAM41 |    |  |   |
| COM31                 | Row 32 | RAM32 | Row 40 | RAM40 | Row 32 | RAM40 | Row 16 | RAM16 | Row 24 | RAM24 | Row 16 | RAM24 | Row 24 | RAM40 |    |  |   |
| COM32                 | Row 31 | RAM31 | Row 39 | RAM39 | Row 31 | RAM39 | Row 15 | RAM15 | Row 23 | RAM23 | Row 15 | RAM23 | Row 23 | RAM39 |    |  |   |
| COM33                 | Row 30 | RAM30 | Row 38 | RAM38 | Row 30 | RAM38 | Row 14 | RAM14 | Row 22 | RAM22 | Row 14 | RAM22 | Row 22 | RAM38 |    |  |   |
| COM34                 | Row 29 | RAM29 | Row 37 | RAM37 | Row 29 | RAM37 | Row 13 | RAM13 | Row 21 | RAM21 | Row 13 | RAM21 | Row 21 | RAM37 |    |  |   |
| COM35                 | Row 28 | RAM28 | Row 36 | RAM36 | Row 28 | RAM36 | Row 12 | RAM12 | Row 20 | RAM20 | Row 12 | RAM20 | Row 20 | RAM36 |    |  |   |
| COM36                 | Row 27 | RAM27 | Row 35 | RAM35 | Row 27 | RAM35 | Row 11 | RAM11 | Row 19 | RAM19 | Row 11 | RAM19 | Row 19 | RAM35 |    |  |   |
| COM37                 | Row 26 | RAM26 | Row 34 | RAM34 | Row 26 | RAM34 | Row 10 | RAM10 | Row 18 | RAM18 | Row 10 | RAM18 | Row 18 | RAM34 |    |  |   |
| COM38                 | Row 25 | RAM25 | Row 33 | RAM33 | Row 25 | RAM33 | Row 9  | RAM9  | Row 17 | RAM17 | Row 9  | RAM17 | Row 17 | RAM33 |    |  |   |
| COM39                 | Row 24 | RAM24 | Row 32 | RAM32 | Row 24 | RAM32 | Row 8  | RAM8  | Row 16 | RAM16 | Row 8  | RAM16 | Row 16 | RAM32 |    |  |   |
| COM40                 | Row 23 | RAM23 | Row 31 | RAM31 | Row 23 | RAM31 | Row 7  | RAM7  | Row 15 | RAM15 | Row 7  | RAM15 | Row 15 | RAM31 |    |  |   |
| COM41                 | Row 22 | RAM22 | Row 30 | RAM30 | Row 22 | RAM30 | Row 6  | RAM6  | Row 14 | RAM14 | Row 6  | RAM14 | Row 14 | RAM30 |    |  |   |
| COM42                 | Row 21 | RAM21 | Row 29 | RAM29 | Row 21 | RAM29 | Row 5  | RAM5  | Row 13 | RAM13 | Row 5  | RAM13 | Row 13 | RAM29 |    |  |   |
| COM43                 | Row 20 | RAM20 | Row 28 | RAM28 | Row 20 | RAM28 | Row 4  | RAM4  | Row 12 | RAM12 | Row 4  | RAM12 | Row 12 | RAM28 |    |  |   |
| COM44                 | Row 19 | RAM19 | Row 27 | RAM27 | Row 19 | RAM27 | Row 3  | RAM3  | Row 11 | RAM11 | Row 3  | RAM11 | Row 11 | RAM27 |    |  |   |
| COM45                 | Row 18 | RAM18 | Row 26 | RAM26 | Row 18 | RAM26 | Row 2  | RAM2  | Row 10 | RAM10 | Row 2  | RAM10 | Row 10 | RAM26 |    |  |   |
| COM46                 | Row 17 | RAM17 | Row 25 | RAM25 | Row 17 | RAM25 | Row 1  | RAM1  | Row 9  | RAM9  | Row 1  | RAM9  | Row 9  | RAM25 |    |  |   |
| COM47                 | Row 16 | RAM16 | Row 24 | RAM24 | Row 16 | RAM24 | Row 0  | RAM0  | Row 8  | RAM8  | Row 0  | RAM8  | Row 8  | RAM24 |    |  |   |
| COM48                 | Row 15 | RAM15 | Row 23 | RAM23 | Row 15 | RAM23 | -      | -     | Row 7  | RAM7  | -      | -     | Row 7  | RAM23 |    |  |   |
| COM49                 | Row 14 | RAM14 | Row 22 | RAM22 | Row 14 | RAM22 | -      | -     | Row 6  | RAM6  | -      | -     | Row 6  | RAM22 |    |  |   |
| COM50                 | Row 13 | RAM13 | Row 21 | RAM21 | Row 13 | RAM21 | -      | -     | Row 5  | RAM5  | -      | -     | Row 5  | RAM21 |    |  |   |
| COM51                 | Row 12 | RAM12 | Row 20 | RAM20 | Row 12 | RAM20 | -      | -     | Row 4  | RAM4  | -      | -     | Row 4  | RAM20 |    |  |   |
| COM52                 | Row 11 | RAM11 | Row 19 | RAM19 | Row 11 | RAM19 | -      | -     | Row 3  | RAM3  | -      | -     | Row 3  | RAM19 |    |  |   |
| COM53                 | Row 10 | RAM10 | Row 18 | RAM18 | Row 10 | RAM18 | -      | -     | Row 2  | RAM2  | -      | -     | Row 2  | RAM18 |    |  |   |
| COM54                 | Row 9  | RAM9  | Row 17 | RAM17 | Row 9  | RAM17 | -      | -     | Row 1  | RAM1  | -      | -     | Row 1  | RAM17 |    |  |   |
| COM55                 | Row 8  | RAM8  | Row 16 | RAM16 | Row 8  | RAM16 | -      | -     | Row 0  | RAM0  | -      | -     | Row 0  | RAM16 |    |  |   |
| COM56                 | Row 7  | RAM7  | Row 15 | RAM15 | Row 7  | RAM15 | -      | -     | -      | -     | -      | -     | -      | -     |    |  |   |
| COM57                 | Row 6  | RAM6  | Row 14 | RAM14 | Row 6  | RAM14 | -      | -     | -      | -     | -      | -     | -      | -     |    |  |   |
| COM58                 | Row 5  | RAM5  | Row 13 | RAM13 | Row 5  | RAM13 | -      | -     | -      | -     | -      | -     | -      | -     |    |  |   |
| COM59                 | Row 4  | RAM4  | Row 12 | RAM12 | Row 4  | RAM12 | -      | -     | -      | -     | -      | -     | -      | -     |    |  |   |
| COM60                 | Row 3  | RAM3  | Row 11 | RAM11 | Row 3  | RAM11 | -      | -     | -      | -     | -      | -     | -      | -     |    |  |   |
| COM61                 | Row 2  | RAM2  | Row 10 | RAM10 | Row 2  | RAM10 | -      | -     | -      | -     | -      | -     | -      | -     |    |  |   |
| COM62                 | Row 1  | RAM1  | Row 9  | RAM9  | Row 1  | RAM9  | -      | -     | -      | -     | -      | -     | -      | -     |    |  |   |
| COM63                 | Row 0  | RAM0  | Row 8  | RAM8  | Row 0  | RAM8  | -      | -     | -      | -     | -      | -     | -      | -     |    |  |   |
| Display examples      | (a)    |       | (b)    |       | (c)    |       | (d)    |       | (e)    |       | (f)    |       | (g)    |       |    |  |   |



(a)



(b)



(c)



(d)



(e)



(f)



(g)




(RAM)

### 10.1.23 Set Display Clock Divide Ratio/ Oscillator Frequency (D5h)

This command consists of two functions:

- Display Clock Divide Ratio (D)(A[3:0])  
Set the divide ratio to generate DCLK (Display Clock) from CLK. The divide ratio is from 1 to 16, with reset value = 1. Please refer to section 8.3 for the details relationship of DCLK and CLK.
- Oscillator Frequency (A[7:4])  
Program the oscillator frequency Fosc that is the source of CLK if CLS pin is pulled high. The 4-bit value results in 16 different frequency settings available as shown below. The default setting is 0111b.

Figure 10-8 : Typical Oscillator frequency adjustment by D5 command ( $V_{DD} = 2.8V$ )

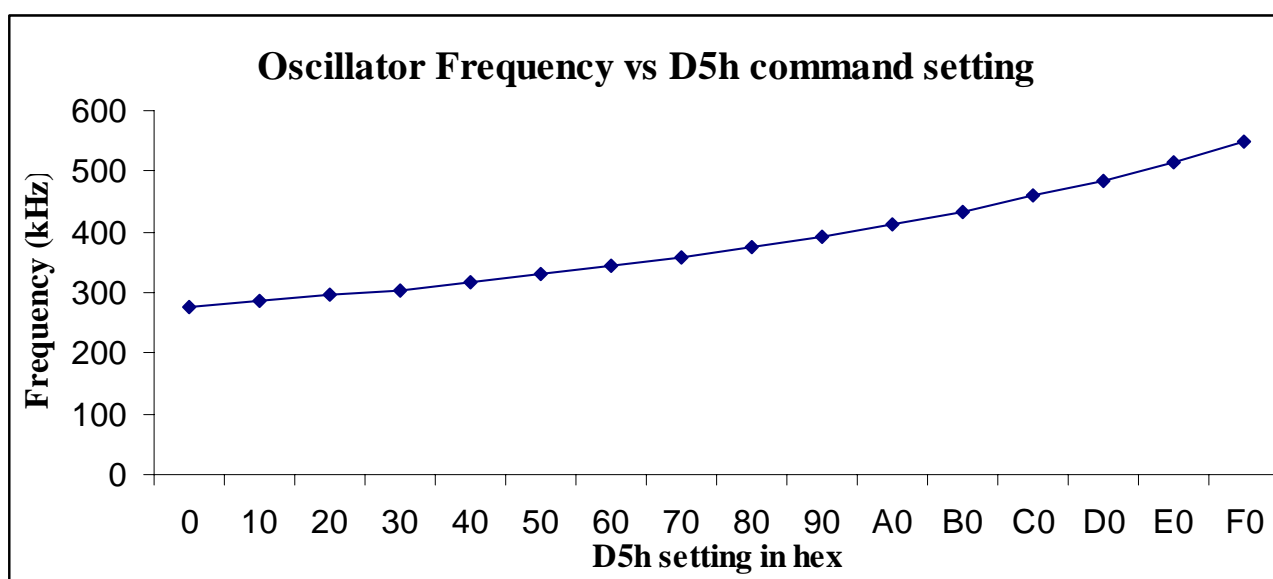

**Note**

<sup>(1)</sup> There is 10% tolerance in the above frequency values

### 10.1.24 Set Area Color Mode ON/OFF & Low Power Display Mode (D8h)

This command is used to enable area color mode. RESET is monochrome mode. The low power display mode can reduce power consumption during IC operation.

### 10.1.25 Set Pre-charge Period (D9h)




This command is used to set the duration of the pre-charge period. The interval is counted in number of DCLK, where RESET equals 2 DCLKs.

### 10.1.26 Set COM Pins Hardware Configuration (DAh)

This command sets the COM signals pin configuration to match the OLED panel hardware layout. The table below shows the COM pin configuration under different conditions (for MUX ratio =64):

**Table 10-3 : COM Pins Hardware Configuration**

| Conditions  | COM pins Configurations   |
|---|---|
| 1 Sequential COM pin configuration (DAh X[4] =0)<br>COM output Scan direction: from COM0 to COM63 (C0h)<br>Disable COM Left/Right remap (DAh X[5] =0) | <p>132 x 64</p> <p>SSD1305Z</p> <p>COM0, COM31, COM32, COM63</p> <p>Pad 1,2,3,...-&gt;126</p> <p>Gold Bumps face up</p> |
| 2 Sequential COM pin configuration (DAh X[4] =0)<br>COM output Scan direction: from COM0 to COM63 (C0h)<br>Enable COM Left/Right remap (DAh X[5] =1)  | <p>132 x 64</p> <p>SSD1305Z</p> <p>COM0, COM31, COM32, COM63</p> <p>Pad 1,2,3,...-&gt;126</p> <p>Gold Bumps face up</p> |
| 3 Sequential COM pin configuration (DAh X[4] =0)<br>COM output Scan direction: from COM63 to COM0 (C8h)<br>Disable COM Left/Right remap (DAh X[5] =0) | <p>132 x 64</p> <p>SSD1305Z</p> <p>COM0, COM31, COM32, COM63</p> <p>Pad 1,2,3,...-&gt;126</p> <p>Gold Bumps face up</p> |
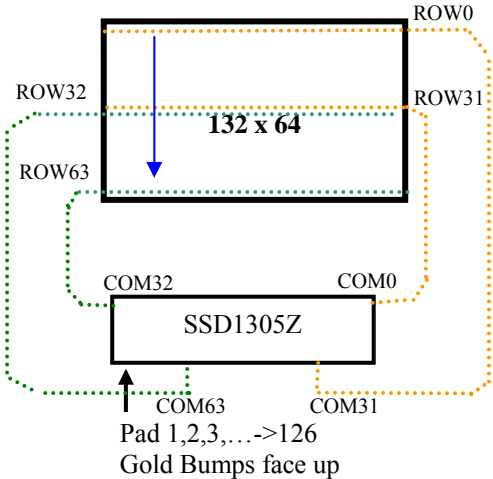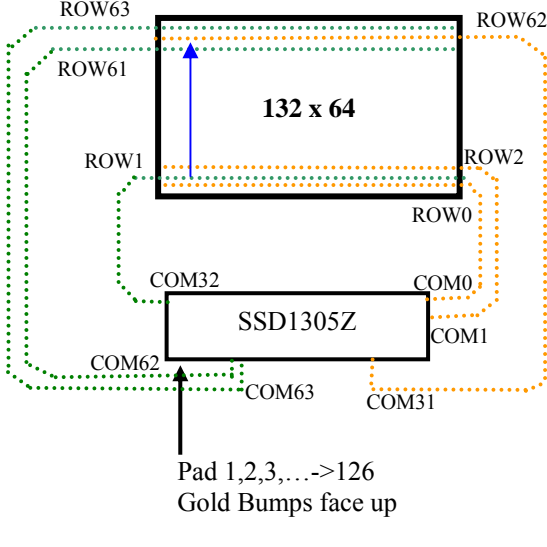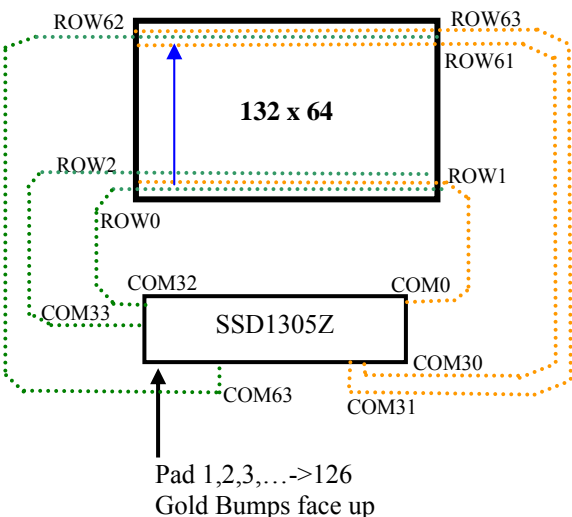
| Conditions  | COM pins Configurations  |
|---|--|
| <p>4 Sequential COM pin configuration (DAh X[4] =0)<br/>COM output Scan direction: from COM63 to COM0 (C8h)<br/>Enable COM Left/Right remap (DAh X[5] =1)</p>   |    |
| <p>5 Alternative COM pin configuration (DAh X[4] =1)<br/>COM output Scan direction: from COM0 to COM63 (C0h)<br/>Disable COM Left/Right remap (DAh X[5] =0)</p> |   |
| <p>6 Alternative COM pin configuration (DAh X[4] =1)<br/>COM output Scan direction: from COM0 to COM63 (C0h)<br/>Enable COM Left/Right remap (DAh X[5] =1)</p>  |  |

| Conditions  | COM pins Configurations |
|---|-------------------------|
| 7 Alternative COM pin configuration (DAh X[4] =1)<br>COM output Scan direction: from COM63 to COM0(C8h)<br>Disable COM Left/Right remap (DAh X[5] =0) |                         |
| 8 Alternative COM pin configuration (DAh X[4] =1)<br>COM output Scan direction: from COM63 to COM0(C8h)<br>Enable COM Left/Right remap (DAh X[5] =1)  |                         |

### 10.1.27 Set $V_{COMH}$ Deselect Level (DBh)

This command adjusts the  $V_{COMH}$  regulator output.

### 10.1.28 Enter Read Modify Write (E0h)

This single byte command is used to enter the Read Modify Write mode.

During the Read Modify Write mode:








The RAM address pointer will not be incremented when there is data read.

The RAM address pointer will be increased by one automatically after each data write.

After exit the Read Modify Write Mode by command EEh, the RAM address pointer returns back to the original location before enter the Read Modify Write mode.

For instance, when reading the data from the RAM and re-writing a new data to the same location, there is no need to re-enter the column and page addresses again under this mode.

**Table 10-4 : Example of Read Modify Write Mode**

| Condition  | RAM & address pointer (under Horizontal addressing mode)                            |
|--|---|
| Originally, Address Pointer point to address A                                   |    |
| <b>Enter Read Modify Write Mode by command E0h</b>                               |   |
| Data read : address pointer does not change                                      |    |
| Data Write: address pointer increases by one automatically after each data write |    |
| Data Write: address pointer increases by one automatically after each data write |    |
| Data read : address pointer does not change                                      |    |
| Data Write: address pointer increases by one automatically after each data write |   |
| <b>Exit Read Modify Write Mode by command EEh</b>                                |   |
| Address Pointer point to address A after exit Read Modify Write Mode             |  |

### 10.1.29 NOP (E3h)

No Operation Command

### 10.1.30 Exit Read Modify Write (EEh)

This single byte command is used to exit the Read Modify Write mode (Please refer to Section 10.1.28. for details of the Read Modify Write Mode).

### 10.1.31 Status register Read

This command is issued by setting D/C# ON LOW during a data read (See Figure 13-1 to Figure 13-3 for parallel interface waveform). It allows the MCU to monitor the internal status of the chip. No status read is provided for serial mode.



## 10.2 Graphic Acceleration Command

### 10.2.1 Horizontal Scroll Setup (26h/27h)

This command consists of 5 consecutive bytes to set up the horizontal scroll parameters and determines the scrolling start page, end page and scrolling speed.

Before issuing this command the horizontal scroll must be deactivated (2Eh). Otherwise, RAM content may be corrupted.

The SSD1305 horizontal scroll is designed for 132 columns scrolling. The following three figures (Figure 10-9, Figure 10-10, Figure 10-11) show the examples of using the horizontal scroll:


**Figure 10-9 : Horizontal scroll example: Scroll RIGHT by 4 columns**

|                       |        |        |        |        |      |      |     |     |     |        |        |        |        |        |        |
|-----------------------|--------|--------|--------|--------|------|------|-----|-----|-----|--------|--------|--------|--------|--------|--------|
| Original Setting      | SEG0   | SEG1   | SEG2   | SEG3   | SEG4 | SEG5 | ... | ... | ... | SEG126 | SEG127 | SEG128 | SEG129 | SEG130 | SEG131 |
| After one scroll step | SEG128 | SEG129 | SEG130 | SEG131 | SEG0 | SEG1 | ... | ... | ... | SEG122 | SEG123 | SEG124 | SEG125 | SEG126 | SEG127 |

**Figure 10-10 : Horizontal scroll example: Scroll LEFT by 2 columns**

|                       |      |      |      |      |      |      |     |     |     |        |        |        |        |        |        |
|-----------------------|------|------|------|------|------|------|-----|-----|-----|--------|--------|--------|--------|--------|--------|
| Original Setting      | SEG0 | SEG1 | SEG2 | SEG3 | SEG4 | SEG5 | ... | ... | ... | SEG126 | SEG127 | SEG128 | SEG129 | SEG130 | SEG131 |
| After one scroll step | SEG2 | SEG3 | SEG4 | SEG5 | SEG6 | SEG7 | ... | ... | ... | SEG128 | SEG129 | SEG130 | SEG131 | SEG0   | SEG1   |

**Figure 10-11 : Horizontal scrolling setup example**

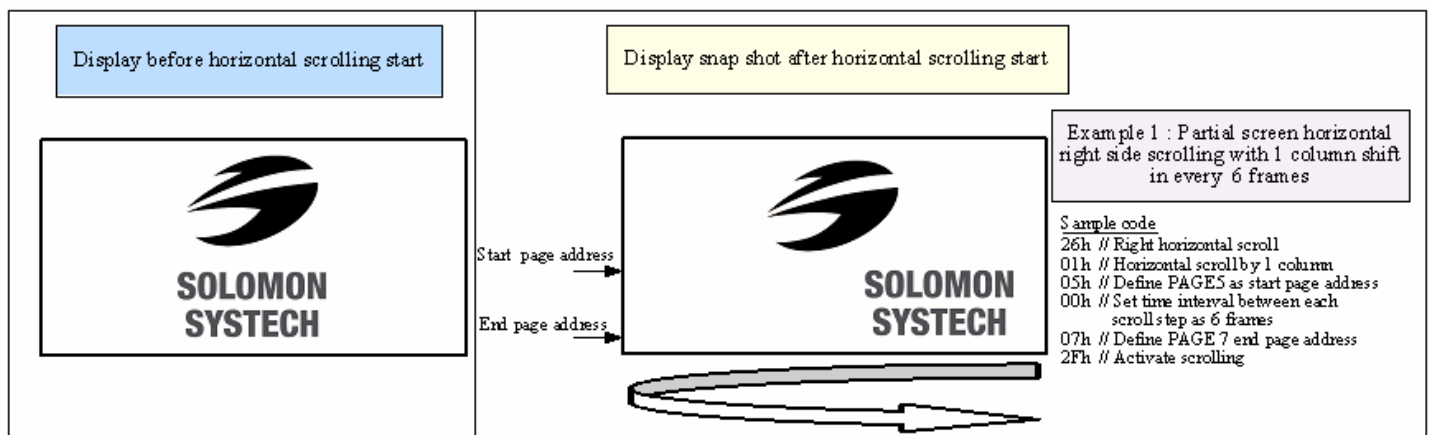


## 10.2.2 Continuous Vertical and Horizontal Scroll Setup (29h/2Ah)

This command consists of 6 consecutive bytes to set up the continuous vertical and horizontal scroll parameters and determines the scrolling start page, end page, scrolling speed and vertical scrolling offset.

The bytes A[2:0], B[2:0], C[2:0] and D[2:0] of command 29h/2Ah are for the setting of the continuous horizontal scrolling. The byte E[5:0] is for the setting of the continuous vertical scrolling offset. All these bytes together are for the setting of continuous diagonal (horizontal + vertical) scrolling. If the vertical scrolling offset byte E[5:0] is set to zero, then only horizontal scrolling is performed (like command 26/27h). Alternatively, if the byte A[2:0] is set to zero and E[5:0] is not set to zero, then only vertical scrolling is performed.


Before issuing this command the scroll must be deactivated (2Eh). Otherwise, RAM content may be corrupted. The following two figures (Figure 10-12 , Figure 10-13) show the examples of using the continuous vertical and horizontal scroll:

**Figure 10-12 : Continuous Vertical and Horizontal scrolling setup examples**

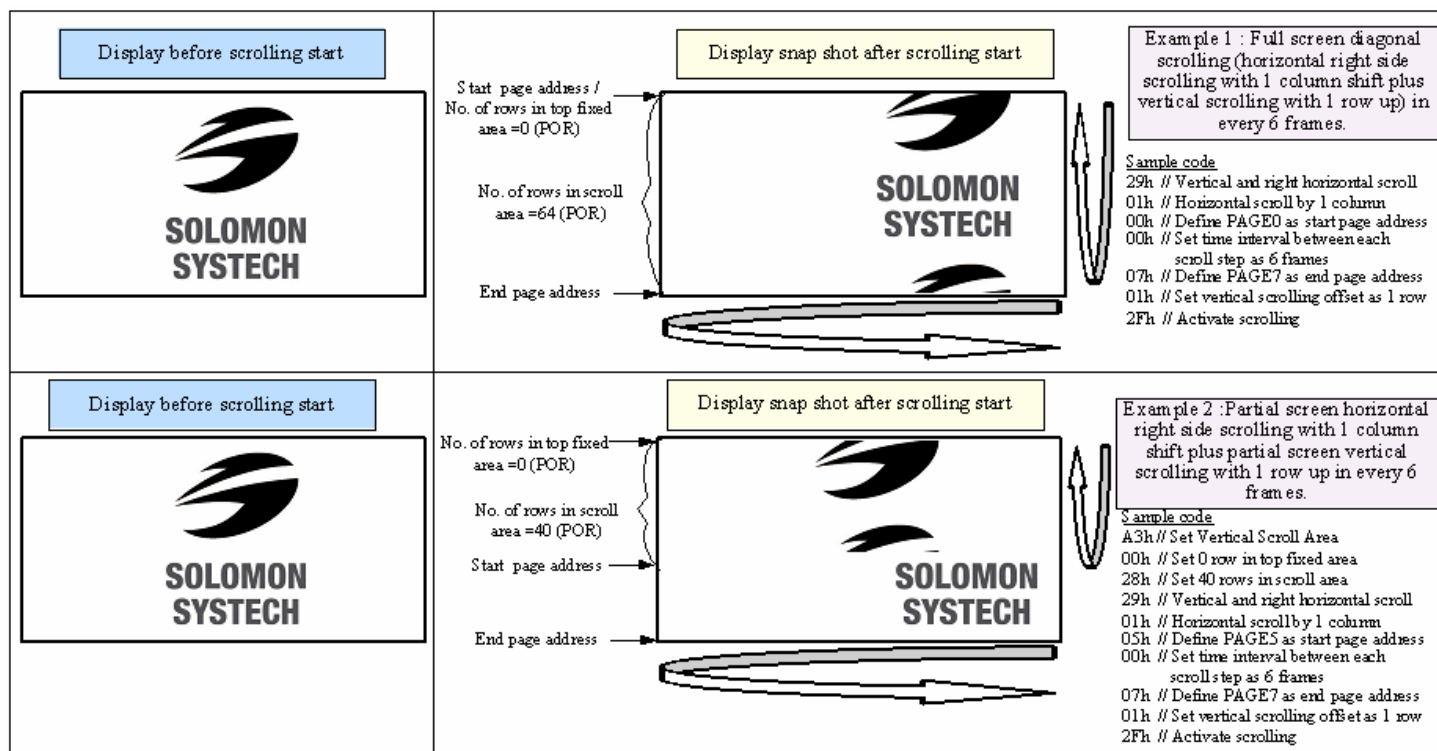

**Figure 10-13 : Continuous Vertical and Horizontal scrolling example: With setting in MUX ratio**

As shown in Figure 10-13, the whole RAM content is displayed during scrolling regardless of the MUX ratio.

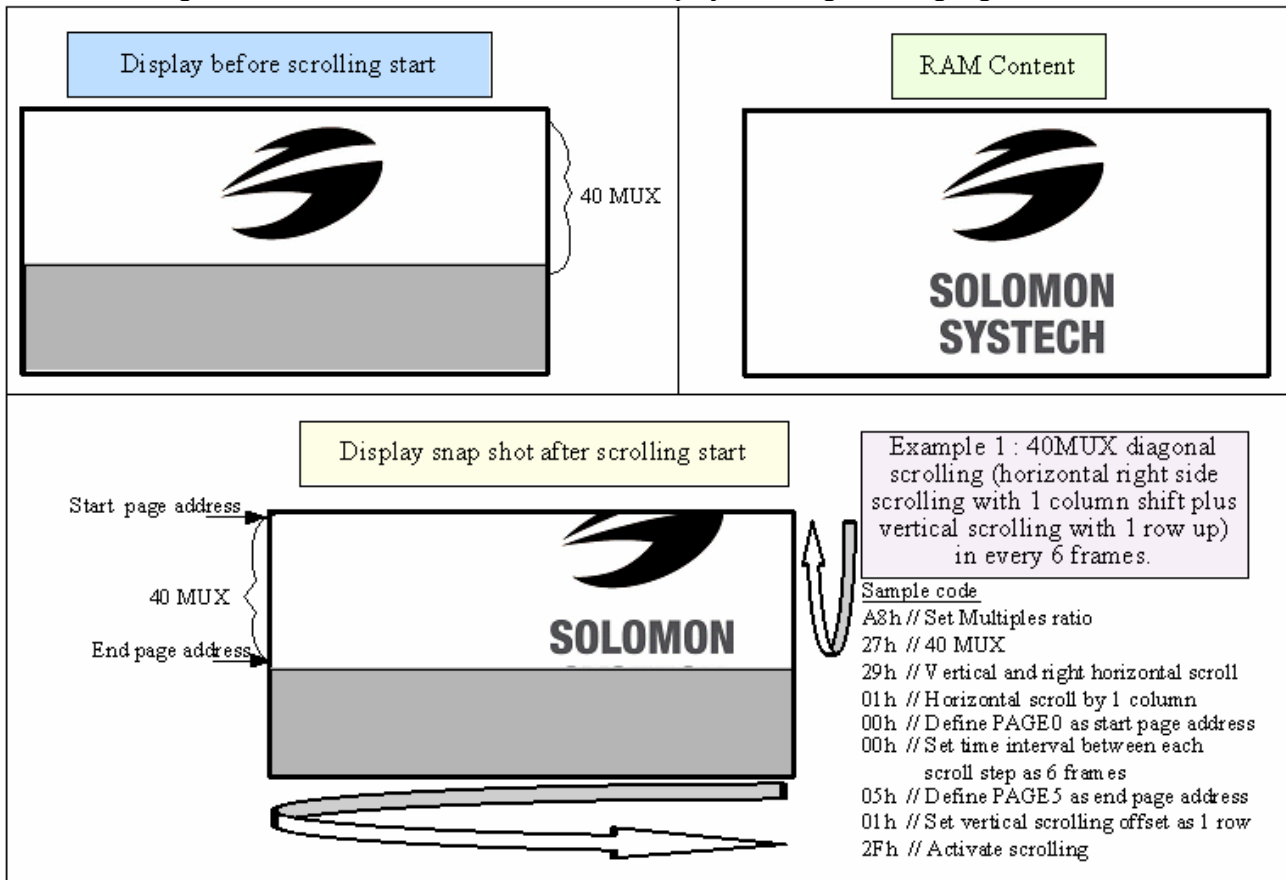

### 10.2.3 Deactivate Scroll (2Eh)

This command stops the motion of scrolling. After sending 2Eh command to deactivate the scrolling action, the ram data needs to be rewritten.

### 10.2.4 Activate Scroll (2Fh)

This command starts the motion of scrolling and should only be issued after the scroll setup parameters have been defined by the scrolling setup commands :26h/27h/29h/2Ah . The setting in the last scrolling setup command overwrites the setting in the previous scrolling setup commands.





The following actions are prohibited after the scrolling is activated

1. RAM access (Data write or read)
2. Changing the horizontal scroll setup parameters

## 10.2.5 Set Vertical Scroll Area(A3h)

This command consists of 3 consecutive bytes to set up the vertical scroll area. For the continuous vertical scroll function (command 29/2Ah), the number of rows that in vertical scrolling can be set smaller or equal to the MUX ratio. Figure 10-14 shows some vertical scrolling example with different settings in vertical scroll area.

Figure 10-14 : Vertical scroll area setup examples

| Display before vertical scrolling start  | Display snap shot after vertical scrolling start                                 |  |
|--|--|--|
|    | No. of rows in top fixed area = 0 (POR)<br>No. of rows in scroll area = 64 (POR) | <b>Example 1 : Full screen vertical scrolling with 1 row up in every 6 frames</b><br><b>Sample code</b><br>29h // Vertical and right horizontal scroll<br>00h // No horizontal scroll<br>00h // Dummy byte for start page address<br>00h // Set time interval between each scroll step as 6 frames<br>00h // Dummy byte for end page address<br>01h // Set vertical scrolling offset as 1 row<br>2Fh // Activate scrolling   |
|   | No. of rows in top fixed area = 0<br>No. of rows in scroll area = 40             | <b>Example 2 : Partial screen (top area) vertical scrolling with 1 row up in every 32 frames</b><br><b>Sample code</b><br>A3h // Set Vertical Scroll Area<br>00h // Set 0 row in top fixed area<br>28h // Set 40 rows in scroll area<br>29h // Vertical and right horizontal scroll<br>00h // No horizontal scroll<br>00h // Dummy byte for start page address<br>01h // Set time interval between each scroll step as 32 frames<br>00h // Dummy byte for end page address<br>01h // Set vertical scrolling offset as 1 row<br>2Fh // Activate scrolling     |
|  | No. of rows in top fixed area = 40<br>No. of rows in scroll area = 24            | <b>Example 3 : Partial screen (bottom area) vertical scrolling with 1 row up in every 6 frames</b><br><b>Sample code</b><br>A3h // Set Vertical Scroll Area<br>28h // Set 40 rows in top fixed area<br>18h // Set 24 rows in scroll area<br>29h // Vertical and right horizontal scroll<br>00h // No horizontal scroll<br>00h // Dummy byte for start page address<br>00h // Set time interval between each scroll step as 6 frames<br>00h // Dummy byte for end page address<br>01h // Set vertical scrolling offset as 1 row<br>2Fh // Activate scrolling  |
|  | No. of rows in top fixed area = 32<br>No. of rows in scroll area = 24            | <b>Example 4 : Partial screen (central area) vertical scrolling with 1 row up in every 3 frames</b><br><b>Sample code</b><br>A3h // Set Vertical Scroll Area<br>20h // Set 32 rows in top fixed area<br>18h // Set 24 rows in scroll area<br>29h // Vertical and right horizontal scroll<br>00h // No horizontal scroll<br>00h // Dummy byte for start page address<br>04h // Set time interval between each scroll step as 3 frames<br>00h // Dummy byte for end page address<br>01h // Set vertical scrolling offset as 1 row<br>2Fh // Activate scrolling |

## 11 MAXIMUM RATINGS

**Table 11-1 : Maximum Ratings (Voltage Referenced to  $V_{SS}$ )**

| Symbol     | Parameter                 | Value                        | Unit |
|------------|---------------------------|------------------------------|------|
| $V_{DD}$   | Supply Voltage            | -0.3 to +4                   | V    |
| $V_{DDIO}$ |                           | -0.3 to $V_{DD}+0.5$         | V    |
| $V_{CC}$   |                           | 0 to 16                      | V    |
| $V_{SEG}$  | SEG output voltage        | 0 to $V_{CC}$                | V    |
| $V_{COM}$  | COM output voltage        | 0 to $0.9 \cdot V_{CC}$      | V    |
| $V_{in}$   | Input voltage             | $V_{SS}-0.3$ to $V_{DD}+0.3$ | V    |
| $T_A$      | Operating Temperature     | -40 to +85                   | °C   |
| $T_{stg}$  | Storage Temperature Range | -65 to +150                  | °C   |

Maximum ratings are those values beyond which damages to the device may occur. Functional operation should be restricted to the limits in the Electrical Characteristics tables or Pin Description section

This device may be light sensitive. Caution should be taken to avoid exposure of this device to any light source during normal operation. This device is not radiation protected.

## 12 DC CHARACTERISTICS

### Condition (Unless otherwise specified):

Voltage referenced to  $V_{SS}$

$V_{DD} = 2.4$  to  $3.5V$

$T_A = 25^{\circ}C$

Table 12-1 : DC Characteristics

| Symbol            | Parameter  | Test Condition  | Min                   | Typ | Max                   | Unit    |
|-------------------|--|---|-----------------------|-----|-----------------------|---------|
| $V_{CC}$          | Operating Voltage  | -   | 7                     | -   | 15                    | V       |
| $V_{DD}$          | Logic Supply Voltage   | -   | 2.4                   | -   | 3.5                   | V       |
| $V_{DDIO}$        | Logic Supply Voltage for MCU interface   | -   | 1.6                   | -   | $V_{DD}$              | V       |
| $V_{OH}$          | High Logic Output Level  | $I_{OUT} = 100\mu A, 3.3MHz$  | $0.9 \times V_{DDIO}$ | -   | -                     | V       |
| $V_{OL}$          | Low Logic Output Level   | $I_{OUT} = 100\mu A, 3.3MHz$  | -                     | -   | $0.1 \times V_{DDIO}$ | V       |
| $V_{IH}$          | High Logic Input Level   | -   | $0.8 \times V_{DDIO}$ | -   | -                     | V       |
| $V_{IL}$          | Low Logic Input Level  | -   | -                     | -   | $0.2 \times V_{DDIO}$ | V       |
| $I_{CC, SLEEP}$   | $I_{CC}$ Sleep mode Current  | $V_{DDIO} = 1.6V \sim 3.3V, V_{DD} = 2.4V \sim 3.5V,$<br>$V_{CC} = 7V \sim 15V$<br>Display OFF, No panel attached                           | -                     | -   | 10                    | $\mu A$ |
| $I_{DD, SLEEP}$   | $I_{DD}$ Sleep mode Current  | $V_{DDIO} = 1.6V \sim 3.3V, V_{DD} = 2.4V \sim 3.5V,$<br>$V_{CC} = 7V \sim 15V$<br>Display OFF, No panel attached                           | -                     | -   | 10                    | $\mu A$ |
| $I_{DDIO, SLEEP}$ | $I_{DDIO}$ Sleep mode Current  | $V_{DDIO} = 1.6V \sim 3.3V, V_{DD} = 2.4V \sim 3.5V,$<br>$V_{CC} = 7V \sim 15V$<br>Display OFF, No panel attached                           | -                     | -   | 10                    | $\mu A$ |
| $I_{CC}$          | $V_{CC}$ Supply Current<br>$V_{DD} = 2.7V, V_{CC} = 12V,$<br>$I_{REF} = 10\mu A$<br>No loading, Display ON, All ON | Contrast = FFh  | -                     | 550 | 1000                  | $\mu A$ |
| $I_{DD}$          | $V_{DD}$ Supply Current<br>$V_{DD} = 2.7V, V_{CC} = 12V,$<br>$I_{REF} = 10\mu A$<br>No loading, Display ON, All ON |   | -                     | 100 | 300                   | $\mu A$ |
| $I_{SEG}$         | Segment Output Current<br><br>$V_{DD} = 2.7V, V_{CC} = 12V,$<br>$I_{REF} = 10\mu A, \text{Display ON.}$            | Contrast=FFh  | 294                   | 320 | 346                   | $\mu A$ |
|                   |  | Contrast=AFh  | -                     | 220 | -                     |         |
|                   |  | Contrast=7Fh  | -                     | 159 | -                     |         |
|                   |  | Contrast=3Fh  | -                     | 79  | -                     |         |
|                   |  | Contrast=0Fh  | -                     | 19  | -                     |         |
| Dev               | Segment output current uniformity  | $Dev = (I_{SEG} - I_{MID}) / I_{MID}$<br>$I_{MID} = (I_{MAX} + I_{MIN}) / 2$<br>$I_{SEG}[0:131] = \text{Segment current at contrast} = FFh$ | -3                    | -   | +3                    | %       |
| Adj. Dev          | Adjacent pin output current uniformity (contrast = FF)   | $Adj\ Dev = (I[n] - I[n+1]) / (I[n] + I[n+1])$  | -2                    | -   | +2                    | %       |

## 13 AC CHARACTERISTICS

### Conditions:

Voltage referenced to  $V_{SS}$

$V_{DD}=2.4$  to  $3.5V$

$T_A = 25^{\circ}C$

**Table 13-1 : AC Characteristics**

| Symbol              | Parameter   | Test Condition   | Min | Typ  | Max | Unit |
|---------------------|---|--|-----|--|-----|------|
| FOSC <sup>(1)</sup> | Oscillation Frequency of Display Timing Generator | $V_{DD} = 2.8V$  | 324 | 360  | 396 | kHz  |
| FFRM                | Frame Frequency for 64 MUX Mode                   | 132x64 Graphic Display Mode, Display ON, Internal Oscillator Enabled | -   | $F_{OSC} \times 1/(D \times K \times 64)$ <sup>(2)</sup> | -   | Hz   |
| RES#                | Reset low pulse width                             |  | 3   | -  | -   | us   |

### Note

<sup>(1)</sup> FOSC stands for the frequency value of the internal oscillator and the value is measured when command D5h A[7:4] is in default value.

<sup>(2)</sup> D: divide ratio (default value = 1)

K: number of display clocks (default value = 54)


Please refer to Table 9-1 (Set Display Clock Divide Ratio/Oscillator Frequency, D5h) for detailed description

**Table 13-2 : 6800-Series MCU Parallel Interface Timing Characteristics**

( $V_{DD} - V_{SS} = 2.4V$  to  $3.5V$ ,  $V_{DDIO} = V_{DD}$ ,  $T_A = 25^{\circ}C$ )

| Symbol      | Parameter   | Min       | Typ | Max | Unit |
|-------------|---|-----------|-----|-----|------|
| $t_{cycle}$ | Clock Cycle Time  | 300       | -   | -   | ns   |
| $t_{AS}$    | Address Setup Time  | 0         | -   | -   | ns   |
| $t_{AH}$    | Address Hold Time   | 0         | -   | -   | ns   |
| $t_{DSW}$   | Write Data Setup Time   | 40        | -   | -   | ns   |
| $t_{DHW}$   | Write Data Hold Time  | 7         | -   | -   | ns   |
| $t_{DHR}$   | Read Data Hold Time   | 20        | -   | -   | ns   |
| $t_{OH}$    | Output Disable Time   | -         | -   | 70  | ns   |
| $t_{ACC}$   | Access Time   | -         | -   | 140 | ns   |
| $PW_{CSL}$  | Chip Select Low Pulse Width (read)<br>Chip Select Low Pulse Width (write)   | 120<br>60 | -   | -   | ns   |
| $PW_{CSH}$  | Chip Select High Pulse Width (read)<br>Chip Select High Pulse Width (write) | 60<br>60  | -   | -   | ns   |
| $t_R$       | Rise Time   | -         | -   | 40  | ns   |
| $t_F$       | Fall Time   | -         | -   | 40  | ns   |

**Figure 13-1 : 6800-series MCU parallel interface characteristics**

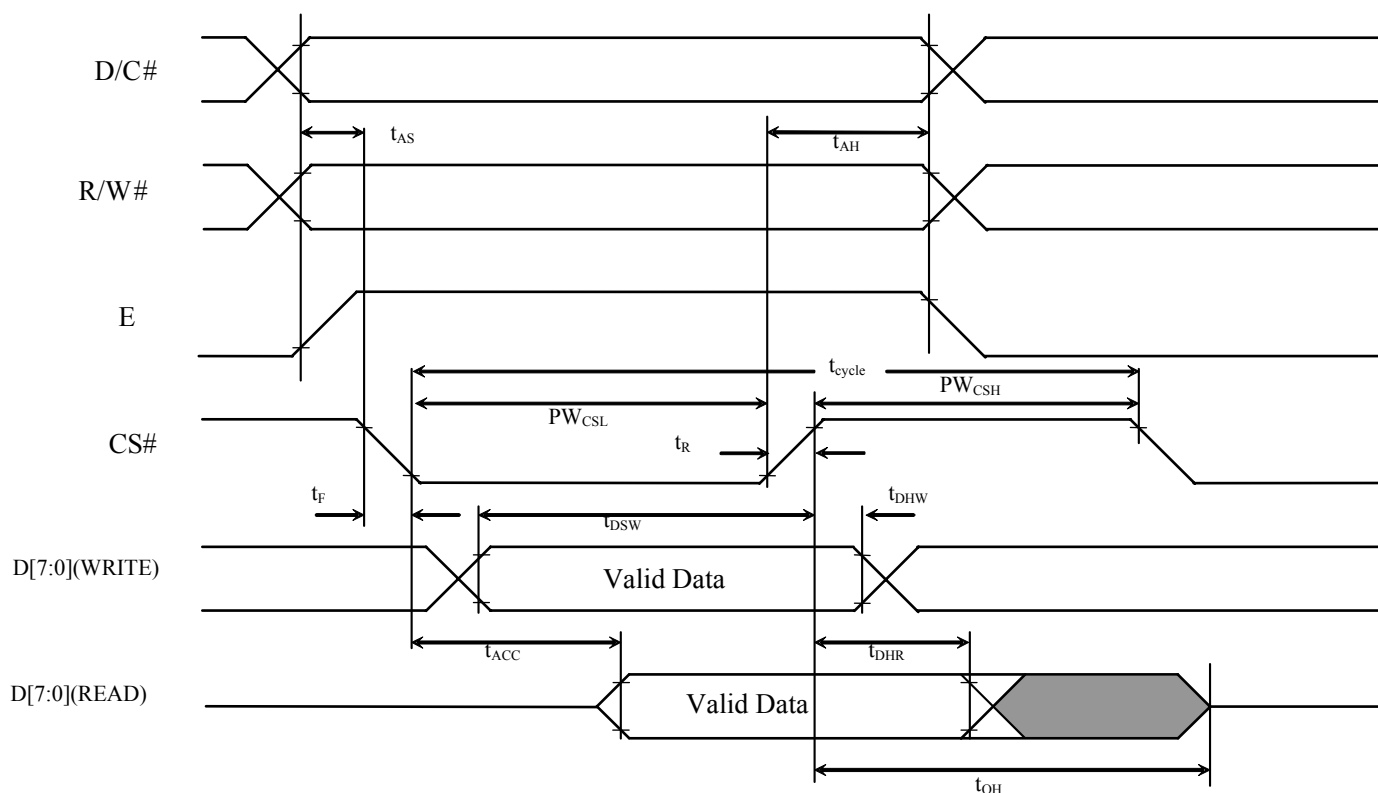




**Table 13-3 : 8080-Series MCU Parallel Interface Timing Characteristics**


( $V_{DD} - V_{SS} = 2.4V$  to  $3.5V$ ,  $V_{DDIO} = V_{DD}$ ,  $T_A = 25^\circ C$ )

| Symbol     | Parameter                            | Min | Typ | Max | Unit |
|------------|--------------------------------------|-----|-----|-----|------|
| $t_{cclk}$ | Clock Cycle Time                     | 300 | -   | -   | ns   |
| $t_{AS}$   | Address Setup Time                   | 10  | -   | -   | ns   |
| $t_{AH}$   | Address Hold Time                    | 0   | -   | -   | ns   |
| $t_{DSW}$  | Write Data Setup Time                | 40  | -   | -   | ns   |
| $t_{DHW}$  | Write Data Hold Time                 | 7   | -   | -   | ns   |
| $t_{DHR}$  | Read Data Hold Time                  | 20  | -   | -   | ns   |
| $t_{OH}$   | Output Disable Time                  | -   | -   | 70  | ns   |
| $t_{ACC}$  | Access Time                          | -   | -   | 140 | ns   |
| $t_{PWLr}$ | Read Low Time                        | 120 | -   | -   | ns   |
| $t_{PWLw}$ | Write Low Time                       | 60  | -   | -   | ns   |
| $t_{PWHr}$ | Read High Time                       | 60  | -   | -   | ns   |
| $t_{PWHw}$ | Write High Time                      | 60  | -   | -   | ns   |
| $t_R$      | Rise Time                            | -   | -   | 40  | ns   |
| $t_F$      | Fall Time                            | -   | -   | 40  | ns   |
| $t_{CS}$   | Chip select setup time               | 0   | -   | -   | ns   |
| $t_{CSH}$  | Chip select hold time to read signal | 0   | -   | -   | ns   |
| $t_{CSF}$  | Chip select hold time                | 20  | -   | -   | ns   |

**Figure 13-2 : 8080-series parallel interface characteristics (Form 1)**

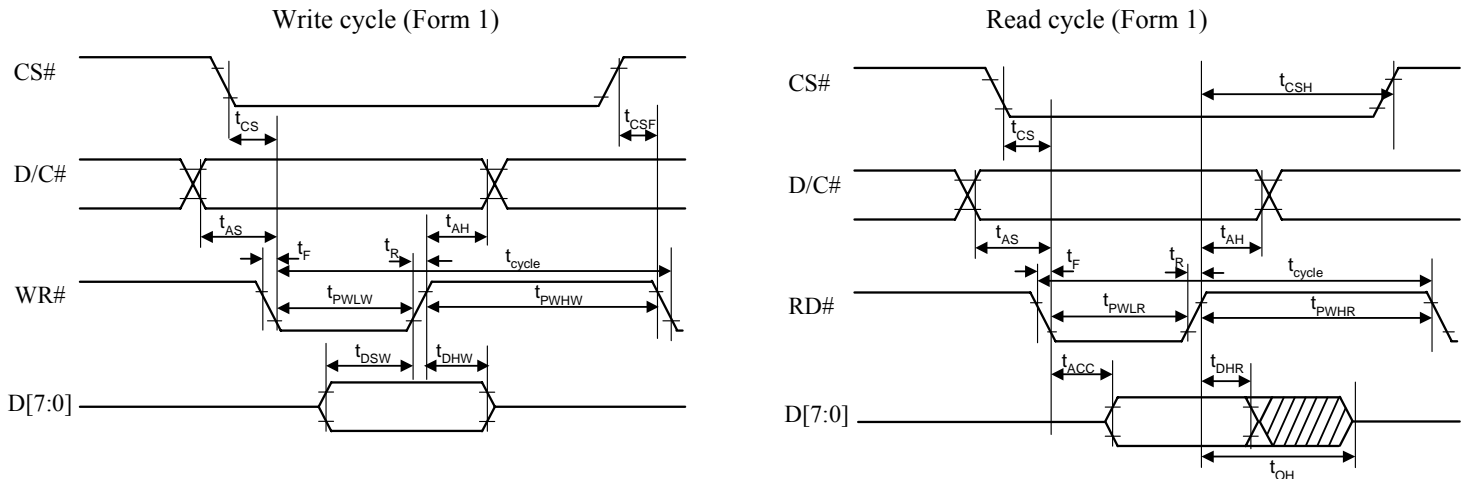

**Figure 13-3 : 8080-series parallel interface characteristics (Form 2)**

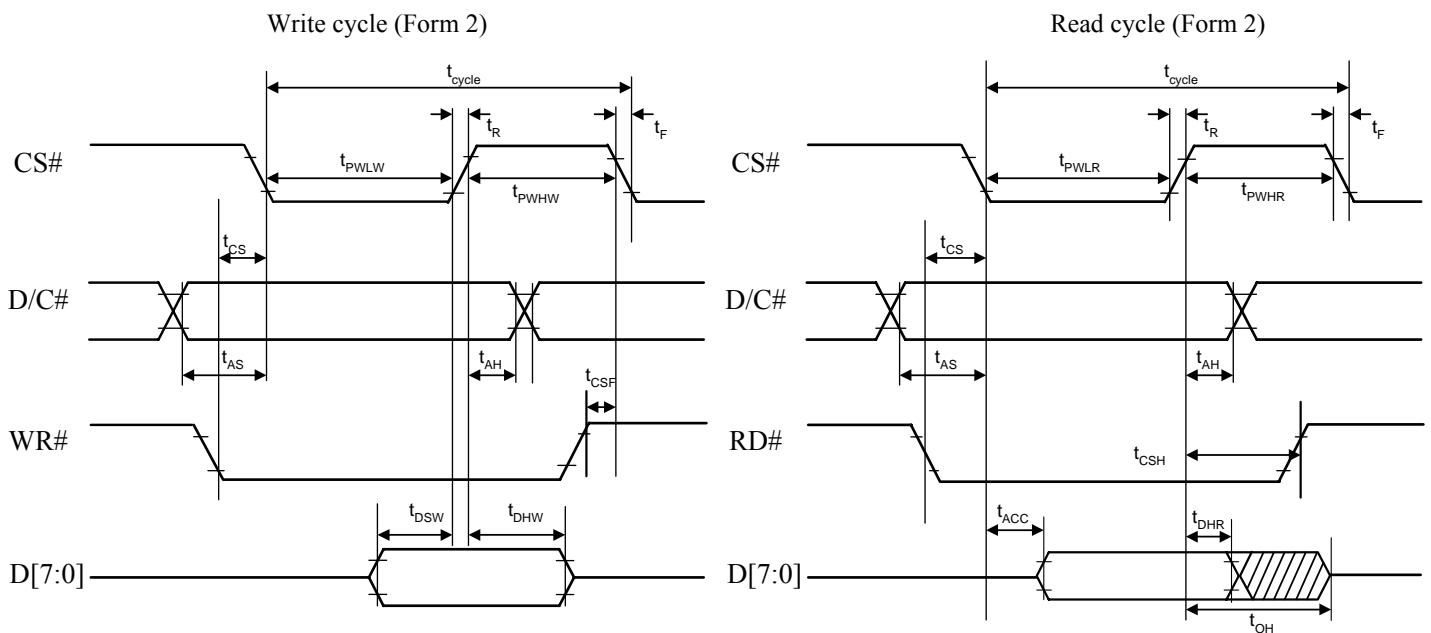


**Table 13-4 : Serial Interface Timing Characteristics**

( $V_{DD} - V_{SS} = 2.4V$  to  $3.5V$ ,  $V_{DDIO} = V_{DD}$ ,  $T_A = 25^\circ C$ )

| Symbol      | Parameter              | Min | Typ | Max | Unit |
|-------------|------------------------|-----|-----|-----|------|
| $t_{cycle}$ | Clock Cycle Time       | 250 | -   | -   | ns   |
| $t_{AS}$    | Address Setup Time     | 150 | -   | -   | ns   |
| $t_{AH}$    | Address Hold Time      | 150 | -   | -   | ns   |
| $t_{CSS}$   | Chip Select Setup Time | 120 | -   | -   | ns   |
| $t_{CSH}$   | Chip Select Hold Time  | 60  | -   | -   | ns   |
| $t_{DSW}$   | Write Data Setup Time  | 50  | -   | -   | ns   |
| $t_{DHW}$   | Write Data Hold Time   | 15  | -   | -   | ns   |
| $t_{CLKL}$  | Clock Low Time         | 100 | -   | -   | ns   |
| $t_{CLKH}$  | Clock High Time        | 100 | -   | -   | ns   |
| $t_R$       | Rise Time              | -   | -   | 40  | ns   |
| $t_F$       | Fall Time              | -   | -   | 40  | ns   |

**Figure 13-4 : Serial interface characteristics**

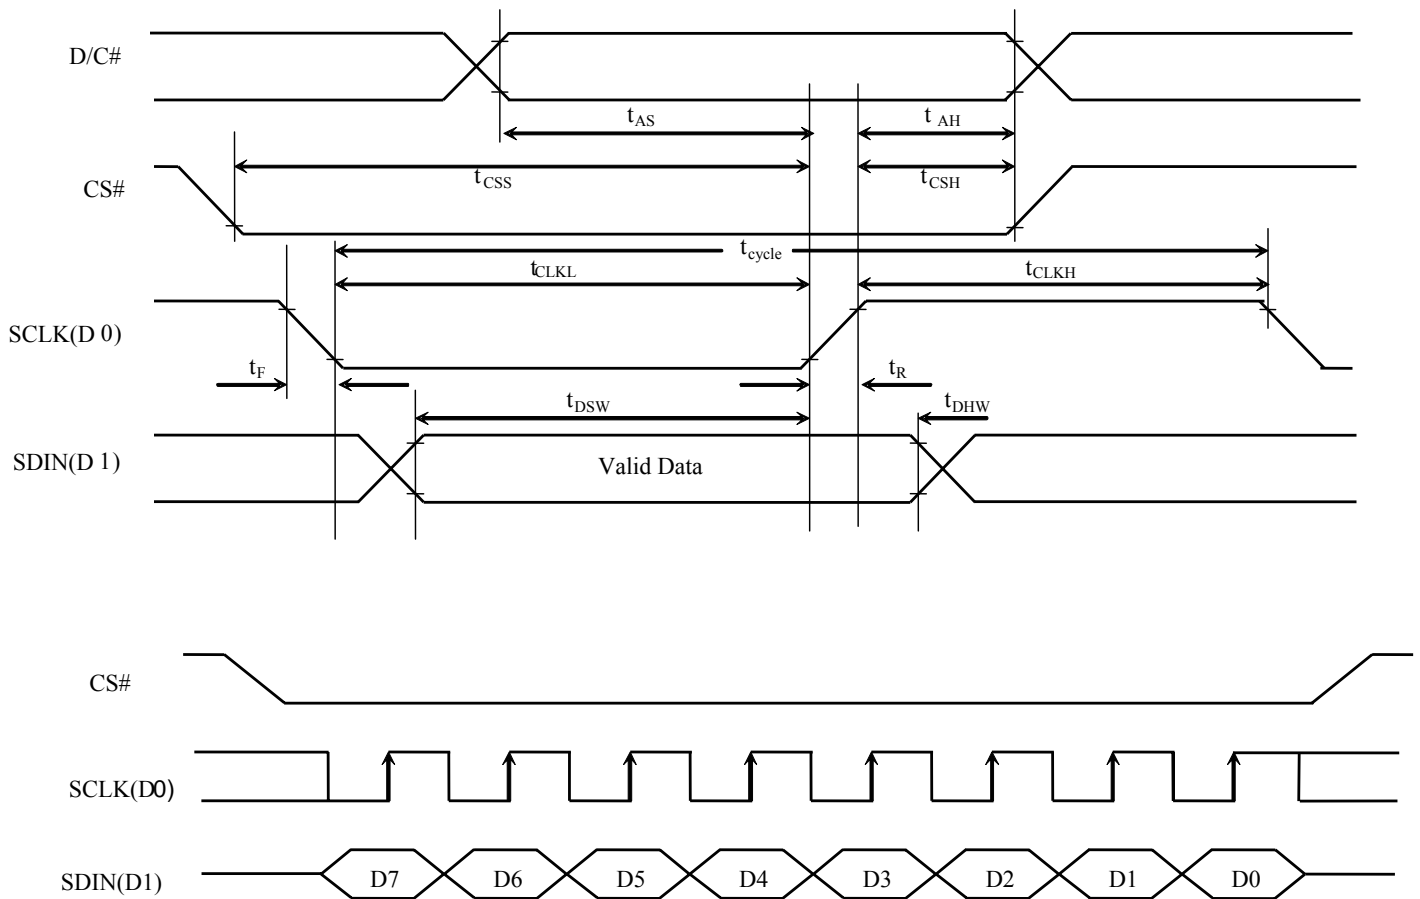

**Conditions:**


$$V_{DD} - V_{SS} = 2.4 \text{ to } 3.5\text{V}$$

$$V_{DDIO} = V_{DD}$$

$$T_A = 25^\circ\text{C}$$

**Table 13-5 :I<sup>2</sup>C Interface Timing Characteristics**


| Symbol              | Parameter   | Min | Typ | Max | Unit |
|---------------------|---|-----|-----|-----|------|
| t <sub>cycle</sub>  | Clock Cycle Time  | 2.5 | -   | -   | us   |
| t <sub>HSTART</sub> | Start condition Hold Time   | 0.6 | -   | -   | us   |
| t <sub>HD</sub>     | Data Hold Time (for “SDA <sub>OUT</sub> ” pin)                            | 0   | -   | -   | ns   |
|                     | Data Hold Time (for “SDA <sub>IN</sub> ” pin)                             | 300 | -   | -   | ns   |
| t <sub>SD</sub>     | Data Setup Time   | 100 | -   | -   | ns   |
| t <sub>SSTART</sub> | Start condition Setup Time (Only relevant for a repeated Start condition) | 0.6 | -   | -   | us   |
| t <sub>SSTOP</sub>  | Stop condition Setup Time   | 0.6 | -   | -   | us   |
| t <sub>R</sub>      | Rise Time for data and clock pin  | -   | -   | 300 | ns   |
| t <sub>F</sub>      | Fall Time for data and clock pin  | -   | -   | 300 | ns   |
| t <sub>IDLE</sub>   | Idle Time before a new transmission can start                             | 1.3 | -   | -   | us   |

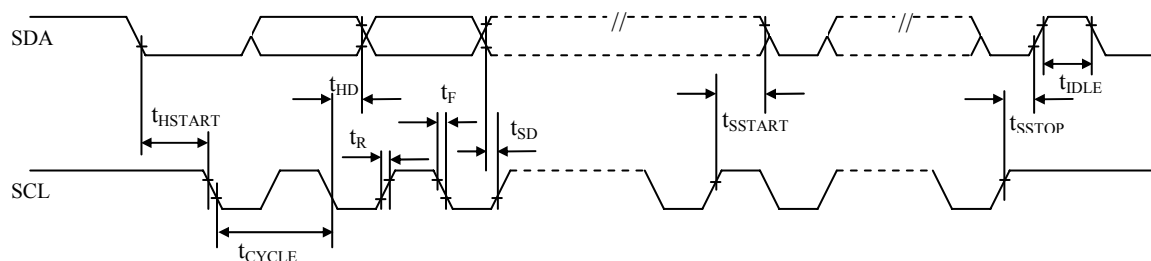**Figure 13-5 : I<sup>2</sup>C interface Timing characteristics**

## 14 APPLICATION EXAMPLE

Figure 14-1 : Application Example of SSD1305T6R1

The configuration for 6800-parallel interface mode, external  $V_{CC}$  is shown in the following diagram:  
( $V_{DD}=2.7V$ ,  $V_{CC}=12V$ ,  $I_{REF}=10\mu A$ )

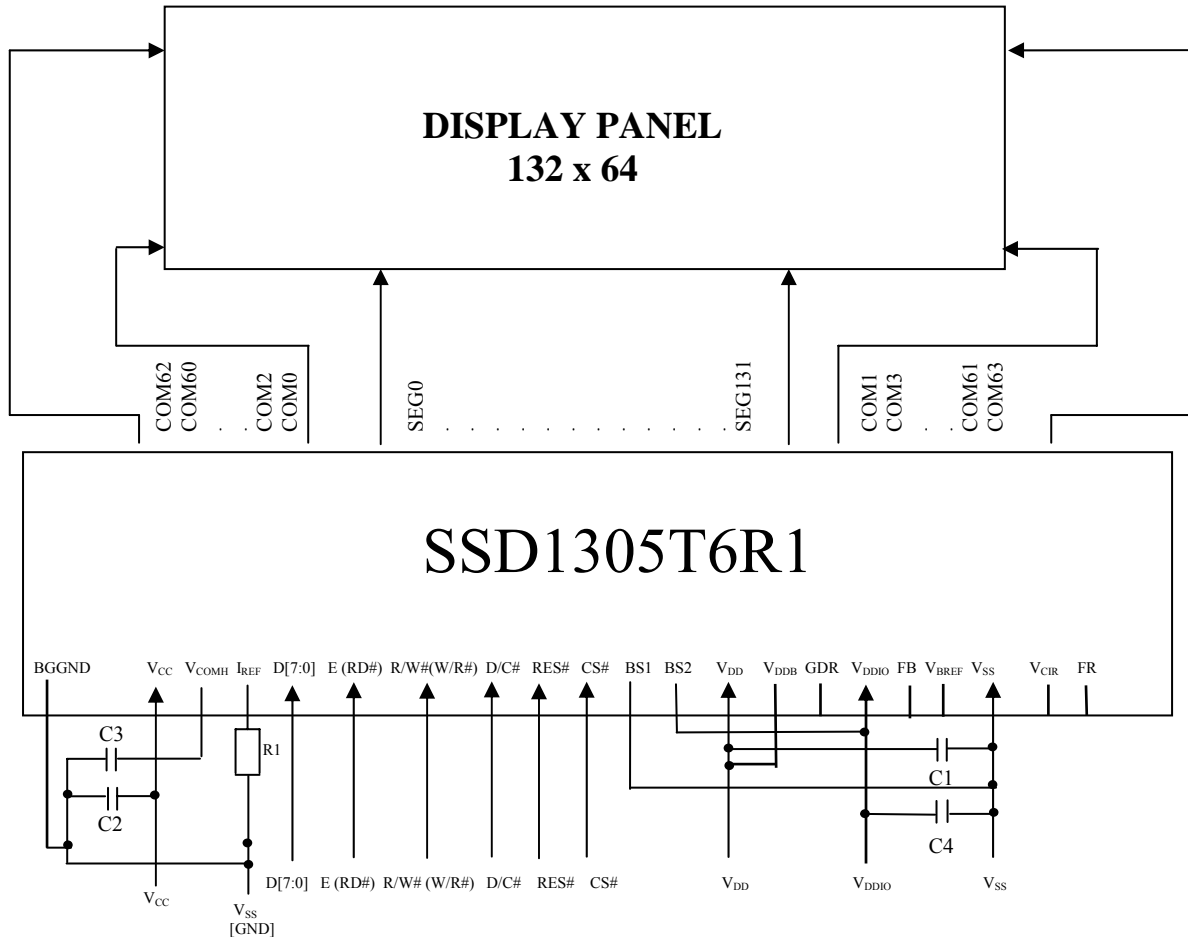

Pin connected to MCU interface: D[7:0], E, R/W#, D/C#, CS#, RES#

Pin internally connected to  $V_{SS}$ : BS0,  $V_{SSB}$

GDR,  $V_{BREF}$ , FB should be left open.

C1: 4.7uF <sup>(1)</sup>

C2: 4.7uF <sup>(1)</sup>

C3: 4.7uF <sup>(1)</sup>

C4: 4.7uF <sup>(1)</sup>

R1: 910kΩ,  $R1 = (\text{Voltage at } I_{REF} \text{ pin} - V_{SS}) / I_{REF}$

Voltage at  $I_{REF}$  pin =  $V_{CC} - 3V$


### Note

<sup>(1)</sup> The capacitor value is recommended value. Select appropriate value against module application.

## 15 PACKAGE INFORMATION


### 15.1 SSD1305Z Die Tray Information


Figure 15-1 SSD1305Z die tray information

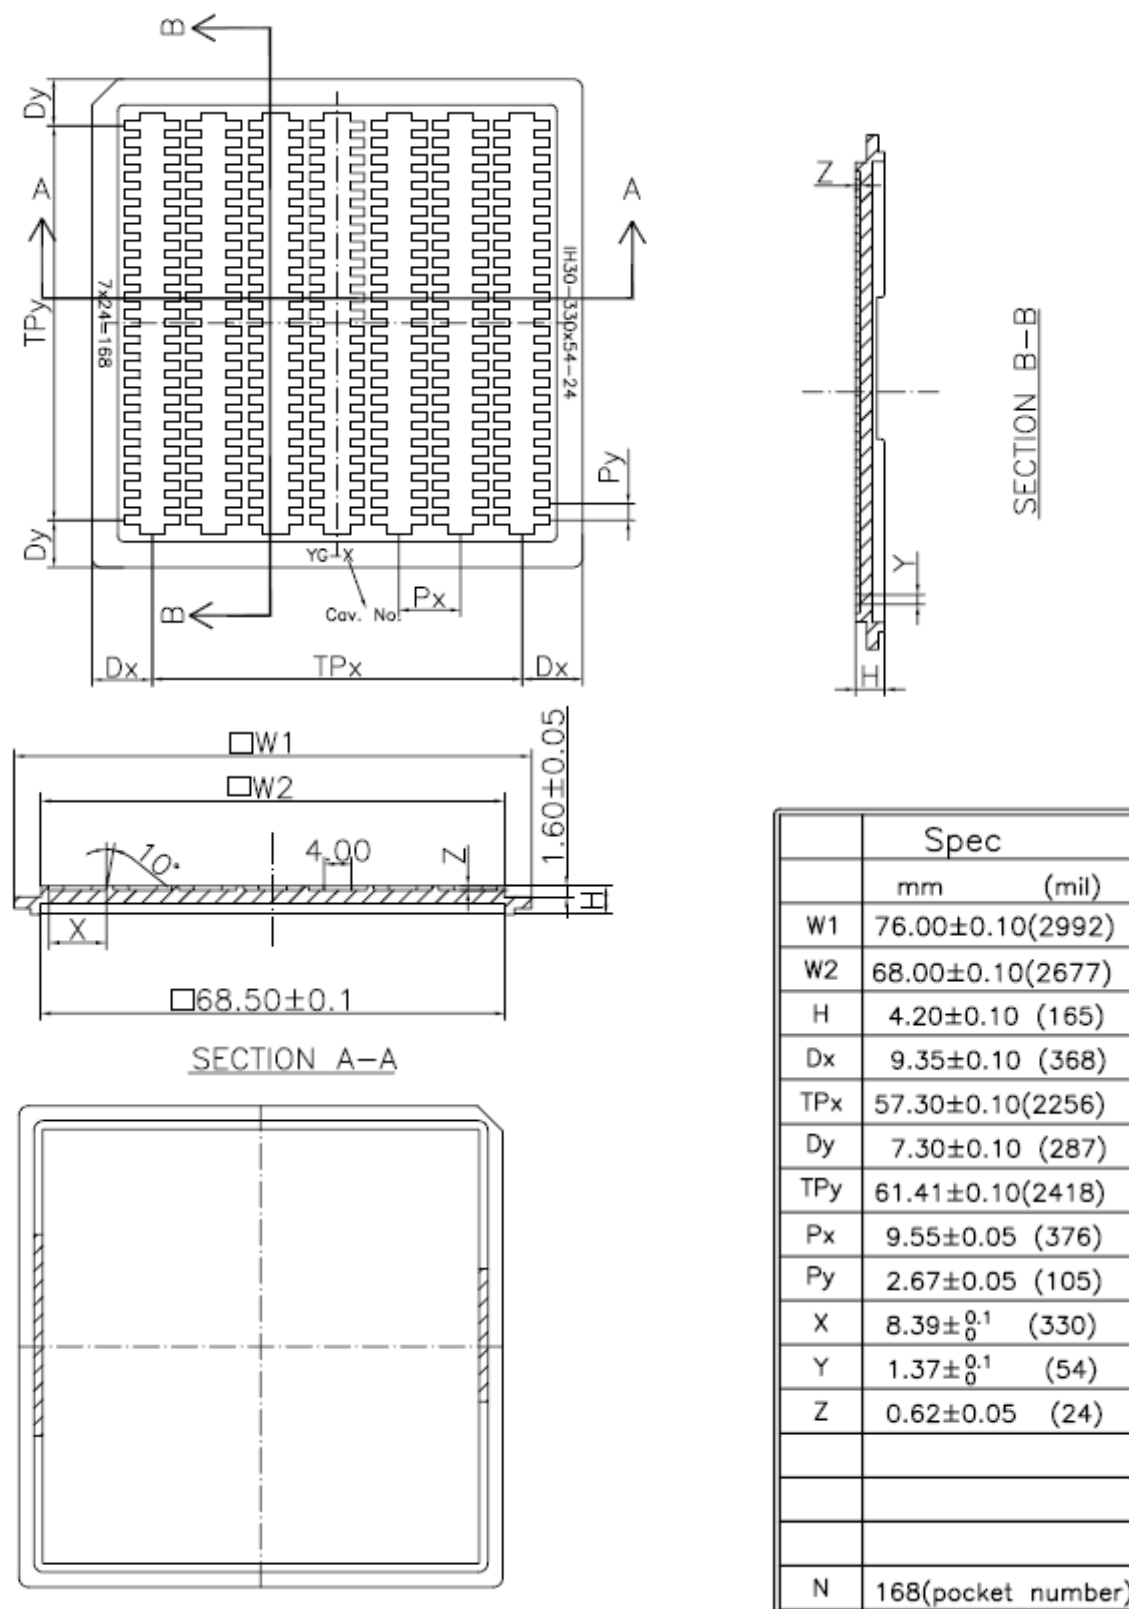

## 15.2 SSD1305T6R1 Detail Dimension

Figure 15-2 SSD1305T6R1 Detail Dimension

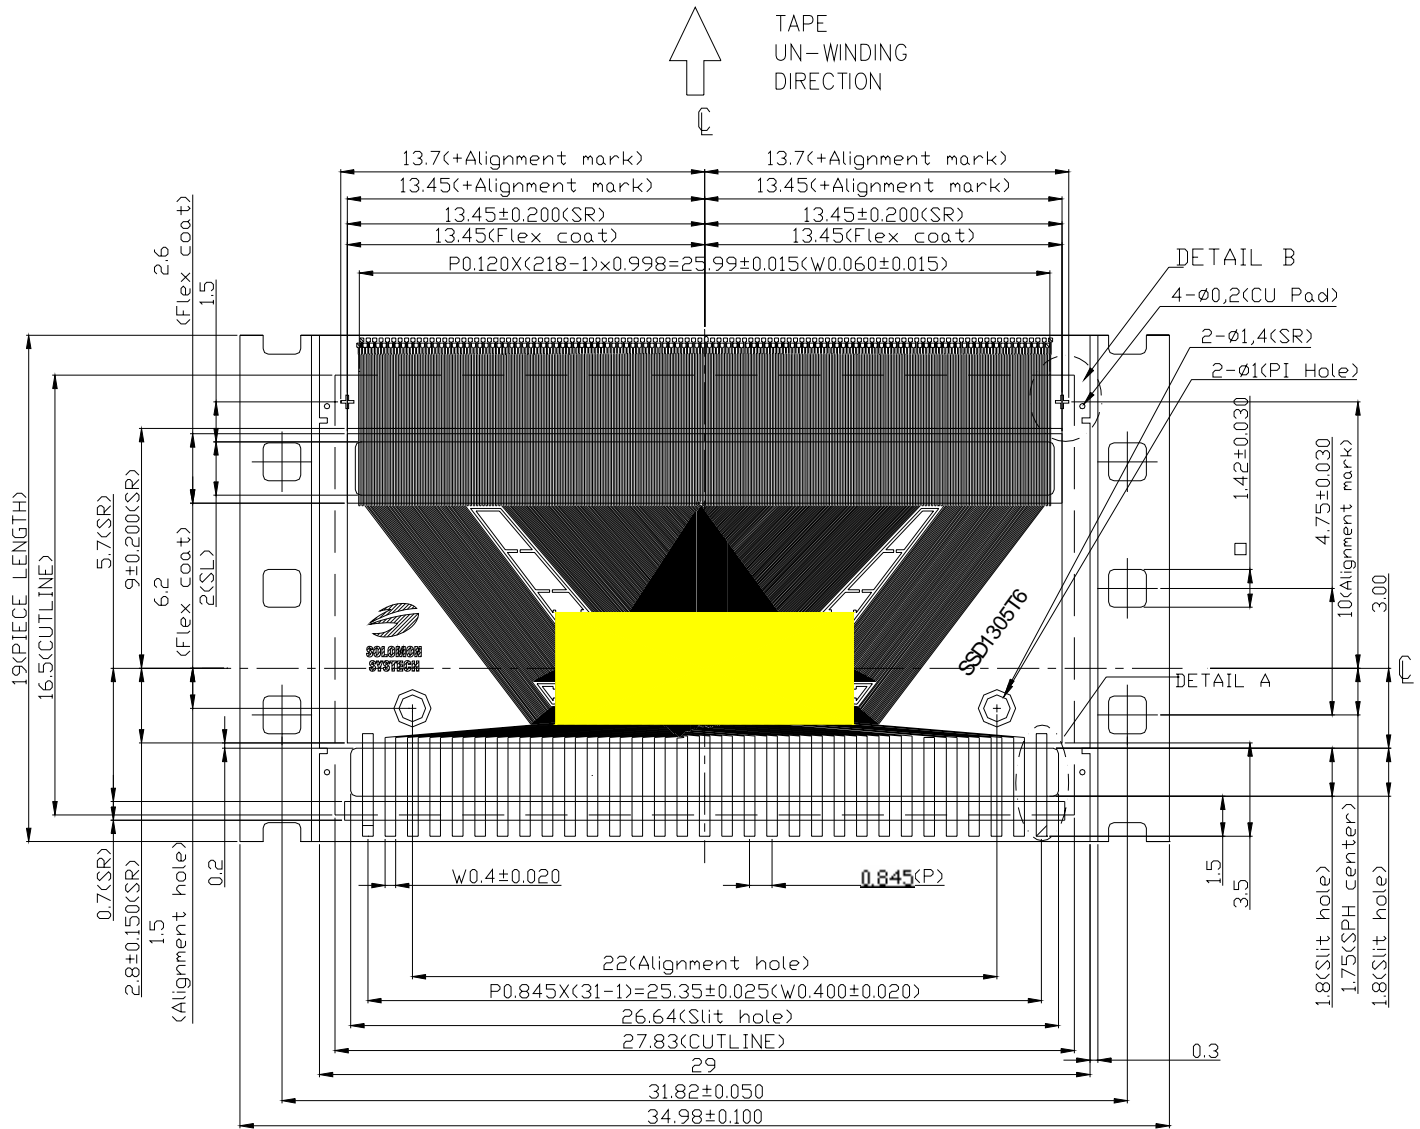

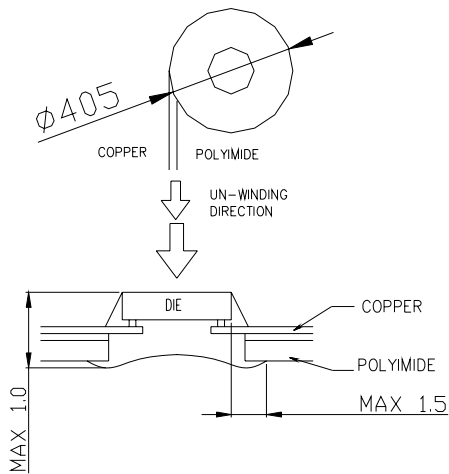

MIRROR DESIGN

NOTE:

1. GENERAL TOLERANCE:  $\pm 0.05\text{MM}$

2. MATERIAL

PI:  $75 \pm 6\mu\text{m}$

Adhesive:  $12 \pm 2\mu\text{m}$  thickness

CU:  $18 \pm 5\mu\text{m}$

SR:  $26 \pm 14\mu\text{m}$


TOLERANCE  $\pm 0.200$

Flex coating :Min  $10\mu\text{m}$


TOLERANCE  $\pm 0.300$

3. SN PLATING:  $0.200 \pm 0.05\mu\text{m}$

4. TAPESITE: 4 SPH, 19mm

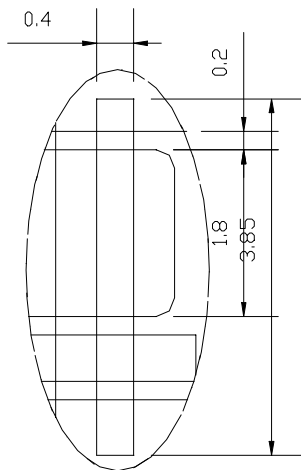


DETAIL A

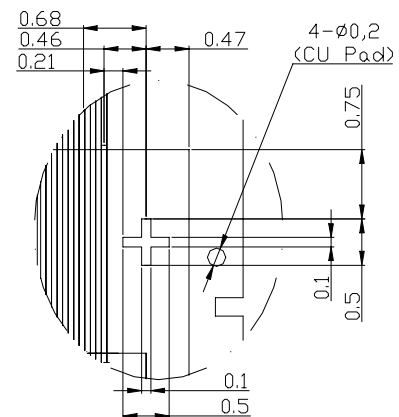

DETAIL B


## 15.3 SSD1305T7R1 Detail Dimension

Figure 15-3 SSD1305T7R1 Detail Dimension

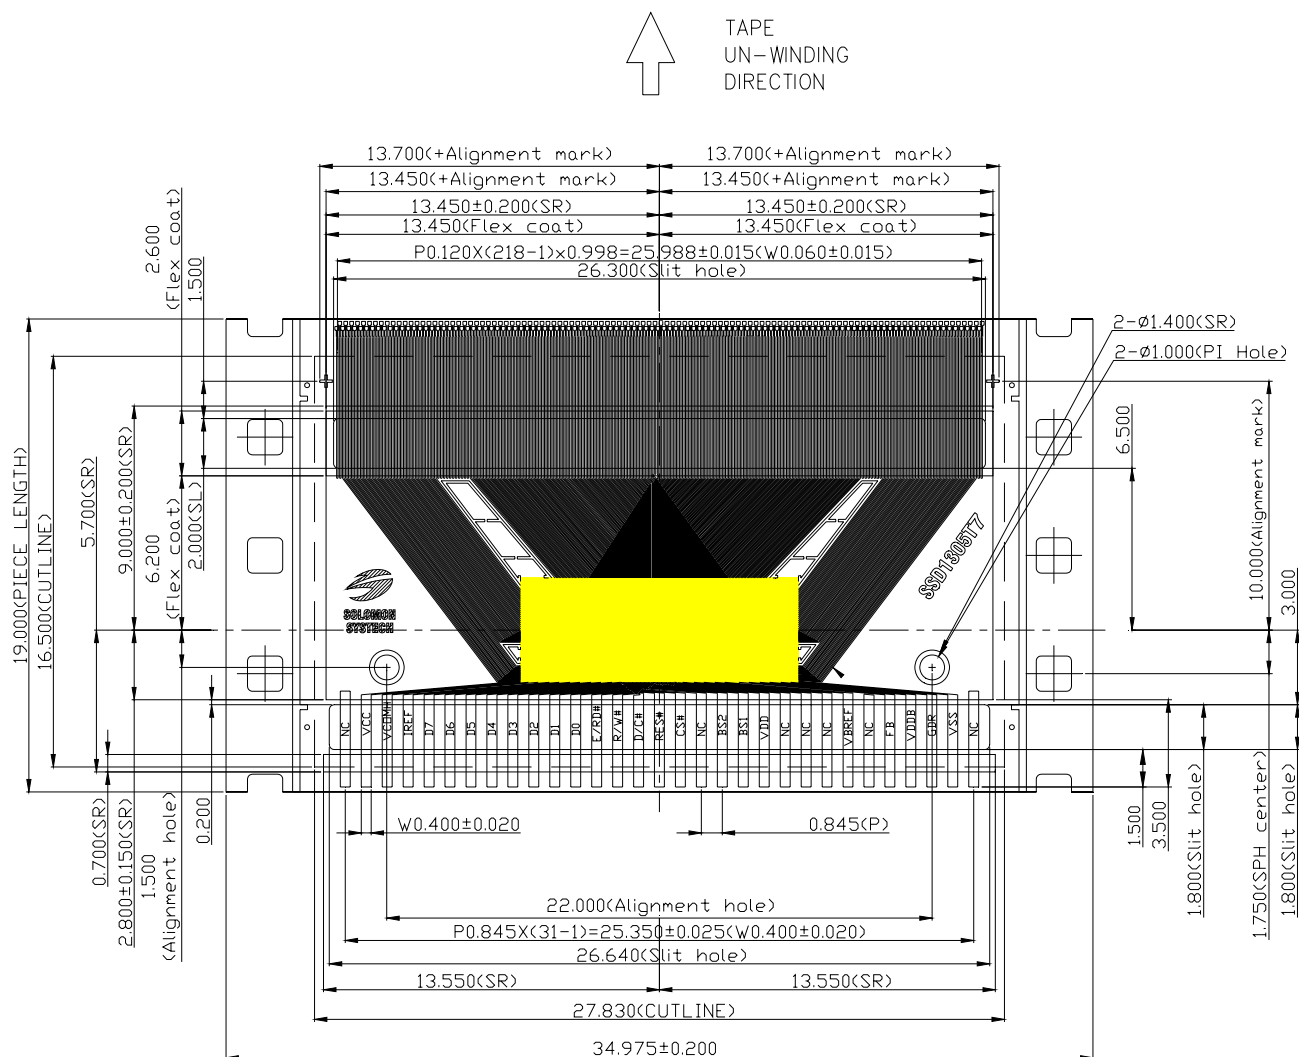

### NOTE:

1. GENERAL TOLERANCE:  $\pm 0.05\text{MM}$
2. MATERIAL  
PI:  $75\pm 6\mu\text{m}$   
Adhesive:  $12\pm 2\mu\text{m}$   
CU:  $18\pm 5\mu\text{m}$   
SR:  $26\pm 14\mu\text{m}$   
TOLERANCE  $\pm 200\mu\text{m}$   
FC: Min  $10\mu\text{m}$
3. SN PLATING:  $0.200\pm 0.05\mu\text{m}$
4. TAPESITE: 4 SPH, 19mm

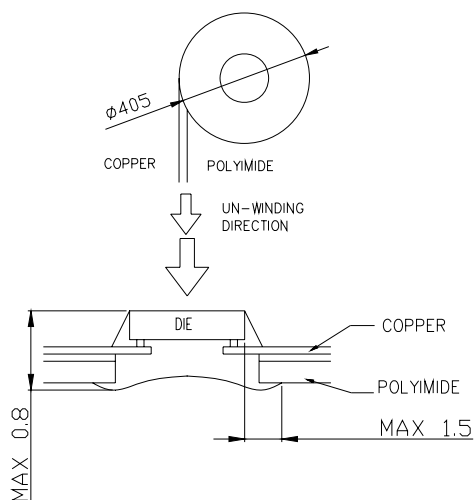


MIRROR DESIGN




## 15.4 SSD1305Z3 Die Tray Information

Figure 15-4 SSD1305Z3 die tray information

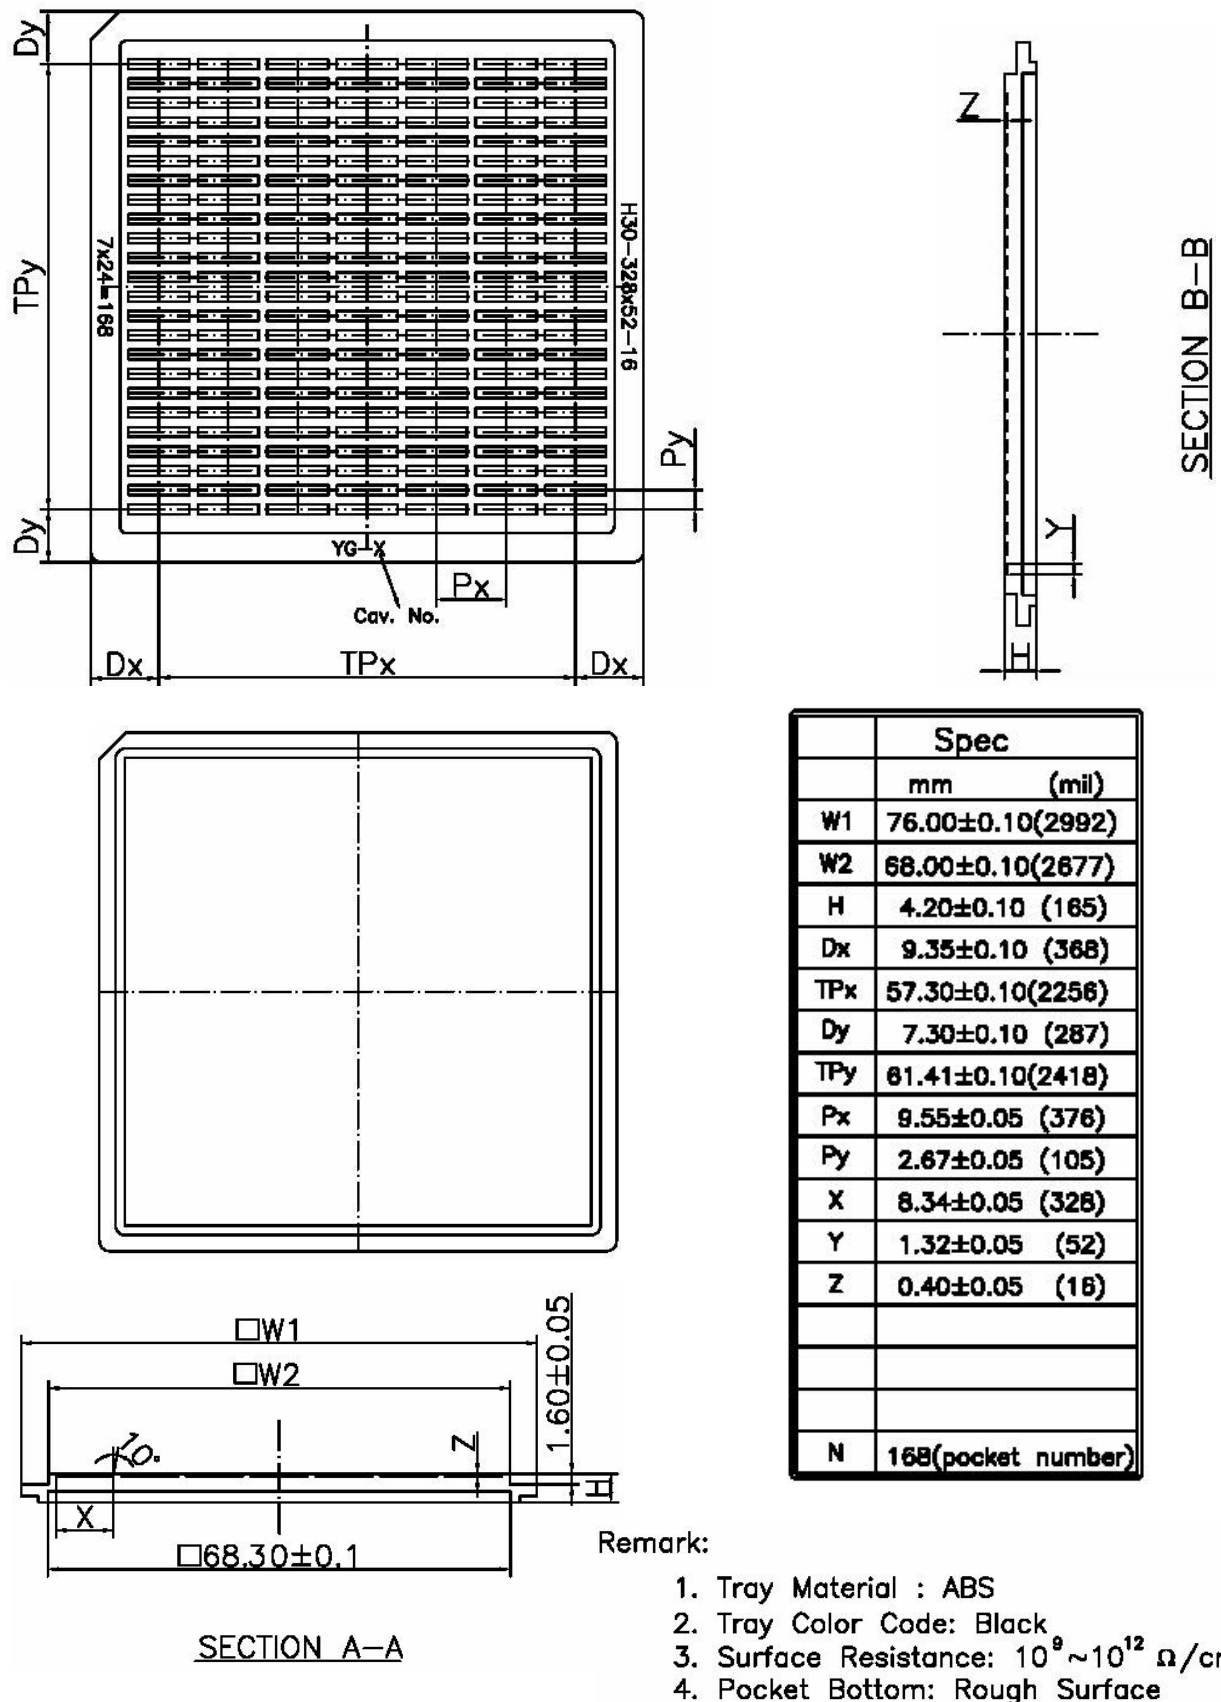

Solomon Systech reserves the right to make changes without notice to any products herein. Solomon Systech makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Solomon Systech assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any, and all, liability, including without limitation consequential or incidental damages. “Typical” parameters can and do vary in different applications. All operating parameters, including “Typical” must be validated for each customer application by the customer’s technical experts. Solomon Systech does not convey any license under its patent rights nor the rights of others. Solomon Systech products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Solomon Systech product could create a situation where personal injury or death may occur. Should Buyer purchase or use Solomon Systech products for any such unintended or unauthorized application, Buyer shall indemnify and hold Solomon Systech and its offices, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Solomon Systech was negligent regarding the design or manufacture of the part.


All Solomon Systech Products complied with six (6) hazardous substances limitation requirement per European Union (EU) “Restriction of Hazardous Substance (RoHS) Directive (2002/95/EC)” and China standard “电子信息产品污染控制标识要求 (SJ/T11364-2006)” with control Marking Symbol . Hazardous Substances test report is available upon requested.

<http://www.solomon-systech.com>



# Crystalfontz America, Incorporated

## CFA10009 Demonstration Board Kits User Guide

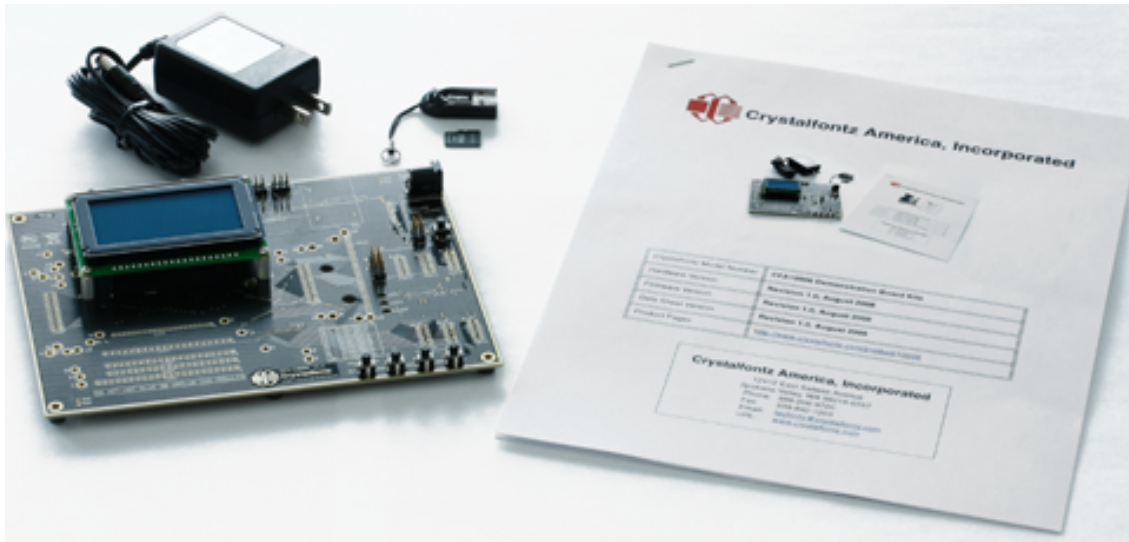

|                           |  |
|---------------------------|--|
| Crystalfontz Model Number | <b>CFA10009 Demonstration Board Kits (for OLEDs)</b>   |
| Hardware Version          | <b>Revision 1.1, June 2009</b>   |
| Firmware Version          | <b>Revision 1.0, June 2009</b>   |
| Data Sheet Version        | <b>Revision 1.0, June 2009</b>   |
| Product Pages             | <a href="http://www.crystalfontz.com/product/CFA10009.html">www.crystalfontz.com/product/CFA10009.html</a> |

### Crystalfontz America, Incorporated

12412 East Saltese Avenue  
Spokane Valley, WA 99216-0357  
Phone: 888-206-9720  
Fax: 509-892-1203  
Email: [techinfo@crystalfontz.com](mailto:techinfo@crystalfontz.com)  
URL: [www.crystalfontz.com](http://www.crystalfontz.com)



## REVISION HISTORY

| CFA10009 DEMONSTATION BOARD |  |
|-----------------------------|--|
| 2009/06/25                  | Current demonstration board version: <b>v1.1</b><br>New demonstration board. |

| CFA10009 DEMONSTRATION BOARD KITS FIRMWARE |  |
|--|--|
| 2009/06/25                                 | Current firmware version (series): <b>v1.0</b><br>Initial release. |

| CFA10009 DEMONSTRATION BOARD KITS USER GUIDE |  |
|--|--|
| 2009/06/25                                   | Current Data Sheet version: <b>v1.0</b><br>New Data Sheet. |

### The Fine Print

Certain applications using Crystalfontz America, Inc. products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications"). CRYSTALFONTZ AMERICA, INC. PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. Inclusion of Crystalfontz America, Inc. products in such applications is understood to be fully at the risk of the customer. In order to minimize risks associated with customer applications, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazard. Please contact us if you have any questions concerning potential risk applications.

Crystalfontz America, Inc. assumes no liability for applications assistance, customer product design, software performance, or infringements of patents or services described herein. Nor does Crystalfontz America, Inc. warrant or represent that any license, either express or implied, is granted under any patent right, copyright, or other intellectual property right of Crystalfontz America, Inc. covering or relating to any combination, machine, or process in which our products or services might be or are used.

The information in this publication is deemed accurate but is not guaranteed.

Company and product names mentioned in this publication are trademarks or registered trademarks of their respective owners.

Copyright © 2009 by Crystalfontz America, Inc., 12412 East Saltese Avenue, Spokane Valley, WA 99216-0357 U.S.A.



## QUICK START

The CFA10009 demonstration board is shipped with a compatible OLED module of your choice installed and tested. Simply plug the power supply (included) into an AC outlet. The CFA10009 will initialize and turn on the display, then run the demonstration script from the included microSD card.

## INTRODUCTION

---

The CFA10009 Demonstration Board Kit has everything you need to easily demonstrate and experiment with one compatible Crystallfontz OLED module. The kit can also be used as a reference for your designs that use a Crystallfontz OLED module listed in the table on the next page.

You can easily modify the miniBASIC scripts and bitmaps on the microSD card to make your own test screens, or even to model user interface functions. All that is needed is the included microSD USB reader, a [text editor](#) (Notepad will do), an [image editor](#) (MS Paint will do), and a simple, open-source format conversion utility ([Image2Code](#)) that we offer free of charge.

Beyond demonstrations, the CFA10009 allows you to easily measure current of the different portions of the circuit under operation.

The schematic, bill of materials, and even the PCB layout is available for download from our site. (As always, no registration is required.) Since the design materials are available before purchase, there is no risk of being "surprised" late in the design.

The CFA10009 is preprogrammed with a microSD boot loader. You can load our simple C example code, the miniBASIC interpreter, or build your own application for the CFA10009's versatile Atmel [ATMEGA2561](#) microcontroller using [AVR Studio](#) and [WinAVR](#) (both free).

The board has a JTAG port for more advanced programming and debugging. All the ports are on 0.1" centers so you can connect them to anything you need. The CFA10009 is so versatile that you may want to use it as a base development platform for your projects.



## CFA10009 KIT CONFIGURATIONS

| FOR OLED MODULE                    | WITH THIS CONTROLLER                | ORDER THIS DEMONSTRATION BOARD KIT | BLOCK DIAGRAM             |
|------------------------------------|-------------------------------------|------------------------------------|---------------------------|
| <a href="#">CFAL12822A-Y-B</a>     | <a href="#">Solomon SSD1305</a>     | <a href="#">DMO-L12822AYB</a>      | <a href="#">Figure 2.</a> |
| <a href="#">CFAL12822A-Y-B1</a>    | <a href="#">Solomon SSD1305</a>     | <a href="#">DMO-L12822AYB1</a>     | <a href="#">Figure 1.</a> |
| <a href="#">CFAL12832C-W-B1</a>    | <a href="#">Sino Wealth SH1101A</a> | <a href="#">DMO-L12832CWB1</a>     | <a href="#">Figure 1.</a> |
| <a href="#">CFAL12864C-Y-B1</a>    | <a href="#">Solomon SSD1305</a>     | <a href="#">DMO-L12864CYB1</a>     | <a href="#">Figure 1.</a> |
| <a href="#">CFAL12864L-G-B2</a>    | <a href="#">Solomon SSD1305</a>     | <a href="#">DMO-L12864LGB2</a>     | <a href="#">Figure 2.</a> |
| <a href="#">CFAL12864L-Y-B2</a>    | <a href="#">Solomon SSD1305</a>     | <a href="#">DMO-L12864LYB2</a>     | <a href="#">Figure 2.</a> |
| <a href="#">CFAL12864L-G-B2TS</a>  | <a href="#">Solomon SSD1305</a>     | <a href="#">DMO-L12864LGB2TS</a>   | <a href="#">Figure 4.</a> |
| <a href="#">CFAL12864L-Y-B2TS</a>  | <a href="#">Solomon SSD1305</a>     | <a href="#">DMO-L12864LYB2TS</a>   | <a href="#">Figure 4.</a> |
| <a href="#">CFAL12864L-G-B4</a>    | <a href="#">Solomon SSD1305</a>     | <a href="#">DMO-L12864LGB4</a>     | <a href="#">Figure 2.</a> |
| <a href="#">CFAL12864L-Y-B4</a>    | <a href="#">Solomon SSD1305</a>     | <a href="#">DMO-L12864LYB4</a>     | <a href="#">Figure 2.</a> |
| <a href="#">CFAL12864L-G-B6</a>    | <a href="#">Solomon SSD1305</a>     | <a href="#">DMO-L12864LGB6</a>     | <a href="#">Figure 2.</a> |
| <a href="#">CFAL12864L-G- B6TS</a> | <a href="#">Solomon SSD1305</a>     | <a href="#">DMO-L12864LGB6TS</a>   | <a href="#">Figure 3.</a> |
| <a href="#">CFAL12864L-Y- B6TS</a> | <a href="#">Solomon SSD1305</a>     | <a href="#">DMO-L12864LYB6TS</a>   | <a href="#">Figure 3.</a> |
| <a href="#">CFAL12864L-W- B6TS</a> | <a href="#">Solomon SSD1305</a>     | <a href="#">DMO-L12864LWB6TS</a>   | <a href="#">Figure 3.</a> |
| <a href="#">CFAL12864N-A-B1</a>    | <a href="#">Sino Wealth SH1101A</a> | <a href="#">DMO-L12864NAB1</a>     | <a href="#">Figure 1.</a> |
| <a href="#">CFAL12864S-Y-B1</a>    | <a href="#">Solomon SSD1303</a>     | <a href="#">DMO-L12864SYB1</a>     | <a href="#">Figure 1.</a> |
| <a href="#">CFAL12864U-W-B1</a>    | <a href="#">Solomon SSD1303</a>     | <a href="#">DMO-L12864UWB1</a>     | <a href="#">Figure 1.</a> |
| <a href="#">CFAL12864Z-G-B2</a>    | <a href="#">Solomon SSD1325</a>     | <a href="#">DMO-L12864ZGB2</a>     | <a href="#">Figure 2.</a> |
| <a href="#">CFAL12864Z-Y-B2</a>    | <a href="#">Solomon SSD1325</a>     | <a href="#">DMO-L12864ZYB2</a>     | <a href="#">Figure 2.</a> |
| <a href="#">CFAL12864Z-G-B2TS</a>  | <a href="#">Solomon SSD1325</a>     | <a href="#">DMO-L12864ZGB2TS</a>   | <a href="#">Figure 4.</a> |
| <a href="#">CFAL12864Z-Y-B2TS</a>  | <a href="#">Solomon SSD1325</a>     | <a href="#">DMO-L12864YB2TS</a>    | <a href="#">Figure 4.</a> |
| <a href="#">CFAL12864Z-G-B4</a>    | <a href="#">Solomon SSD1325</a>     | <a href="#">DMO-L12864ZGB4</a>     | <a href="#">Figure 2.</a> |
| <a href="#">CFAL12864Z-Y-B4</a>    | <a href="#">Solomon SSD1325</a>     | <a href="#">DMO-L12864ZYB4</a>     | <a href="#">Figure 2.</a> |
| <a href="#">CFAL12864Z-G-B6</a>    | <a href="#">Solomon SSD1325</a>     | <a href="#">DMO-L12864ZGB6</a>     | <a href="#">Figure 2.</a> |
| <a href="#">CFAL12864Z-W-B6</a>    | <a href="#">Solomon SSD1325</a>     | <a href="#">DMO-L12864ZWB6</a>     | <a href="#">Figure 2.</a> |
| <a href="#">CFAL12864Z-Y-B6</a>    | <a href="#">Solomon SSD1325</a>     | <a href="#">DMO-L12864ZYB6</a>     | <a href="#">Figure 2.</a> |



| FOR OLED MODULE                   | WITH THIS CONTROLLER            | ORDER THIS DEMONSTRATION BOARD KIT | BLOCK DIAGRAM             |
|-----------------------------------|---------------------------------|------------------------------------|---------------------------|
| <a href="#">CFAL12864Z-G-B6TS</a> | <a href="#">Solomon SSD1325</a> | <a href="#">DMO-L12864ZGB6TS</a>   | <a href="#">Figure 3.</a> |
| <a href="#">CFAL12864Z-W-B6TS</a> | <a href="#">Solomon SSD1325</a> | <a href="#">DMO-L12864ZWB6TS</a>   | <a href="#">Figure 3.</a> |
| <a href="#">CFAL12864Z-Y-B6TS</a> | <a href="#">Solomon SSD1325</a> | <a href="#">DMO-L12864ZYB6TS</a>   | <a href="#">Figure 3.</a> |
| <a href="#">CFAL25664A-Y-B1</a>   | <a href="#">ST STV8105</a>      | <a href="#">DMO-L25664AYB1</a>     | <a href="#">Figure 1.</a> |
| <a href="#">CFAL9664A-W-B1</a>    | <a href="#">Solomon SSD1305</a> | <a href="#">DMO-L9664AWB1</a>      | <a href="#">Figure 1.</a> |

## CONTENTS OF DEMONSTRATION BOARD KIT

---

- ☐ CFA10009 Demonstration Board (PCB).
- ☐ Installed OLED module of your choice. (Selected at time of ordering. See choices in the table above.)
- ☐ Power adapter.
- ☐ MicroSD memory card loaded with BASIC demonstration program and bitmap images.
- ☐ USB reader for the microSD memory card.

In addition to the kit contents, a zipped folder of hardware design and program files is available at <http://www.crystalfontz.com/product/CFA10009.html>. (Free download.)

## HOW TO MAKE A CUSTOM DEMONSTRATION

---

The CFA10009 is programmed with firmware that will read a BASIC program file from the microSD memory card. The BASIC program can read bitmap image files from the microSD memory card and display them on the OLED module. The BASIC program can also read the four demonstration board buttons and change the brightness settings.

By using the USB reader, a text editor, and a graphic conversion utility (provided), you can customize the demonstration to include your own bitmap images. The large capacity of the microSD card allows you to create complex demonstrations.

For the most recent version of the graphic conversion utility, sample scripts, and sample images for customizing the demonstration, download the zipped folder at <http://www.crystalfontz.com/product/CFA10009.html>.

## LOADING A CUSTOM HEX FILE

The CFA10009 Demonstration Board Kit is shipped with the miniBasic-AVR interpreter loaded into the microcontroller Atmel ATMEGA2561's flash memory.

If you want to load our simple demonstration or your own program, simply name the hex file "cfa10009.hex" and copy it into the root the directory of the microSD card. When the CFA10009 boots, the boot loader will program the ATMEGA2561's flash with "cfa10009.hex" and then execute it.



*Acknowledgement Note:* The miniBASIC-AVR is a derivative of [this](http://www.personal.leeds.ac.uk/~bgy1mm/Minibasic/MiniBasicHome.html) (see <http://www.personal.leeds.ac.uk/~bgy1mm/Minibasic/MiniBasicHome.html>). The miniBASIC-AVR also includes the [EFSL embedded filesystems library](http://efsl.be/) (see <http://efsl.be/>).

## HARDWARE DESIGN INFORMATION

### BLOCK DIAGRAM

Here are block diagrams of the CFA10009 Demonstration Board with different types of installed modules:

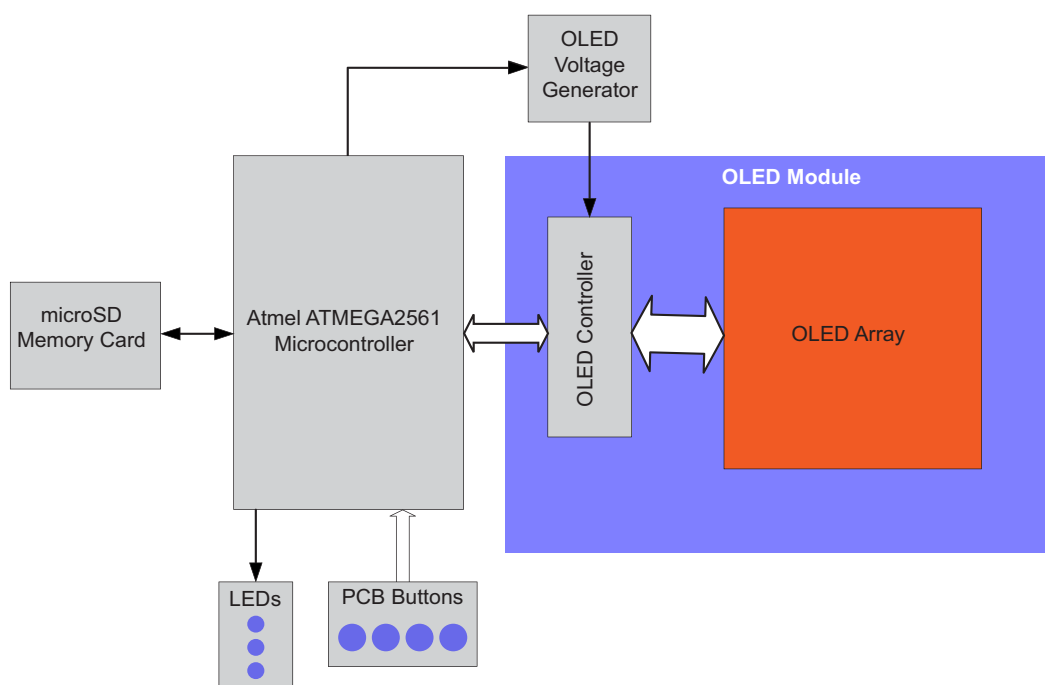


Figure 1. For kits with CFAL12822A-Y-B1, CFAL12832C-W-B1, CFAL12864C-Y-B1, CFAL12864N-A-B1, CFAL12864S-Y-B1, CFAL25664A-Y-B1, and CFAL9664A-W-B1



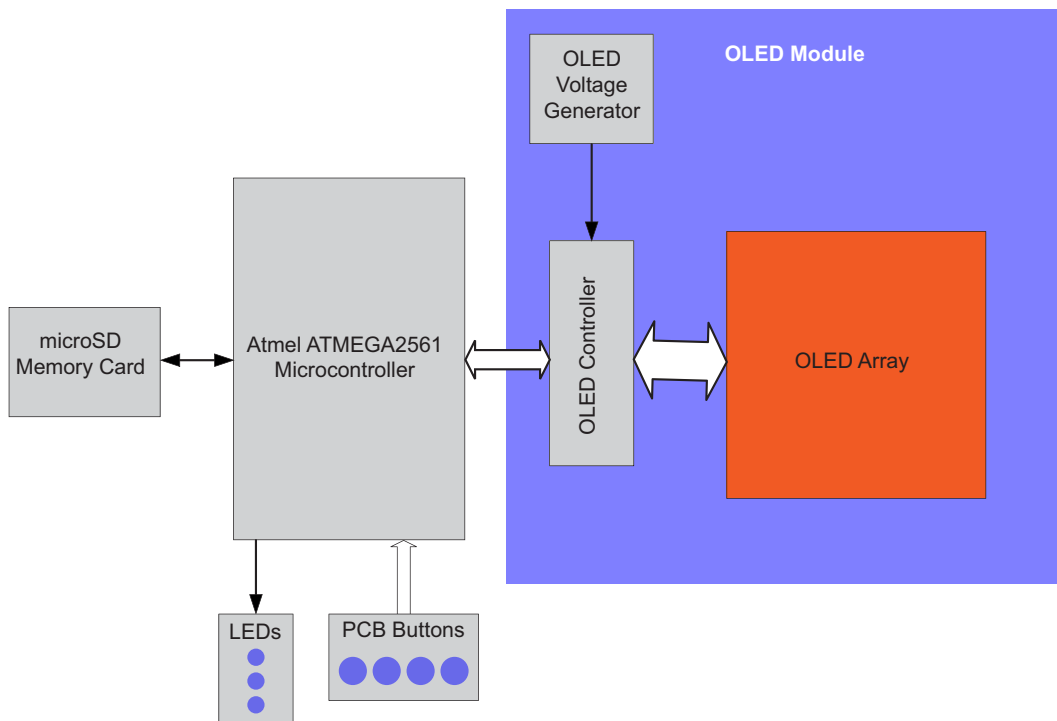


Figure 2. For kits with CFAL12822A-Y-B, CFAL12864L-G-B2, CFAL12864L-Y-B2, CFAL12864L-G-B4, CFAL12864L-Y-B4, CFAL12864L-G-B6, CFAL12864Z-G-B2, CFAL12864Z-Y-B2, CFAL12864Z-G-B4, CFAL12864Z-Y-B4, CFAL12864Z-G-B6, CFAL12864Z-W-B6, and CFAL12864Z-Y-B6

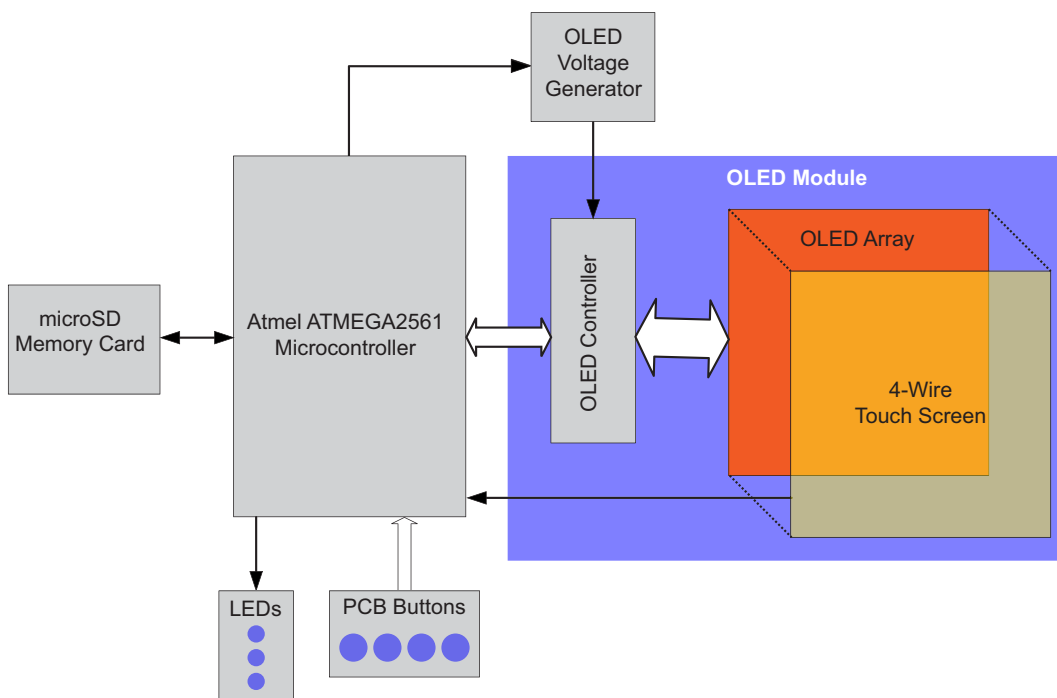


Figure 3. For kits with CFAL12864L-G- B6TS, CFAL12864L-Y- B6TS, and CFAL12864L-W- B6TS

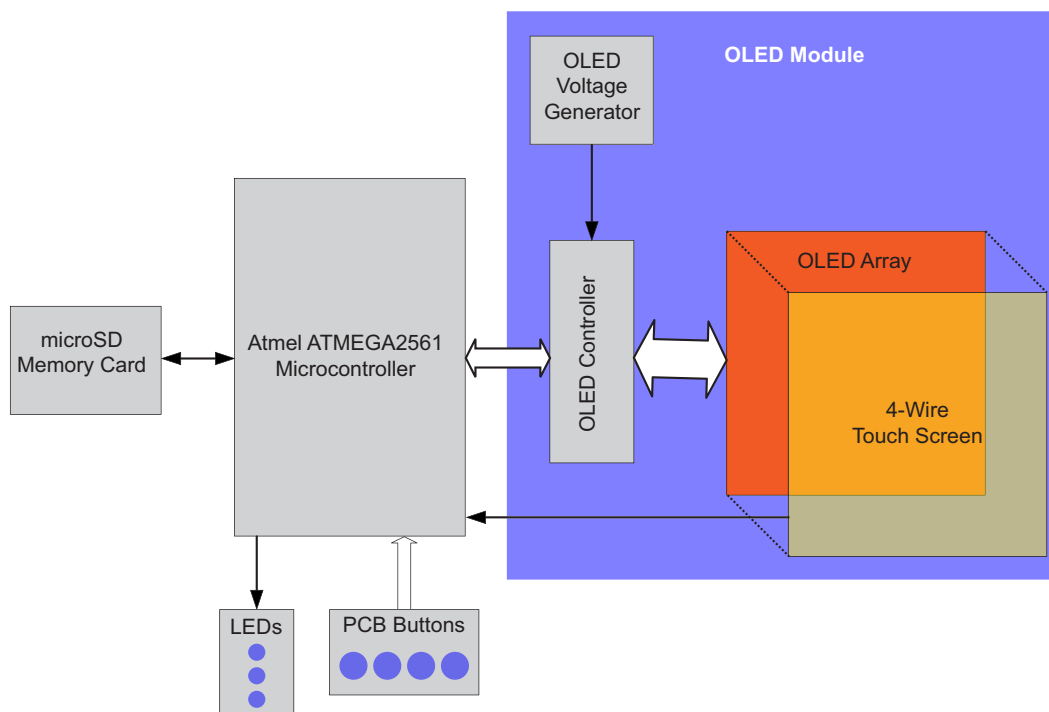


Figure 4. CFAL12864L-G-B2TS, CFAL12864L-Y-B2TS, CFAL12864L-G-B6TS, CFAL12864L-Y-B6TS, CFAL12864Z-G-B2TS, CFAL12864Z-Y-B2TS, CFAL12864Z-G-B6TS, CFAL12864Z-W-B6TS, and CFAL12864Z-Y-B6TS

## CONTENTS OF HARDWARE DESIGN FOLDER

The zipped folder at <http://www.crystalfontz.com/product/CFA10009.html> includes the complete hardware design of the CFA10009 Demonstration Board.

- ☐ Schematic.
- ☐ PCB layout.
- ☐ Bill Of Materials (BOM) as an XLS spreadsheet.
- ☐ Simple OLED initialization code and bitmap display code.

The schematic and PCB layout were created with CadSoft EAGLE. EAGLE is a capable and low-cost electrical CAD system. You can download a freeware light edition of EAGLE from <http://www.cadsoft.de/> to load, view, and print the schematic and layout files.



## CARE AND HANDLING PRECAUTIONS

---

The kit is sold with a module mounted on it. If you attempt to modify the board to work with other modules, the warranty is void. Do not disassemble or modify the CFA10009 Demonstration Board Kit.

For optimum operation of the module and demonstration board and to prolong their life, please follow the precautions below.

### ESD (ELECTRO-STATIC DISCHARGE)

The circuitry is industry standard CMOS logic and susceptible to ESD damage. Please use industry standard antistatic precautions as you would for any other PCB such as expansion cards or motherboards. Ground your body, work surfaces, and equipment.

### AVOID SHOCK, IMPACT, TORQUE, OR TENSION

- Do not expose the demonstration board and module to strong mechanical shock, impact, torque, or tension.
- Do not drop, toss, bend, or twist the demonstration board and module.
- Do not place weight or pressure on the demonstration board and module.

### OPERATION

- The module ships with a protective film over the display. Please peel off the protective film slowly. Peeling off the protective film abruptly may generate static electricity.
- Use only the included AC adapter to power the board.
- Observe the operating temperature limitations for the module: from -20°C minimum to +70°C maximum with minimal fluctuations. Operation outside of these limits may shorten the life and/or harm the display.
- Operate away from dust, moisture, and direct sunlight.

### CLEANING

- The polarizer (laminated to the glass) is soft plastic. The soft plastic is easily scratched or damaged. Be very careful when you clean the polarizer.
- Do not clean the polarizer with liquids. Do not wipe the polarizer with any type of cloth or swab (for example, Q-tips).
- Use the removable protective film to remove smudges (for example, fingerprints) and any foreign matter. If you no longer have the protective film, use standard transparent office tape (for example, Scotch® brand "Crystal Clear Tape"). If the polarizer is dusty, you may carefully blow it off with clean, dry, oil-free compressed air.

### STORAGE AND RECYCLING



- Store in an ESD-approved container away from dust, moisture, and direct sunlight.
- Observe the storage temperature limitations: from -30°C minimum to +80°C maximum with minimal fluctuations. Rapid temperature changes can cause moisture to form, resulting in permanent damage.
- Do not allow weight to be placed on the modules while they are in storage.
- Please recycle the demonstration board and module at an approved facility.