




## HDMI TFT LCD DISPLAY MODULE DATASHEET

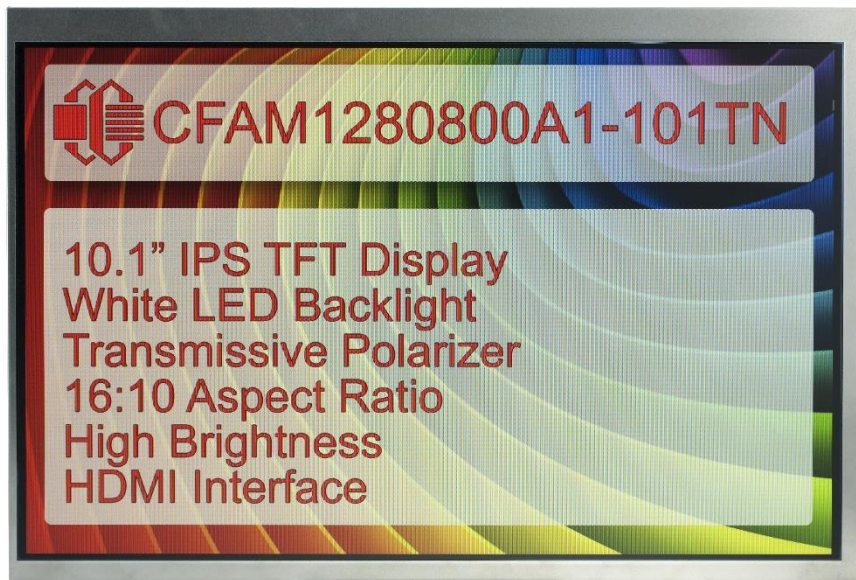

Datasheet Release Date 2024-05-07

for

**CFAM1280800A1-101TN**

### **Crystalfontz America, Inc.**

12412 East Saltese Avenue  
Spokane Valley, WA 99216-0357  
Phone: 888-206-9720  
Fax: 509-892-1203  
Email: [support@crystalfontz.com](mailto:support@crystalfontz.com)  
URL: <https://www.crystalfontz.com>



## CONTENTS

1. General Information .....	3
2. Module Description .....	4
3. Features .....	4
4. Mechanical Data .....	4
5. Mechanical Drawing .....	5
6. Interface Pin Function .....	7
6.1. CON6 .....	7
6.2. CON5 .....	8
6.3. HDMI Connector (DVI only) .....	9
6.4. Power Jack .....	9
7. Absolute Maximum Ratings .....	9
8. Electrical Characteristics .....	10
9. Optical Characteristics .....	10
10. LCD Module Precautions .....	10
10.1. Modules .....	10
10.2. Handling Precautions .....	10
10.3. Storage Precautions .....	11
10.4. Designing Precautions .....	12
10.5. Disposing Precautions .....	12
10.6. Other Precautions .....	12



## 1. General Information

### Datasheet Revision History

Datasheet Release: **2024-05-07**  
Datasheet for the CFAM1280800A1-101TN graphic display module.

### Product Change Notifications

You can check for or subscribe to [Part Change Notices](#) for this display module on our website.

### Variations

Slight variations between lots are normal (e.g., contrast, color, or intensity).

### Volatility

This display module has volatile memory.

### Disclaimer

Certain applications using Crystalfontz America, Inc. products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications"). CRYSTALFONTZ AMERICA, INC. PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. Inclusion of Crystalfontz America, Inc. products in such applications is understood to be fully at the risk of the customer. In order to minimize risks associated with customer applications, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazard. Please contact us if you have any questions concerning potential risk applications.

Crystalfontz America, Inc. assumes no liability for applications assistance, customer product design, software performance, or infringements of patents or services described herein. Nor does Crystalfontz America, Inc. warrant or represent that any license, either express or implied, is granted under any patent right, copyright, or other intellectual property right of Crystalfontz America, Inc. covering or relating to any combination, machine, or process in which our products or services might be or are used.

All specifications in datasheets on our website are, to the best of our knowledge, accurate but not guaranteed. Corrections to specifications are made as any inaccuracies are discovered.

Company and product names mentioned in this publication are trademarks or registered trademarks of their respective owners.

Copyright ©2024 by Crystalfontz America, Inc., 12412 East Saltese Avenue, Spokane Valley, WA 99216 U.S.A.



## 2. Module Description

This is a 10.1-inch, 1280x800 HDMI TFT LCD display and Control Board with HDMI interface. This display has a 40-pin connector on board (CON4), that is a pass-through of the Raspberry Pi's (RPI) 40-pin connector so that you don't lose any of the RPI's functionality.

This display is large and bright, and is easy to use with a Raspberry Pi or a Mini-Computer display with an embedded system that has HDMI output.

When bringing this up on the RPi, to ensure the device is enabled at boot time, add the following lines to /boot/config.txt:

```
hdmi_group=2  
hdmi_mode=27
```

Please note that HDMI, power, and USB cables are not included.



## 3. Features

- 1280\*800 Dot Matrix
- Viewing Direction: any
- IPS, Transmissive, normally black
- White LED Backlight
- Operating Temperature: -20°C to +70°C
- Storage Temperature: -30°C to +80°C
- Aspect Ratio: 16:10
- Interface: HDMI (DVI only)
- Anti-Glare
- 

## 4. Mechanical Data


Item	Specification (mm)	Specification (inch, reference)
Overall Width and Height	230.56 (W) x 155.01 (H) x 25.6 (D)	9.08 (W) x 6.10 (H) x 1.01 (D)
Viewing Area	220.60 (W) x 138.70 (H)	8.69 (W) x 5.46 (H)
Active Area	216.96 (W) x 135.60 (H)	8.54 (W) x 5.34 (H)
Dot Pitch	0.1695 (W) x 0.1695 (H)	0.0067 (W) x 0.0067 (H)
Weight (Typical)	391 grams	13.8 ounces

## 5. Mechanical Drawing

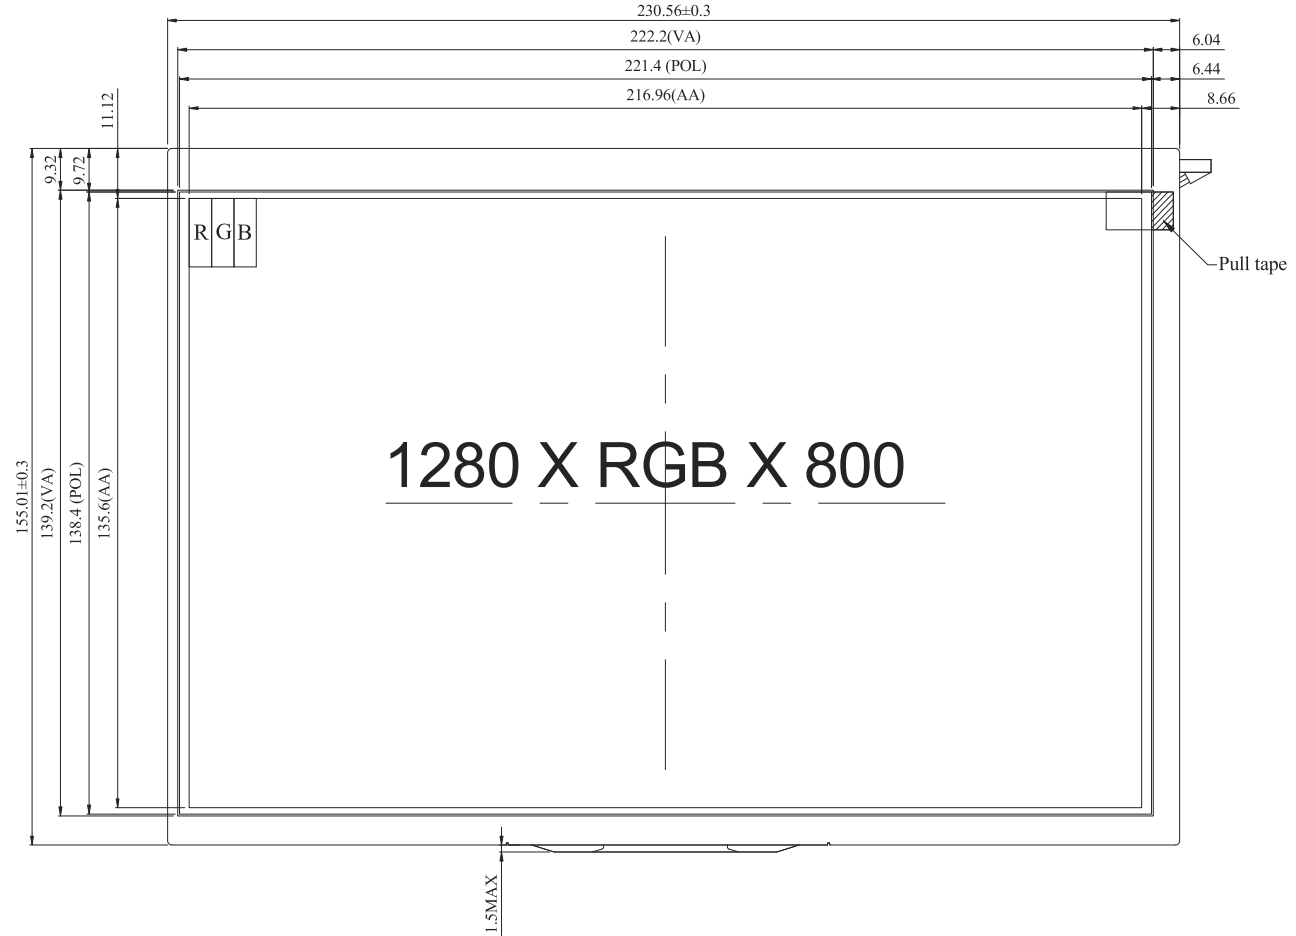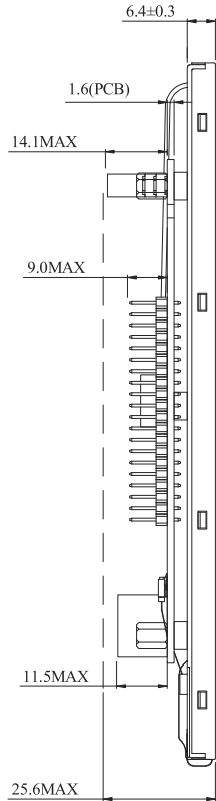

The non-specified tolerance of dimension is ±0.3 mm .



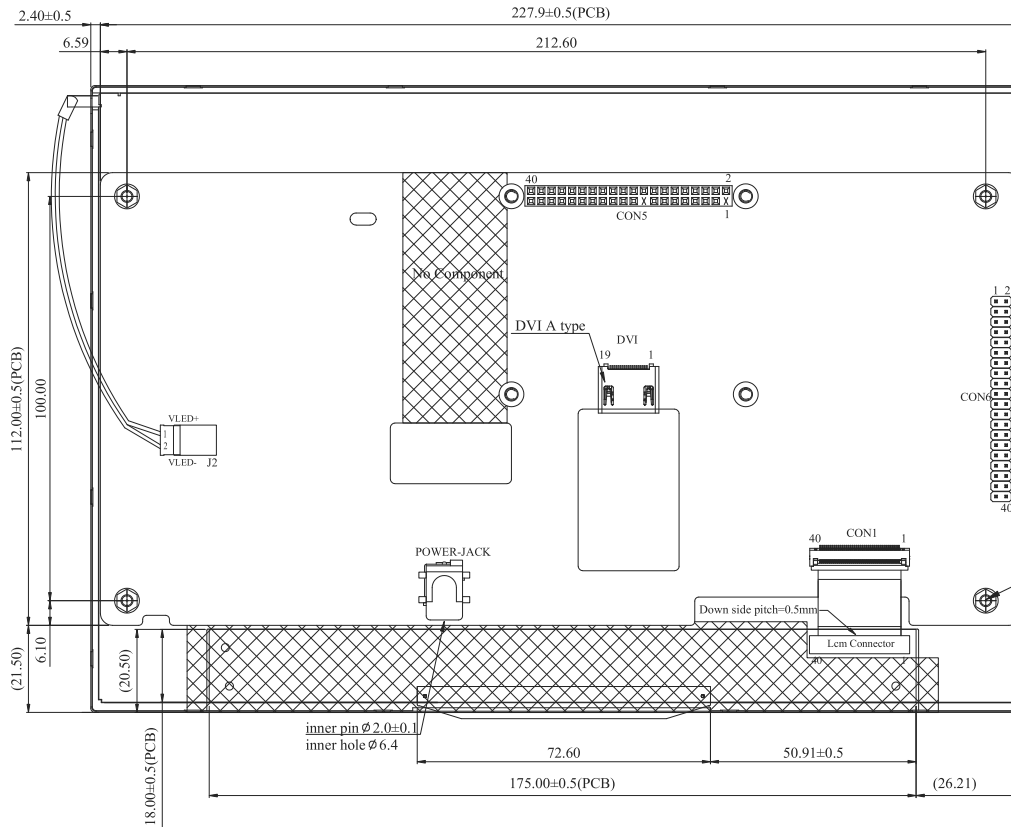

CON5

Pin	Symbol	Pin	Symbol
1	NC	21	GPIO09
2	5V	22	GPIO25
3	GPIO02	23	GPIO11
4	5V	24	GPIO08
5	GPIO03	25	GND
6	GND	26	GPIO07
7	GPIO04	27	ID_SD
8	GPIO14	28	ID_SC
9	GND	29	GPIO05
10	GPIO15	30	GND
11	GPIO17	31	GPIO06
12	BL-PWM (GPIO18)	32	GPIO12
13	GPIO27	33	GPIO13
14	GND	34	GND
15	GPIO22	35	GPIO19
16	GPIO23	36	GPIO16
17	NC	37	GPIO26
18	GPIO24	38	GPIO20
19	GPIO10	39	GND
20	GND	40	GPIO21


CON6

Pin	Symbol	Pin	Symbol
1	3.3V	21	GPIO09
2	5V	22	GPIO25
3	GPIO02	23	GPIO11
4	5V	24	GPIO08
5	GPIO03	25	GND
6	GND	26	GPIO07
7	GPIO04	27	ID_SD
8	GPIO14	28	ID_SC
9	GND	29	GPIO05
10	GPIO15	30	GND
11	GPIO17	31	GPIO06
12	BL-PWM (GPIO18)	32	GPIO12
13	GPIO27	33	GPIO13
14	GND	34	GND
15	GPIO22	35	GPIO19
16	GPIO23	36	GPIO16
17	3.3V	37	GPIO26
18	GPIO24	38	GPIO20
19	GPIO10	39	GND
20	GND	40	GPIO21

DVI

Pin	Symbol
1	RX2+
2	GND
3	RX2-
4	RX1+
5	GND
6	RX1-
7	RX0+
8	GND
9	RX0-
10	RXC+
11	GND
12	RXC-
13	NC
14	NC
15	SCL
16	SDA
17	GND
18	5V
19	Detect

Hex Standoffs:  
4-M3\*P0.5

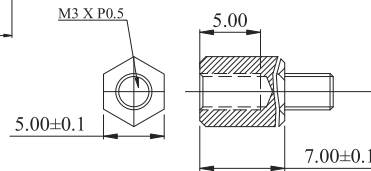

Hex Standoffs  
SCALE:3/1

POWER JACK

Pin	Symbol
1	5V
2	GND
3	NC

2 —  $\odot$  — 1  
(GND) (5V)

The non-specified tolerance of dimension is  $\pm 0.3$  mm .



## 6. Interface Pin Function

### 6.1. CON6

Pin	Symbol	Function
1	3.3V	TFT Module Power limit can only output 3.3V,100mA
2	5V	Raspberry Pi: Power 5V
3	GPIO02	Raspberry Pi: GPIO02
4	5V	Raspberry Pi: Power 5V
5	GPIO03	Raspberry Pi: GPIO03
6	GND	Raspberry Pi: GND
7	GPIO04	Raspberry Pi: GPIO04
8	GPIO14	Raspberry Pi: GPIO14
9	GND	Raspberry Pi: GND
10	GPIO15	Raspberry Pi: GPIO15
11	GPIO17	Raspberry Pi: GPIO17
12	BL-PWM (GPIO18)	Backlight Enable active Low. Higher duty cycles result in lower brightness. Frequency between 1k and 1-kHz. (Raspberry Pi: GPIO18)
13	GPIO27	Raspberry Pi: GPIO27
14	GND	Raspberry Pi: GND
15	GPIO22	Raspberry Pi: GPIO22
16	GPIO23	Raspberry Pi: GPIO23
17	3.3V	TFT Module Power limit can only output 3.3V,100mA
18	GPIO24	Raspberry Pi: GPIO24
19	GPIO10	Raspberry Pi: GPIO10
20	GND	Raspberry Pi: GND
21	GPIO09	Raspberry Pi: GPIO09
22	GPIO25	Raspberry Pi: GPIO25
23	GPIO11	Raspberry Pi: GPIO11
24	GPIO08	Raspberry Pi: GPIO08
25	GND	Raspberry Pi: GND
26	GPIO07	Raspberry Pi: GPIO07
27	ID_SD	Raspberry Pi: ID_SD
28	ID_SC	Raspberry Pi: ID_SC
29	GPIO05	Raspberry Pi: GPIO05
30	GND	Raspberry Pi: GND
31	GPIO06	Raspberry Pi: GPIO06
32	GPIO12	Raspberry Pi: GPIO12
33	GPIO13	Raspberry Pi: GPIO13
34	GND	Raspberry Pi: GND
35	GPIO19	Raspberry Pi: GPIO19
36	GPIO16	Raspberry Pi: GPIO16
37	GPIO26	Raspberry Pi: GPIO26
38	GPIO20	Raspberry Pi: GPIO20
39	GND	Raspberry Pi: GND
40	GPIO21	Raspberry Pi: GPIO21



## 6.2. CON5

Pin	Symbol	Function
1	NC	No Connection
2	5V	Raspberry Pi: Power 5V
3	GPIO02	Raspberry Pi: GPIO02
4	5V	Raspberry Pi: Power 5V
5	GPIO03	Raspberry Pi: GPIO03
6	GND	Raspberry Pi: GND
7	GPIO04	Raspberry Pi: GPIO04
8	GPIO14	Raspberry Pi: GPIO14
9	GND	Raspberry Pi: GND
10	GPIO15	Raspberry Pi: GPIO15
11	GPIO17	Raspberry Pi: GPIO17
12	BL-PWM (GPIO18)	Backlight Enable active Low. Higher duty cycles result in lower brightness. Frequency between 1k and 1-kHz. (Raspberry Pi: GPIO18)
13	GPIO27	Raspberry Pi: GPIO27
14	GND	Raspberry Pi: GND
15	GPIO22	Raspberry Pi: GPIO22
16	GPIO23	Raspberry Pi: GPIO23
17	NC	No Connection
18	GPIO24	Raspberry Pi: GPIO24
19	GPIO10	Raspberry Pi: GPIO10
20	GND	Raspberry Pi: GND
21	GPIO09	Raspberry Pi: GPIO09
22	GPIO25	Raspberry Pi: GPIO25
23	GPIO11	Raspberry Pi: GPIO11
24	GPIO08	Raspberry Pi: GPIO08
25	GND	Raspberry Pi: GND
26	GPIO07	Raspberry Pi: GPIO07
27	ID_SD	Raspberry Pi: ID_SD
28	ID_SC	Raspberry Pi: ID_SC
29	GPIO05	Raspberry Pi: GPIO05
30	GND	Raspberry Pi: GND
31	GPIO06	Raspberry Pi: GPIO06
32	GPIO12	Raspberry Pi: GPIO12
33	GPIO13	Raspberry Pi: GPIO13
34	GND	Raspberry Pi: GND
35	GPIO19	Raspberry Pi: GPIO19
36	GPIO16	Raspberry Pi: GPIO16
37	GPIO26	Raspberry Pi: GPIO26
38	GPIO20	Raspberry Pi: GPIO20
39	GND	Raspberry Pi: GND
40	GPIO21	Raspberry Pi: GPIO21






### 6.3. HDMI Connector (DVI only)

Pin	Symbol	Function
1	Rx2+	+LVDS Differential Data Input
2	GND	Ground
3	Rx2-	- LVDS Differential Data Input
4	Rx1+	+ LVDS Differential Data Input
5	GND	Ground
6	Rx1-	- LVDS Differential Data Input
7	Rx0+	+ LVDS Differential Data Input
8	GND	Ground
9	Rx0-	- LVDS Differential Data Input
10	RxC+	+ LVDS Differential Clock Input
11	GND	Ground
12	RxC-	- LVDS Differential Clock Input
13	NC	No Connect
14	NC	No Connect
15	SCL	Data Display Channel (DDC) Clock
16	SDA	Data Display Channel (DDC) Data
17	GND	Ground
18	5V	Power Supply
19	Detect	Hot plug detect

### 6.4. Power Jack

Pin	Symbol	Function
1	5V	Power Supply (5v)
2	GND	Ground

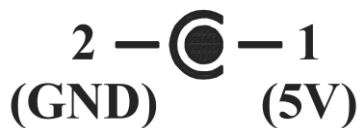

Inner pin is 2mm diameter, inner hole is 6.4mm diameter.

Power Jack should supply 5v at 3A.

## 7. Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit	Notes
Operating Temperature	T <sub>OP</sub>	-20	+70	°C	-
Storage Temperature	T <sub>STG</sub>	-30	+80	°C	-



## 8. Electrical Characteristics

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Voltage for LCM	V <sub>DD</sub>	-	4.9	5.0	5.1	V
Supply Current for LCM	I <sub>DD</sub>	V <sub>DD</sub> = 5.0V T <sub>A</sub> = 25°C	-	1.5	2.3	A
LED Lifetime	-	I <sub>L</sub> = 480mA T <sub>A</sub> = 25°C	50,000	-	-	Hours

## 9. Optical Characteristics

Item	Symbol	Condition	Min	Typ	Max	Unit	
Viewing Angle	Hor.	Θ <sub>R</sub>	CR ≥ 10	70	80	-	Degree
		Θ <sub>L</sub>		70	80	-	
	Ver.	Φ <sub>T</sub>		70	80	-	
		Φ <sub>B</sub>		70	80	-	
Contrast Ratio	CR	At Optimized Viewing Angle	800	1000	-	-	
Response Time	T <sub>R</sub> +T <sub>F</sub>	θ=0°, Φ=0	-	25	35	ms	
Brightness	-	Center of Display	1000	1100	-	cd/m <sup>2</sup>	
Color Chromaticity	White	W <sub>x</sub>	θ=0°, Φ=0	0.272	0.322	0.372	-
		W <sub>y</sub>		0.294	0.344	0.394	

## 10. LCD Module Precautions

The precautions below should be followed when using LCD modules to help ensure personal safety, module performance, and compliance of environmental regulations.

### 10.1. Modules


- Avoid applying excessive shocks to module or making any alterations or modifications to it.
- Do not make extra holes on the printed circuit board, modify its shape or change the components of LCD display module.
- Do not disassemble the LCD display module.
- Do not operate the LCD display module above the absolute maximum rating.
- Do not drop, bend or twist the LCD display module.
- Soldering: only to the I/O terminals.
- Store in an anti-static electricity container and clean environment.
- It is common to use the "screen saver" to extend the lifetime of the LCD display module.
  - Do not use the fixed information for long periods of time in real application.
  - Do not use fixed information in LCD panel for long periods of time to extend "screen burn" effect time.
- Crystalfontz has the right to change the passive components, including R2 and R3 adjust resistors. (Resistors, capacitors and other passive components will have different appearance and color caused by the different supplier.)
- Crystalfontz have the right to change the PCB Rev. (In order to satisfy the supplying stability, management optimization and the best product performance, etc., under the premise of not affecting the electrical characteristics and external dimensions, Crystalfontz has the right to modify the version.)

### 10.2. Handling Precautions

- Since the display panel is made of glass, do not apply mechanical impacts such as dropping from a high position.



- If the display panel is accidentally broken, and the internal organic substance leaks out, be careful not to inhale or touch the organic substance.
- If pressure is applied to the display surface or its neighborhood of the LCD display module, the cell structure may be damaged, so be careful not to apply pressure to these sections.
- The polarizer covering the surface of the LCD display module is soft and can be easily scratched. Please be careful when handling the LCD display module.
- Clean the surface of the polarizer covering the LCD display module if it becomes soiled using following adhesion tape.
  - Scotch Mending Tape No. 810 or an equivalent
  - Never breathe the soiled surface or wipe the surface using a cloth containing solvent such as ethyl alcohol, since the surface of the polarizer will become cloudy.
  - The following liquids/solvents may spoil the polarizer:
    - Water
    - Ketone
    - Aromatic Solvents
- Hold the LCD display module very carefully when placing the LCD display module into the system housing.
- Do not apply excessive stress or pressure to the LCD display module. And, do not over bend the film with electrode pattern layouts. These stresses will influence the display performance. Also, be sure to secure the sufficient rigidity for the outer cases.

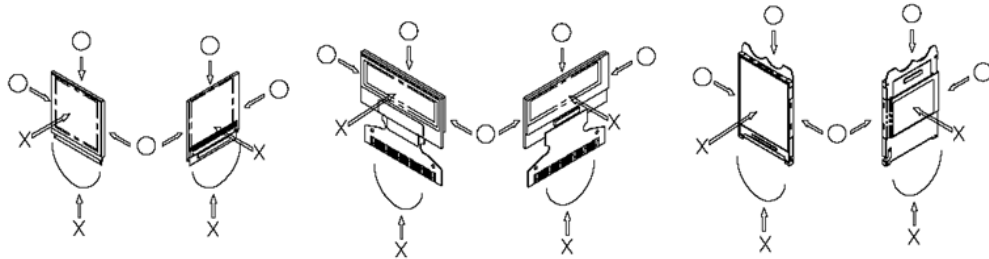

- Do not apply stress to the LSI chips and the surrounding molded sections.
- Do not disassemble or modify the LCD display module.
- Do not apply input signals while the logic power is off.
- Pay sufficient attention to the working environments when handling the LCD display module to prevent occurrence of element breakage accidents by static electricity.
  - Be sure to make human body grounding when handling LCD display modules.
  - Be sure to ground tools to use for assembly such as soldering irons.
  - To suppress generation of static electricity, avoid carrying out assembly work under dry environments.
  - Protective film is being applied to the surface of the display panel of the LCD display module. Be careful since static electricity may be generated when exfoliating the protective film.
- Protection film is being applied to the surface of the display panel and removes the protection film before assembling it. At this time, if the LCD display module has been stored for a long period of time, residue adhesive material of the protection film may remain on the surface of the display panel after the film has been removed. In such a case, remove the residue material by the method discussed above.
- If electric current is applied when the LCD display module is being dewed or when it is placed under high humidity environments, the electrodes may become corroded. If this happens proceed with caution when handling the LCD display module.

### 10.3. Storage Precautions

- When storing the LCD display modules put them in static electricity preventive bags to avoid exposure to direct sunlight and fluorescent lamps. Also avoid high temperature and high humidity environments and low temperatures (less than 0°C) environments. (We recommend you store these modules in the packaged state when they were shipped from Crystalfontz). Be careful not to let water drops adhere to the packages or bags, and do not let dew gather on them.



- If electric current is applied when water drops are adhering to the surface of the LCD display module the LCD display module may have become dewed. If a dewed LCD display module is placed under high humidity environments it may cause the electrodes to become corroded. If this happens proceed with caution when handling the LCD display module.

#### 10.4. Designing Precautions

- The absolute maximum ratings are the ratings that cannot be exceeded for LCD display module. If these values are exceeded, panel damage may happen.
- To prevent occurrence of malfunctioning by noise pay attention to satisfy the  $V_{IL}$  and  $V_{IH}$  specifications and, at the same time, to make the signal line cable as short as possible.
- We recommend that you install excess current preventive unit (fuses, etc.) to the power circuit ( $V_{DD}$ ). (Recommend value: 0.5A)
- Pay sufficient attention to avoid occurrence of mutual noise interference with the neighboring devices.
- As for EMI, take necessary measures on the equipment side.
- When fastening the LCD display module, fasten the external plastic housing section.
- If the power supply to the LCD display module is forcibly shut down, by such errors as taking out the main battery while the LCD display panel is in operation, we cannot guarantee the quality of this LCD display module.
  - Connection (contact) to any other potential than the above may lead to rupture of the IC.

#### 10.5. Disposing Precautions

- Request the qualified companies to handle the industrial wastes when disposing of the LCD display modules. Or, when burning them, be sure to observe the environmental and hygienic laws and regulations.

#### 10.6. Other Precautions

- When an LCD display module is operated for a long period of time with a fixed pattern, the fixed pattern may remain as an after image or a slight contrast deviation may occur.
  - If the operation is interrupted and left unused for a while, normal state can be restored.
  - This will not cause a problem in the reliability of the module.
- To protect the LCD display module from performance drops by static electricity rapture, etc., do not touch the following sections whenever possible while handling the LCD display modules.
  - Pins and electrodes
  - Pattern layouts such as the TCP & FPC
- With this LCD display module, the LCD driver is being exposed. Generally speaking, semiconductor elements change their characteristics when light is radiated according to the principle of the solar battery. Consequently, if this LCD driver is exposed to light, malfunctioning may occur.
  - Design the product and installation method so that the LCD driver may be shielded from light in actual usage.
  - Design the product and installation method so that the LCD driver may be shielded from light during the inspection processes.
- Although this LCD display module stores the operation state data by the commands and the indication data, when excessive external noise, etc. enters into the module, the internal status may be changed. Therefore, it is necessary to take appropriate measures to suppress noise generation or to protect from influences of noise on the system design.
- We recommend that you construct its software to make periodical refreshment of the operation statuses (re-setting of the commands and re-transference of the display data), to cope with catastrophic noise.
- Resistors, capacitors, and other passive components will have different appearance and color caused by the different supplier.
- Crystalfontz has the right to upgrade and modify the product function.
- The limitation of FPC bending:

