

# *Crystalfontz America, Inc.*

## **SPECIFICATION**

**CUSTOMER :** \_\_\_\_\_

**MODULE NO.:** CFAG12864I-YYH-TN

<b>SALES BY</b>	<b>APPROVED BY</b>	<b>CHECKED BY</b>	<b>PREPARED BY</b>
<b>ISSUED DATE:</b>			

### **Crystalfontz America, Inc.**

12412 East Saltese Avenue  
Spokane Valley, WA 99216-0357

Phone: (888) 206-9720

Fax: (509) 892-1203

Email: [techinfo@crystalfontz.com](mailto:techinfo@crystalfontz.com)

URL: [www.crystalfontz.com](http://www.crystalfontz.com)

# Contents

- 1.Module classification information
- 2.Precautions in Use of LCM
- 3.General Specification
- 4.Absolute Maximum Ratings
- 5.Electrical Characteristics
- 6.Optical Characteristics
- 7.Interface Pin Function
- 8.Counter Drawing and Block Diagram
- 9.Timing Characteristics
- 10.Display Control Instruction
- 11.Detailed Explanation
- 12.Reliability
- 13.Backlight Information

# 1.Module Classification Information

CFA G 12864 I— YYH— TN

①            ②            ③            ④            ⑤⑥⑦            ⑧

①	Brand <b>Crystalfontz America, Inc.</b>	
②	Display Type H→Character Type, <b>G→Graphic Type</b>	
③	Display Font <b>128 dots x 64 dots</b>	
④	Model Identifier. <b>I</b>	
⑤	Backlight Type	N→Without backlight B→EL, Blue green D→EL, Green W→EL, White F→CCFL, White <b>Y→LED, Yellow Green</b> T→LED, White A→LED, Amber R→LED, Red O→LED, Orange G→LED, Green
⑥	LCD Mode	B→TN Positive, Gray N→TN Negative, G→STN Positive, Gray <b>Y→STN Positive, Yellow Green</b> M→STN Negative, Blue F→FSTN Positive T→FSTN Negative
⑦	LCD Polarizer Type/ Temperature range/ View direction	A→Reflective, N.T, 6:00 D→Reflective, N.T, 12:00 G→Reflective, W. T, 6:00 J→Reflective, W. T, 12:00 B→Transflective, N.T,6:00 E→Transflective, N.T.12:00 <b>H→Transflective, W.T,6:00</b> K→Transflectiv, W.T,12:00 C→Transmissive, N.T,6:00 F→Transmissive, N.T,12:00 I→Transmissive, W. T, 6:00 L→Transmissive,W.T,12:00
⑧	Special Code	T : Negative Voltage generator on board and temperature compensation N : IC NT7107,NT7108

## 2.Precautions in Use of LCD Module

- (1) Avoid applying excessive shocks to the module or making any alterations or modifications.
- (2) Don't make extra holes on the printed circuit board, modify its shape, or change the components of LCD Module.
- (3) Don't disassemble the LCM.
- (4) Don't operate it above the absolute maximum rating.
- (5) Don't drop, bend or twist LCM.
- (6) Solder:only to the I/O terminals.
- (7) Store in antistatic container and clean enviroment.

## 3.General Specification

ITEM	STANDARD VALUE	UNIT
Number of dots	128 ×64	dots
Module dimension	80.0(W) ×70.0(H) ×13.6(D)	mm
View area	72.0(W) ×40.0(H)	mm
Active area	66.52(W) ×33.24(H)	mm
Dot size	0.48(W) ×0.48(H)	mm
Dot pitch	0.52(W) ×0.52(H)	mm
LCD type	STN Positive, Yellow Green, Transflective	
View direction	6 o'clock	
Backlight	LED , yellow green	

## 4. Absolute Maximum Ratings

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT
Operating Temperature	$T_{OP}$	-20°C		+70°C	□
Storage Temperature	$T_{ST}$	-30°C		+80°C	□
Input Voltage	$V_I$	0		$V_{CC}$	V
Supply Voltage For Logic	$V_{DD}$	0		6.7	V
Supply Voltage For LCD	$V_{DD}-V_{LCD}$	0		16.7	V
Supply Voltage For LCD	$V_{OUT}$			-5	V

## 5. Electrical Characteristics


ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Voltage For Logic	$V_{DD}-V_{SS}$		4.5	5.0	5.5	V
Supply Voltage For LCD	$V_{DD}-V_0$	$T_a=-20^{\circ}\text{C}$			10.5	V
		$T_a=25^{\circ}\text{C}$		8.7		V
		$T_a=+70^{\circ}\text{C}$	7.6			V
Input High Vol	$V_{IH}$		2.0		$V_{DD}$	V
Input Low Vol	$V_{IL}$		0		0.8	V
Output High Vol	$V_{OH}$		2.4		$V_{DD}$	V
Output Low Vol.	$V_{OL}$		0		0.4	V
Supply Current	$I_{DD}$		3.0	4.0	5.0	mA

## 6. Optical Characteristics

ITEM	SYMBOL	CONDITION	MIN	TYP	MAX	UNIT
View Angle	(V) $\theta$	$CR \geq 2$	20		40	deg.
	(H) $\phi$	$CR \geq 2$	-30		30	deg.
Contrast Ratio	CR			3		
Response Time	T rise			200	300	ms
	T fall			200	300	ms


### 6.1 Definitions

#### View Angles

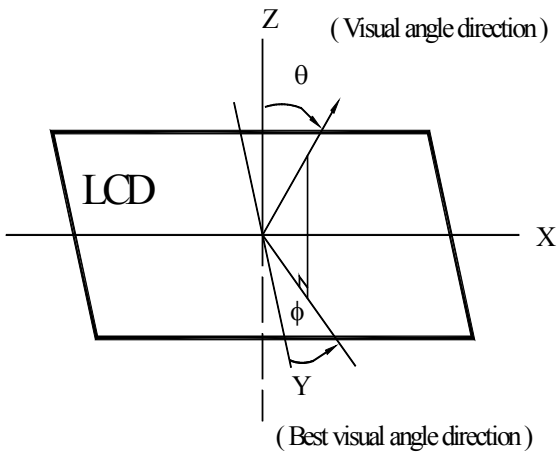


#### Contrast Ratio

$$CR = \frac{\text{Brightness at selected state (BS)}}{\text{Brightness at non-selected state (Bns)}}$$

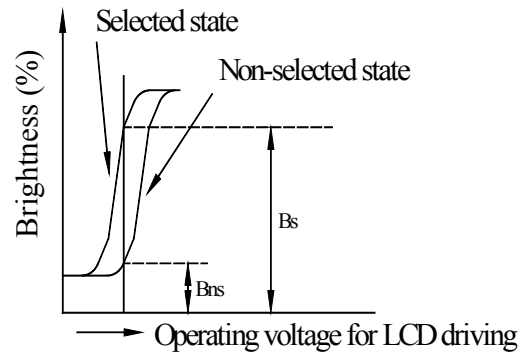

# Response Time

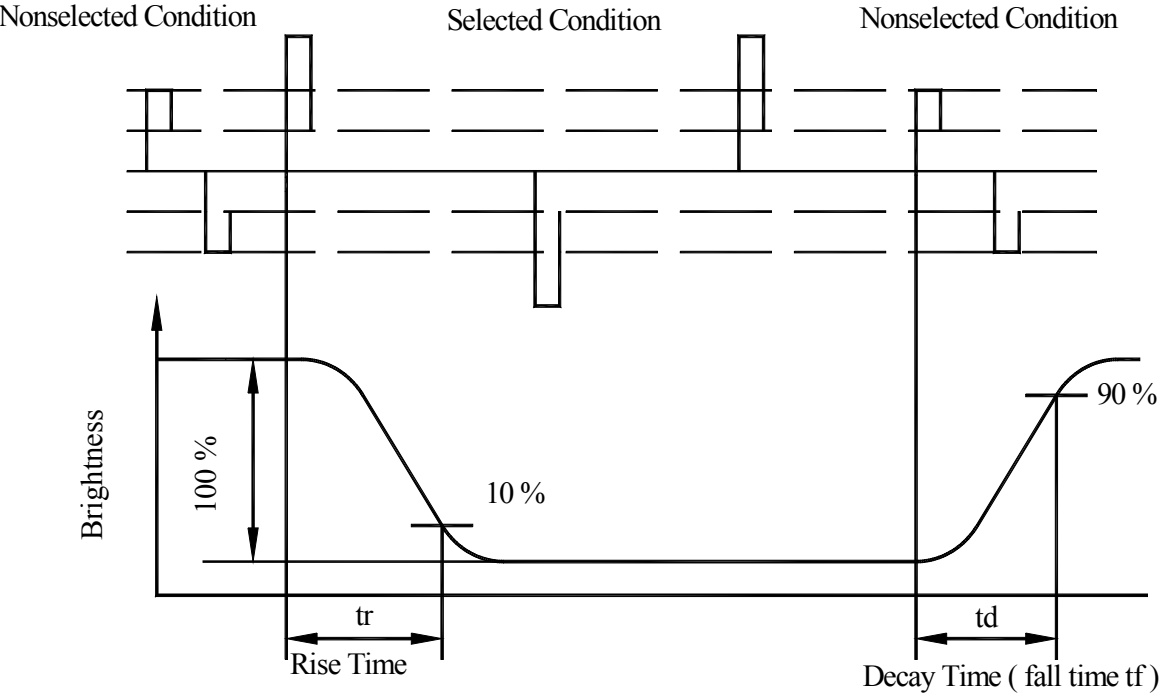


## 7.Interface Pin Function


Pin No.	Symbol	Level	Description
1	VSS	0V	Ground
2	V <sub>DD</sub>	5.0V	Supply voltage for logic
3	V <sub>O</sub>	(Variable)	Contrast Adjustment
4	D/I	H/L	H: Data , L: Instruction
5	R/W	H/L	H: Read(MPU←Module) , L :Write(MPU→Module)
6	E	H	Enable signal
7	DB0	H/L	Data bus line
8	DB1	H/L	Data bus line
9	DB2	H/L	Data bus line
10	DB3	H/L	Data bus line
11	DB4	H/L	Data bus line
12	DB5	H/L	Data bus line
13	DB6	H/L	Data bus line
14	DB7	H/L	Data bus line
15	CS1	H	Select Column 1 ~ Column 64
16	CS2	H	Select Column 65 ~ Column 128
17	RST	L	Reset signal
18	Vout		Negative Voltage
19	A		Power supply for LED backlight ( + )
20	K		Power supply for LED backlight ( - )



# 8. Contour Drawing & Block Diagram

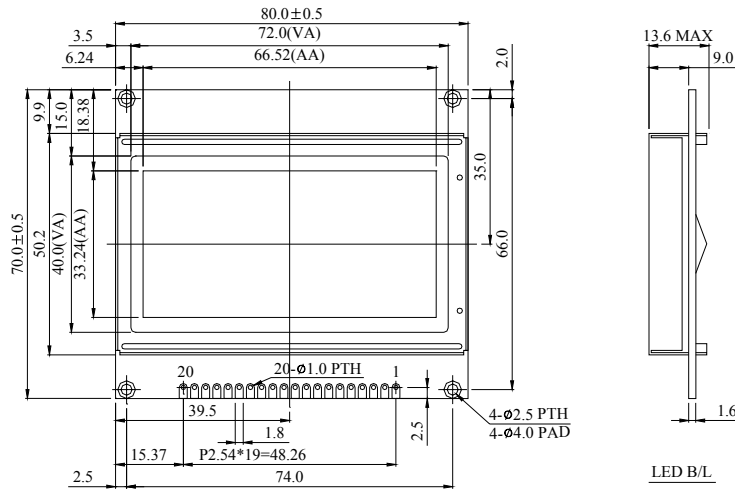


PIN NO.	SYMBOL
1	Vss
2	Vdd
3	Vo
4	D/I
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	CS1
16	CS2
17	RES
18	Vee
19	A
20	K



DOT SIZE

The non-specified tolerance of dimension is  $\pm 0.3\text{mm}$ .

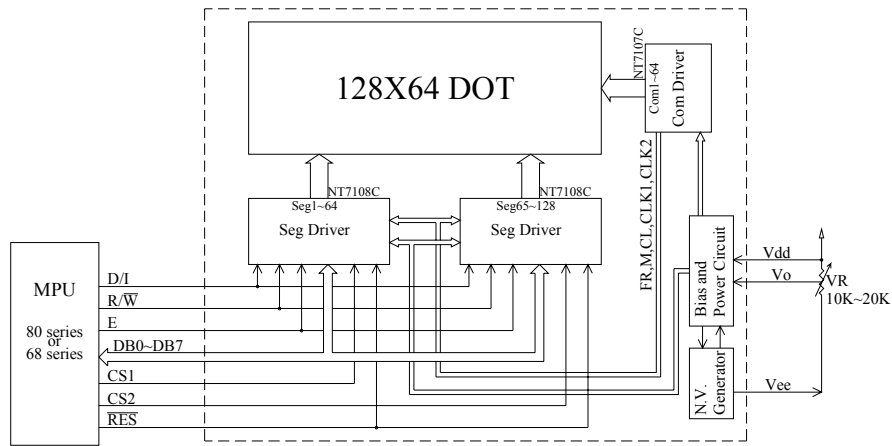


External contrast adjustment.

# 9. Timing Characteristics


## MPU Interface

Characteristic	Symbol	Min	Typ	Max	Unit
E cycle	tcyc	1000			ns
E high level width	twhE	450			ns
E low level width	twlE	450			ns
E rise time	tr			25	ns
E fall time	tf			25	ns
Address set-up time	tas	140			ns
Address hold time	tah	10			ns
Data set-up time	tdsw	200			ns
Data delay time	tddr			320	ns
Data hold time (write)	tdhw	10			ns
Data hold time (read)	tdhr	20			ns

### MPU Write Timing

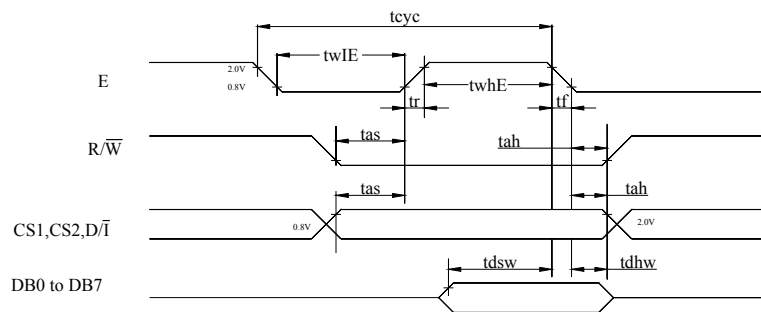

### MPU Read Timing

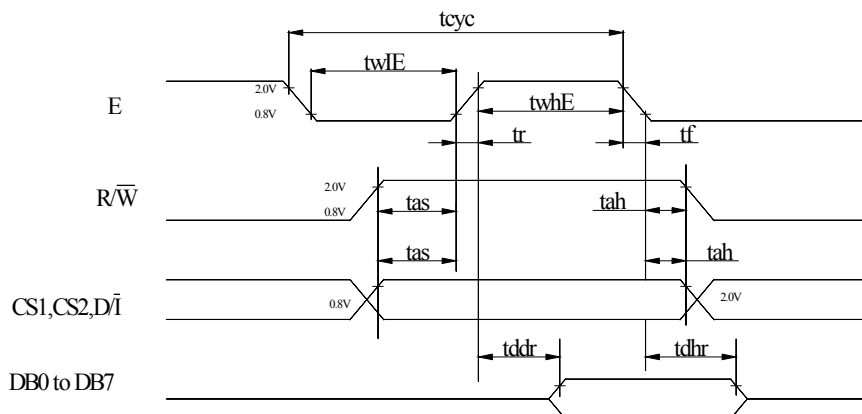

## 10. Display Control Instruction

The display control instructions control the internal state of the NT7108. Instruction is received from MPU to NT7108 for the display control. The following table shows various instructions.

Instruction	RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0	Function	
Display on/off	L	L	L	L	H	H	H	H	H	L/H	Controls the display on or off. Internal status and display RAM data is not affected. L: OFF, H: ON	
Set address (Y address)	L	L	L	H	Y address (0-63)						Sets the Y address in the Y address counter.	
Set page (X address)	L	L	H	L	H	H	H	Page (0-7)			Sets the X address at the X address register.	
Display Start line (Z address)	L	L	H	H	Display start line (0-63)						Indicates the display data RAM displayed at the top of the screen.	
Status read	L	H	Busy	L	On/Off	Reset	L	L	L	L	Read status. BUSY L: Ready H: In operation ON/OFF L: Display ON H: Display OFF RESET L: Normal H: Reset	
Write display data	H	L	Write data									Writes data (DB0: 7) into display data RAM. After writing instruction, Y address is increased by 1 automatically.
Read display data	H	H	Read data									Reads data (DB0: 7) from display data RAM to the data bus.

## 11. Detailed Explanation

RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
0	0	0	0	1	1	1	1	1	D

The display data appears when D is 1 and disappears when D is 0. Though the data is not on the screen with D=0, it remains in the display data RAM. Therefore, you can make it appear by changing D=0 into D=1.

### SET ADDRESS (Y ADDRESS)

RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
0	0	0	1	AC5	AC4	AC3	AC2	AC1	AC0

Y address (AC0-AC5) of the display data RAM is set in the Y address counter. An address is set by instruction and increased by 1 automatically by read or write operations of display data.

### SET PAGE (X ADDRESS)

RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
0	0	1	0	1	1	1	AC2	AC1	AC0

X address (AC0-AC2) of the display data RAM is set in the X address register. Writing or reading to or from MPU is executed in this specified page until the next page is set.

### DISPLAY START LINE (Z ADDRESS)

RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
0	0	1	1	AC5	AC4	AC3	AC2	AC1	AC0

Z address (AC0-AC5) of the display data RAM is set in the display start line register and displayed at the top of the screen. When the display duty cycle is 1/64 or others (1/32-1/64), the data of total line number of LCD screen, from the line specified by display start line instruction, is displayed.

### STATUS READ

RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
0	1	BUSY	0	ON/OFF	RESET	0	0	0	0

#### *BUSY*

When BUSY is 1, the Chip is executing internal operation and no instructions are accepted.

When BUSY is 0, the Chip is ready to accept any instructions.

### *ON/OFF*

When ON/OFF is 1, the display is OFF.

When ON/OFF is 0, the display is ON.

### *RESET*

When RESET is 1, the system is being initialized.

In this condition, no instructions except status read can be accepted.

When RESET is 0, initializing has finished and the system is in usual operation condition.

### **WRITE DISPLAY DATA**

<b>RS</b>	<b>R/W</b>	<b>DB7</b>	<b>DB6</b>	<b>DB5</b>	<b>DB4</b>	<b>DB3</b>	<b>DB2</b>	<b>DB1</b>	<b>DB0</b>
1	0	D7	D6	D5	D4	D3	D2	D1	D0

Writes data (D0-D7) into the display data RAM. After writing instruction, Y address is increased by 1 automatically.

### **READ DISPLAY DATA**

<b>RS</b>	<b>R/W</b>	<b>DB7</b>	<b>DB6</b>	<b>DB5</b>	<b>DB4</b>	<b>DB3</b>	<b>DB2</b>	<b>DB1</b>	<b>DB0</b>
1	1	D7	D6	D5	D4	D3	D2	D1	D0

Reads data (D0-D7) from the display data RAM. After reading instruction, Y address is increased by 1 automatically.

# 12. Reliability

## Content of Reliability Test (wide temperature, -20°~70°)

Environmental Test			
Test Item	Content of Test	Test Condition	Note
High Temperature storage	Endurance test applying the high storage temperature for a long time.	80° 200hrs	2
Low Temperature storage	Endurance test applying the high storage temperature for a long time.	-30° 200hrs	1,2
High Temperature Operation	Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time.	70° 200hrs	—
Low Temperature Operation	Endurance test applying the electric stress under low temperature for a long time.	-20° 200hrs	1
High Temperature/ Humidity Operation	The module should be allowed to stand at 60°, 90%RH max For 96hrs under no-load condition excluding the polarizer, Then taking it out and drying it at normal temperature.	60°, 90%RH 96hrs	1,2
Thermal shock resistance	The sample should be allowed stand the following 10 cycles of operation -20° 25° 70° 30min 5min 30min 1 cycle	-20°/70° 10 cycles	—
Vibration test	Endurance test applying the vibration during transportation and using.	Total fixed amplitude : 1.5mm Vibration Frequency : 10~55Hz One cycle 60 seconds to 3 directions of X,Y,Z for Each 15 minutes	3
Static electricity test	Endurance test applying the electric stress to the terminal.	VS=800V,RS=1.5kΩ CS=100pF 1 time	—

Note 1: No condensation to be observed.

Note 2: The function test shall be conducted after 4 hours storage at the normal Temperature and humidity after remove from the test chamber.

Note 3: Vibration test conducted to the product itself without putting it in a container.

## 13.Backlight Information

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	TEST CONDITION
Supply Current	I <sub>LED</sub>	260	330	480	mA	V=4.2V
Supply Voltage	V	4.0	4.2	4.4	V	
Reverse Voltage	V <sub>R</sub>			10	V	
Luminous Intensity	I <sub>V</sub>	150	186.6		CD/M2	I <sub>LED</sub> =330mA
Wave Length	λ <sub>p</sub>	560	570	580	nm	I <sub>LED</sub> =330mA
Life Time			100000		Hr.	I <sub>LED</sub> =330mA
Color	Yellow Green					

Note: The LED backlight is driven by current only. Drive voltage is for reference only. Drive voltage can make driving current under safety area (current between minimum and maximum).