

# CHARACTER LCD MODULE DATASHEET



Datasheet Release Date 2020-12-11

For

CFAH1602L-GGH-JT

**Revision B0** 

# **Crystalfontz America, Inc.**

12412 East Saltese Avenue Spokane Valley, WA 99216-0357 Phone: 888-206-9720 Fax: 509-892-1203

Email: <a href="mailto:support@crystalfontz.com">support@crystalfontz.com</a>
URL: <a href="mailto:support@crystalfontz.com">www.crystalfontz.com</a>



# **CONTENTS**

1. General Information	3
2. Module Description	4
3. Features	4
4. Mechanical Data	4
5. Mechanical Drawing	5
6. System Block Diagram	6
7. Vo Connection for Display Contrast	
8. Interface Pin Function	7
9. Absolute Maximum Ratings	7
10. Electrical Characteristics	
11. Optical Characteristics	8
12. Backlight Information	9
13. DDRAM Tables	9
14. Character Generator ROM (CGROM)	10
15 LCD Module Precautions	11



### 1. General Information

#### **Datasheet Revision History**

Datasheet Release: 2020-12-11

Datasheet for the CFAH1602L-GGH-JT character LCD display module.

#### **Product Change Notifications**

You can check for or subscribe to Part Change Notices for this display module on our website.

#### **Variations**

Slight variations between lots are normal (e.g., contrast, color, or intensity).

#### Volatility

This display module has volatile memory.

#### **Disclaimer**

Certain applications using Crystalfontz America, Inc. products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications"). CRYSTALFONTZ AMERICA, INC. PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. Inclusion of Crystalfontz America, Inc. products in such applications is understood to be fully at the risk of the customer. In order to minimize risks associated with customer applications, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazard. Please contact us if you have any questions concerning potential risk applications.

Crystalfontz America, Inc. assumes no liability for applications assistance, customer product design, software performance, or infringements of patents or services described herein. Nor does Crystalfontz America, Inc. warrant or represent that any license, either express or implied, is granted under any patent right, copyright, or other intellectual property right of Crystalfontz America, Inc. covering or relating to any combination, machine, or process in which our products or services might be or are used.

All specifications in datasheets on our website are, to the best of our knowledge, accurate but not guaranteed. Corrections to specifications are made as any inaccuracies are discovered.

Company and product names mentioned in this publication are trademarks or registered trademarks of their respective owners.

Copyright © 2020 by Crystalfontz America, Inc.,12412 East Saltese Avenue, Spokane Valley, WA 99216 U.S.A.



# 2. Module Description

This is a 16 character by 2-lines gray LCD display with a green LED backlight. This display has a built-in Sitronix ST7066U controller. The Sitronix ST7066U controller is compatible with the industry standard Hitachi HD44780 controller.

Please see Sitronix ST7066U LCD Controller Datasheet for further reference.

### 3. Features

- Built-in Controller: ST7066U (or equivalent)
- STN Positive, Gray, Transflective Mode
- Green LED Backlight
- +5v Power Supply
- Viewing Direction: 6 o'clock
- 1/16 Duty


Temperature Operation: -20°C to +70°C
Storage Operation: -30°C to +80°C
Interface: 4-Bit / 8-Bit Parallel

### 4. Mechanical Data

Item	Specification (mm)	Specification (inch, reference)				
0 11347114	, ,	,				
Overall Width and Height	122.0 (W) x 44.0 (H) x 13.6 (D)	4.803 (W) x 1.732 (H) x 0.535 (D)				
Viewing Area	99.0 (W) x 24.0 (H)	3.898 (W) x 0.945 (H)				
Active Area	94.8 (W) x 20.0 (H)	3.732 (W) x 0.787 (H)				
Character Size	4.84 (W) x 8.06 (H)	0.191 (W) x 0.317 (H)				
Character Pitch	6.0 (W) x 10.34 (H)	0.236 (W) x 0.407 (H)				
Dot Size	0.92 (W) x 1.1 (H)	0.036 (W) x 0.043 (H)				
Dot Pitch	0.98 (W) x 0.1.16 (H)	0.039 (W) x 0.046 (H)				
Weight (Typical)	66 grams	2.33 ounces				




# 5. Mechanical Drawing

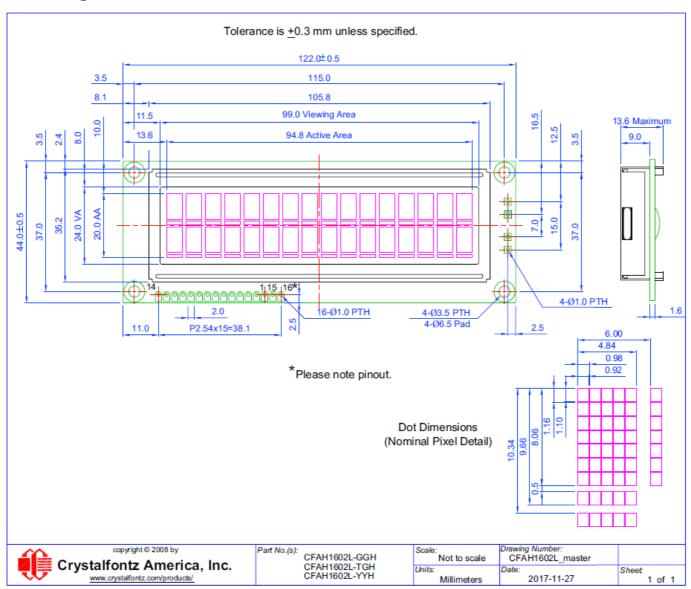



# 6. System Block Diagram

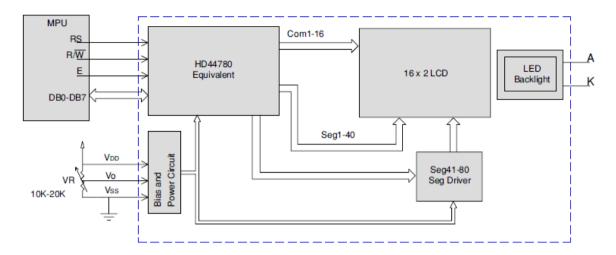


# 7. Vo Connection for Display Contrast

Crystalfontz recommends allowing field adjustment of  $V_0$  for all designs. The optimal value of  $V_0$  varies with temperature, variations in  $V_{DD}$ , and viewing angle.  $V_0$  will also vary module-to-module and batch-to-batch due to normal manufacturing variations. If exposing adjustments to  $V_0$  is not possible, Crystalfontz recommends enabling adjustment of  $V_0$  as part of a product's final test.

Although a potentiometer is shown as a typical connection,  $V_0$  can be driven by a microcontroller, using either a DAC or a filtered PWM. Displays that require  $V_0$  to be negative may require a level shifting circuit

Start with an initial value of  $V_0 = +1v$  ( $V_{LCD} = +4v$ ), and adjust from there.





## 8. Interface Pin Function

Pin No.	Symbol	Level	Direction	Function
1	Vss	0v	-	Ground
2	$V_{DD}$	5.0v	-	Supply Voltage for Logic
3	Vo	(variable)	-	Supply Voltage for LCD
4	RS	H/L	I	H: Data L: Instruction Code
5	R/W	H/L	I	H: Read (Host   ─ Module) L: Write (Host    ➤ Module)
6	Е	H, H <b>→</b> L	1	Chip Enable Signal
7	DB0	H/L	I/O	Data Bus Line
8	DB1	H/L	I/O	Data Bus Line
9	DB2	H/L	I/O	Data Bus Line
10	DB3	H/L	I/O	Data Bus Line
11	DB4	H/L	I/O	Data Bus Line
12	DB5	H/L	I/O	Data Bus Line
13	DB6	H/L	I/O	Data Bus Line
14	DB7	H/L	I/O	Data Bus Line
15	A (LED+)	-	-	Power Supply for B/L (+)
16	K (LED-)	-	-	Power Supply for B/L (-)

# 9. Absolute Maximum Ratings

Parameter	Symbol	Min	Тур	Max	Unit	Notes
Supply Voltage for Logic	V <sub>DD</sub> -V <sub>SS</sub>	-0.3	•	7	V	(1)(2)
Supply Voltage for LCD	V <sub>DD</sub> -V <sub>O</sub>	-0.3	•	13	V	(1)(2)
Input Voltage	Vı	Vss	-	$V_{DD}$	V	-
Operating Temperature	T <sub>OP</sub>	-20	-	+70	°C	-
Storage Temperature	T <sub>ST</sub>	-30	-	+80	°C	-

#### Notes:

<sup>(1)</sup> These are stress ratings only. Extended exposure to the absolute maximum ratings listed above may affect device reliability or cause permanent damage.

(2) Functional operation should be restricted to the limits in the Electrical Characteristics table below.



# 10. Electrical Characteristics

		5V	Operation	on			
Item	Symbol	Condition	Min	Тур	Max	Unit	Notes
Supply Voltage for Logic	V <sub>DD</sub> -V <sub>SS</sub>	-	4.5	5.0	5.5	V	-
Supply Voltage for		Ta=20°C	-	-	4.2		
LCD	V <sub>DD</sub> -V <sub>O</sub>	Ta=25°C	-	3.8	-	V	-
LGB		Ta=70°C	3.6	-	-		
Input High Voltage	V <sub>IH</sub>	$V_{DD} = 5V$	3.5	-	$V_{DD}$	V	Pins: E, RS, R/W, DB0-DB7
Input Low Voltage	VIL	-	-	-	0.6	V	-
Output High Voltage	Vон	V <sub>DD</sub> = 5V	3.7	-	-	V	I <sub>OH</sub> =0.1 mA Pins: DB0-DB7
Output Low Voltage	V <sub>OL</sub>	-	-	-	0.4	V	I <sub>OL</sub> =0.1 mA Pins: DB0-DB7
Supply Current	I <sub>DD</sub>	without backlight	-	1.2	-	mA	-

		3.3	V Operati	on			
Item	Symbol	Condition	Min	Тур	Max	Unit	Notes
Supply Voltage for Logic	V <sub>DD</sub> -V <sub>SS</sub>	-	2.7	3.3	4.5	V	-
Cupply Voltage for		Ta=20°C	-	-	4.2		
Supply Voltage for LCD	V <sub>DD</sub> -V <sub>O</sub>	Ta=25°C	-	3.8	-	V	-
LGB		Ta=70°C	3.6	-	-		
Input High Voltage	ViH	V <sub>DD</sub> = 3.3V	2.3	-	$V_{DD}$	V	Pins: E, RS, R/W, DB0-DB7
Input Low Voltage	VIL	-	-	-	0.6	٧	-
Output High Voltage	Vон	$V_{DD} = 3.3V$	2.4	-	-	V	I <sub>OH</sub> =0.1 mA Pins: DB0-DB7
Output Low Voltage	V <sub>OL</sub>	-	-	-	0.4	V	I <sub>OL</sub> =0.1 mA Pins: DB0-DB7
Supply Current	I <sub>DD</sub>	without backlight	-	1.2	-	mA	-

# 11. Optical Characteristics

Item	Symbol	Condition	Min	Тур	Max	Unit
Viou Anglo	(V)θ	CR≥2	10	-	105	deg
View Angle	(H)φ	CR≥2	-30	-	30	deg
Contrast Ratio	CR	-	-	3	-	-
	T rise	T <sub>A</sub> =25°C	-	150	200	ms
Response Time	T fall	T <sub>A</sub> =25°C	-	150	200	ms



# 12. Backlight Information

Parameter	Symbol	Condition	Min	Тур	Max	Unit	Notes
Forward Current	I <sub>LED</sub>	V=4.2v	-	260	-	mA	(1)
Forward Voltage	V <sub>LED</sub>	-	-	4.2	4.6	V	-
Reverse Voltage	VR	-	-	-	8	V	-
Luminance (without LCD)	lv	I <sub>LED</sub> =260mA	60	-	-	cd/m <sup>2</sup>	-
Wave Length	Iλ	I <sub>LED</sub> =260mA	-	557	-	nm	-
LED Lifetime	-	I <sub>LED</sub> =260mA 25°C, 50- 60% RH	-	50K	-	Hr.	(2)
Color	Green						

#### Notes:

## 13. DDRAM Tables

Please see Sitronix ST7066U LCD Controller Datasheet for further reference.

### **Display Position DDRAM Address**

The following table shows the relationship between the controller's addresses and the corresponding character location on the module

DDRAM Address DDRAM Address

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
00															
40	41	42	43	44	45	46	47	48	49	4A	4B	4C	4D	4E	4F

<sup>(1)</sup> Forward current minimum value is only for reference since the LED brightness efficiency keeps enhancing. Current consumption becomes less and less to achieve the same luminance.

<sup>(2)</sup> Lifetime is defined as the amount of time when the luminance has decayed to <50% of the initial value (50K hours is an estimate for reference only).



# 14. Character Generator ROM (CGROM)

Upper	Т			1						1						1
4 bit Lower 4 bit	LLLL	LLLH	LLHL						HLLL	HLLH	HLHL	нгнн	HHLL	HHLH	HHHL	нннн
LLLL	CG RAM (1)			55 55 55 55 55 55 55 55 55 55 55 55 55		5555 5555 5555 5555 5555 5555	5 5	5555 5555 5555 5555				5555	5555 5 5 5 5 55 5 55	555 555 555 555		99999999999999999999999999999999999999
LLLH	(2)		5555	55 55 55 55 55	55 55 55 55 55 55 55 55 55 55 55 55 55	5555 55 55 55 55 55 55 55 55	555 5555 5555	55 5 5 55 5 55 5 55 5			원원원 원 원 원원원	55555 555 555 55	5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	5 5 5 5 5 5 5 5 5 5 5	5 5 555 555 555 6	ASSES OF SECOND
LLHL	(3)		5 5 5 5	55 55 50 50 50 50 50 50 50 50 50 50 50 50 5	5055 5055 5055 5055 5055	55555 55555 55555 55555	5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	5 5 5 5 5 5 5 5 5 5 5			555 55 5	_	5555 5555 5	5 5		2000 2000 2000 2000
LLHH	(4)		50 50 50 50 50 50 50 50 50 50 50 50 50 5	55555 5 5 5 5 5	5555 55 55 55 55 55	5555 5 5555 5555	555 5 5 5 5 5 5	555 555 5555			50 50 50 50	55 55 55 55 55 55 55 55	555 5555 55 55	50505 50505 50505 50505	555 555 555	25 5 5 E
LHLL	(5)		5555 5555 5555 5555	55 55 55 55 55 55 55 55 55 55 55	5555 55 5 55 5 55 5 55 5 55 5	55555 5 5 5 5 5	50 50 55 50 55 50 55 50 55	5 55 5 5 5 5 5			5	55555 5 5 5 5 55555	555555 555555	55 55 55 55 55 55 55 55 55 55 55 55 55	ARABARA G G G G G	20 20 20 20 20 20 20 20 20 20 20 20 20 2
LHLH	(6)		55 5 55 5 5 55	55555 5555 5555 5555 5555	505555 50555 50555 50555	5 5 5 5 5 5 5 5 5	555 5 5 5555 5	5 5 5 5 5 5			55 55	5555 555 555 555 555 555	5 5 5 5 5 5	555 55 55 55 55 55	10 10 10 10 10 10 10 10 10 10 10 10 10 1	
LHHL	(7)			55 55 55 55 55 55 55 55 55	55555 55 5555 5555 5555 5555	* ** *** *** *** *** *** *** *** *** *	555 555 555 555	50 50 50 50 50 50 50 50 50 50 50 50 50 5			55555 55555 55555 5	55555555555555555555555555555555555555	555 5555	55555 55555 55555 55555	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	2000000 200000000000000000000000000000
LHHH	(8)		55	55555 5 5 5 5	5 555 5 555 5 55	**************************************	5555 5 5 5 5 5555 555				55555 55 55	55555 5555 5555 5555 55	55555 5 5 5 5	555 5555 5 5		2000 B
HLLL	(1)		5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	55 55 55 55 55 55 55 55 55 55 55 55 55	55 55 55 55 55 55 55 55 55 55 55 55 55		55 55 55 55 55 55 55 55 55	5 5			5 5 5 5 5	55 55 5 5 5 5 5 5	5555 555 555 555	60 60 60 60 60 60 60 60 60 60 60 60 60 6	5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	55555 5555 5555
HLLH	(2)		5 5 5 5	555 555 555 555 555 55		**************************************		5 5 5 5 5 5 5 5 5 5 5			55 55 55 55 55 55 55 55 55 55 55 55 55	5555 5 55 5 55 5 55	9 9 9 9 9			desta de de de de destadados
HLHL	(3)		5 5 5 5 5 5 5 5 5	55 55 55 55		55555 5 5 5 5 555555	5 5 5 5 5 5	55555 5 5 55555			555555 50 50 50555	55555 55 55 55 55555	5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	5 5 5 5 5 5 5 5		****
нгнн	(4)		5) 5) 5) 5) 5) 5) 5)	55 55 55 5	5 5 5 5 5 5 5 5 5 5	80 명 80 명 80 명 80 명 80 명 80 명	55 55 55 55 55 55 55 55 55 55 55 55 55	9 9 9			5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	555 555 555 555 555 555 555		55555555555555555555555555555555555555	5 5 5 5 5	10 10 10 10 10 10 10 10 10 10 10 10 10 1
HHLL	(5)		55	5 5 5 5	5 5 5 5 5 5 5 5 5 5	5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	55 55 55 55 55	********			5 5 5 5 5 5 5 5 5			55555 5 5 5 5 5 5		
HHLH	(6)		55555	55555 55555	55 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5		55 5 5 5 5 5 5 5 5 5	5555			555 5 5 5555	55555	5 5 5	55 5 5	# # # # # # # # # # # # # # # # # # #	5 55555 5
HHHL	(7)		55 55 55 55 55 55 55 55 55 55 55 55 55		5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	******	5 5 5 5 5 5 5 5 5	5 5 5 5 5			5555 5555 5555	55555 5555 555 555 555	5555 5555 5555	****	SARAN Salan Salan	
нннн	(8)			555 5 5	55 55 55 55 55 55 55 55 55 55 55 55 55	****	555 5 5 5 5 5 5	5 55555 5 5			5 5 5 5 5 5 5	5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	55555 5 5 5 5	55 55 55 55 55 55	20 E	CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES CHARLECHES



### 15. LCD Module Precautions


The precautions below should be followed when using LCD modules to help ensure personal safety, module performance, and compliance of environmental regulations.

#### 15.1. Modules

- Avoid applying excessive shocks to module or making any alterations or modifications to it.
- Do not make extra holes on the printed circuit board, modify its shape or change the components of LCD display module.
- Do not disassemble the LCD display module.
- Do not operate the LCD display module above the absolute maximum rating.
- Do not drop, bend or twist the LCD display module.
- Soldering: only to the I/O terminals.
- Store in an anti-static electricity container and clean environment.
- It is common to use the "screen saver" to extend the lifetime of the LCD display module.
  - Do not use the fixed information for long periods of time in real application.
  - Do not use fixed information in LCD panel for long periods of time to extend "screen burn" effect time.
- Crystalfontz has the right to change the passive components, including R3, R6 & backlight
  adjust resistors. (Resistors, capacitors and other passive components will have different
  appearance and color caused by the different supplier.)
- Crystalfontz have the right to change the PCB Rev. (In order to satisfy the supplying stability, management optimization and the best product performance, etc., under the premise of not affecting the electrical characteristics and external dimensions, Crystalfontz has the right to modify the version.).

## 15.2. Handling Precautions

- Since the display panel is made of glass, do not apply mechanical impacts such as dropping from a high position.
- If the display panel is accidently broken, and the internal organic substance leaks out, be careful not to inhale or touch the organic substance.
- If pressure is applied to the display surface or its neighborhood of the LCD display module, the cell structure may be damaged, so be careful not to apply pressure to these sections.
- The polarizer covering the surface of the LCD display module is soft and can be easily scratched. Please be careful when handling the LCD display module.
- Clean the surface of the polarizer covering the LCD display module if it becomes soiled using following adhesion tape.
  - Scotch Mending Tape No. 810 or an equivalent
  - Never breathe the soiled surface or wipe the surface using a cloth containing solvent such as ethyl alcohol, since the surface of the polarizer will become cloudy.
  - o The following liquids/solvents may spoil the polarizer:
    - Water
    - Ketone
    - Aromatic Solvents
- Hold the LCD display module very carefully when placing the LCD display module into the system housing.
- Do not apply excessive stress or pressure to the LCD display module. And, do not over bend
  the film with electrode pattern layouts. These stresses will influence the display performance.
  Also, be sure to secure the sufficient rigidity for the outer cases.

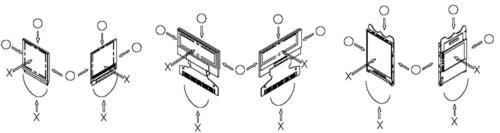



- Do not apply stress to the LSI chips and the surrounding molded sections.
- Do not disassemble or modify the LCD display module.
- Do not apply input signals while the logic power is off.
- Pay sufficient attention to the working environments when handing the LCD display module to prevent occurrence of element breakage accidents by static electricity.
  - o Be sure to make human body grounding when handling LCD display modules.
  - o Be sure to ground tools to use for assembly such as soldering irons.
  - To suppress generation of static electricity, avoid carrying out assembly work under dry environments.
  - Protective film is being applied to the surface of the display panel of the LCD display module. Be careful since static electricity may be generated when exfoliating the protective film.
- Protection film is being applied to the surface of the display panel and removes the protection
  film before assembling it. At this time, if the LCD display module has been stored for a long
  period of time, residue adhesive material of the protection film may remain on the surface of
  the display panel after the film has been removed. In such a case, remove the residue material
  by the method discussed above.
- If electric current is applied when the LCD display module is being dewed or when it is placed
  under high humidity environments, the electrodes may become corroded. If this happens
  proceed with caution when handling the LCD display module.

### 15.3. Storage Precautions

- When storing the LCD display modules put them in static electricity preventive bags to avoid exposure to direct sunlight and fluorescent lamps. Also avoid high temperature and high humidity environments and low temperatures (less than 0°C) environments. (We recommend you store these modules in the packaged state when they were shipped from Crystalfontz). Be careful not to let water drops adhere to the packages or bags, and do not let dew gather on them.
- If electric current is applied when water drops are adhering to the surface of the LCD display
  module the LCD display module may have become dewed. If a dewed LCD display module is
  placed under high humidity environments it may cause the electrodes to become corroded. If
  this happens proceed with caution when handling the LCD display module.

### 15.4. Designing Precautions

- The absolute maximum ratings are the ratings that cannot be exceeded for LCD display module. If these values are exceeded, panel damage may happen.
- To prevent occurrence of malfunctioning by noise pay attention to satisfy the V<sub>IL</sub> and V<sub>IH</sub> specifications and, at the same time, to make the signal line cable as short as possible.
- We recommend that you install excess current preventive unit (fuses, etc.) to the power circuit (V<sub>DD</sub>). (Recommend value: 0.5A)
- Pay sufficient attention to avoid occurrence of mutual noise interference with the neighboring devices.
- As for EMI, take necessary measures on the equipment side.
- When fastening the LCD display module, fasten the external plastic housing section.
- If the power supply to the LCD display module is forcibly shut down, by such errors as taking
  out the main battery while the LCD display panel is in operation, we cannot guarantee the
  quality of this LCD display module.
  - o Connection (contact) to any other potential than the above may lead to rupture of the IC.

### 15.5. Disposing Precautions

 Request the qualified companies to handle the industrial wastes when disposing of the LCD display modules. Or, when burning them, be sure to observe the environmental and hygienic laws and regulations.

### 15.6. Other Precautions

- When an LCD display module is operated for a long period of time with a fixed pattern, the fixed pattern may remain as an after image or a slight contrast deviation may occur.
  - o If the operation is interrupted and left unused for a while, normal state can be restored.
  - o This will not cause a problem in the reliability of the module.



- To protect the LCD display module from performance drops by static electricity rapture, etc., do not touch the following sections whenever possible while handling the LCD display modules.
  - o Pins and electrodes
  - o Pattern layouts such as the TCP & FPC
- With this LCD display module, the LCD driver is being exposed. Generally speaking, semiconductor elements change their characteristics when light is radiated according to the principle of the solar battery. Consequently, if this LCD driver is exposed to light, malfunctioning may occur.
  - Design the product and installation method so that the LCD driver may be shielded from light in actual usage.
  - Design the product and installation method so that the LCD driver may be shielded from light during the inspection processes.
- Although this LCD display module stores the operation state data by the commands and the
  indication data, when excessive external noise, etc. enters into the module, the internal status
  may be changed. Therefore, it is necessary to take appropriate measures to suppress noise
  generation or to protect from influences of noise on the system design.
- We recommend that you construct its software to make periodical refreshment of the operation statuses (re-setting of the commands and re-transference of the display data), to cope with catastrophic noise.
- Resistors, capacitors, and other passive components will have different appearance and color caused by the different supplier.
- Crystalfontz has the right to upgrade and modify the product function.
- The limitation of FPC bending:

