


ELECTRICAL PROPERTIES

1. ANY OPEN OR MISWIRE SHORT OR INTERMITTENCE ARE NOT PERMITTED
2. CABLE IS ROHS COMPLIANT
3. TEST CONDITION
TEST VOLTAGE DC 300V/0.01S
INSULATION RESISTANCE:10M OHM(MIN)
CONDUCTION RESISTANCE:3 OHM(MAX)



5	Shore A90 PVC COLOR:BLACK	
4	INNER MOLD:PE	
3	MICRO USB B 5P MALE MOLDED TYPE PIN:G/F LCP NIKEL PLATED SHELL	1pc
2	USB ATYPE MALE PIN:G/F WHITE INSULATION	1pc
1	UL2725 28AWG/1P+28AWG/2C+AEB OD:5.0±0.1mm JACKET COLOR:BLACK	1pc
NO.	DESCRIPTION	QTY

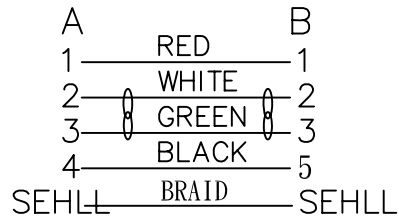