



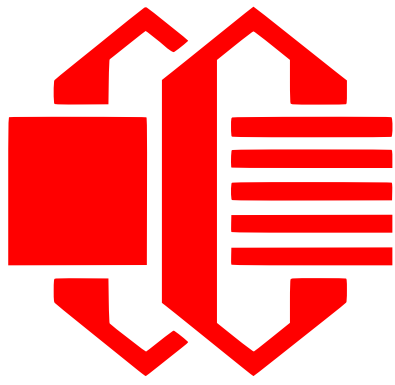

Getting Started Guide

Bring up the CFAL12832N0-022W or CFAL12832N0-022Y using the Generic Adapter Board CFA10102

Configured for I2C

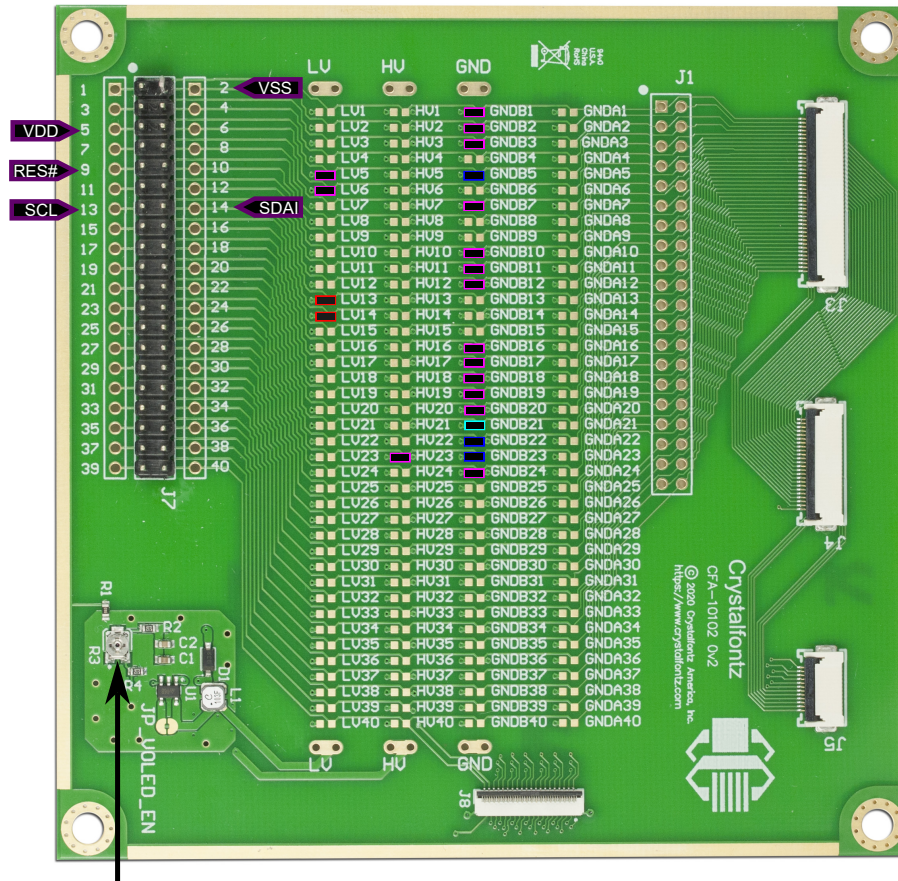

Color Guide

- 0Ω Resistor (qty 16)
- 480kΩ Resistor (qty 1)
- 4.7kΩ Resistor (qty 2)
- 4.7uF Capacitor (qty 3)
- ➡ Input from 3v3 controller

Adjust the HV loop here to provide the high voltage (V_{pp} 12-14v)

Solder each position with the corresponding component as specified in the color guide. All land patterns are for 0603 Components.

See the CFAL12832N0-022W or CFAL12832N0-022Y datasheet for information on pin function, electrical characteristics, etc.

Crystalfontz America, Inc

<https://www.crystalfontz.com/product/cfal12832n0022w>

<https://www.crystalfontz.com/product/cfal12832n0022y>