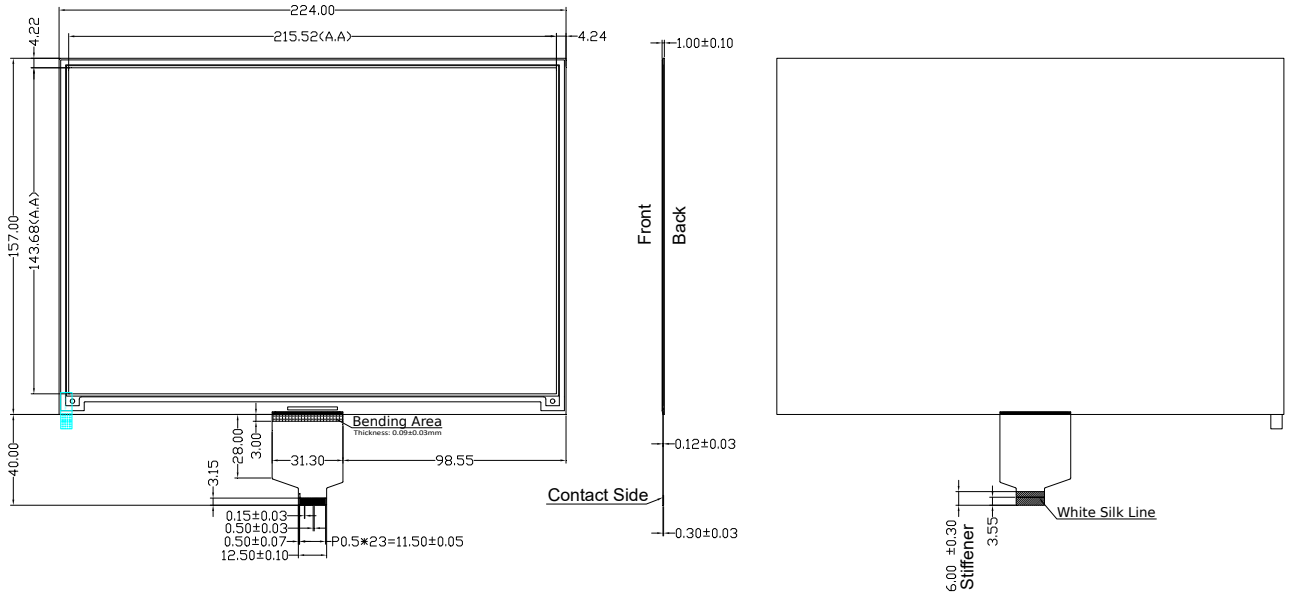


Pin	Description
1	NC
2	GDR
3	RESE
4	NC
5	VSH
6	TSCL
7	TSDA
8	BS1
9	BUSY
10	RES#
11	D/C#
12	CS#
13	SCL
14	SDA
15	VDDIO
16	VCI
17	VSS
18	VDD
19	VPP
20	VSH1
21	VGH
22	VSL
23	VGL
24	VCOM

1. Display mode: 10.2" EPD / Bi-stable / Monochrome
2. Additional Features: Build-in Temp. sensor / SPI
3. Resolution: 960(H)x640(V)
4. Viewing direction: All
5. Driver IC: SSD1677 or Compatible
6. Voltage: Vdd=1.7V-1.9V, Vddio=2.2V-3.7V NOTE: Vdd can be regulated internally from Vddio
7. Frontlight: None
8. Brightness：N/A
9. Operating temperature: 0°C to +50°C
10. Storage temperature: -25°C to +70°C
11. Optimal storage conditions: 22°C±3 / 55%RH±10
12. RoHS compliant

Unspecified Tolerance is ±0.3mm

Crystalfontz

© 2026 Crystalfontz America, Inc.

Part Number:	Date:	Filename:	Revision:
CFAP960640A0-1020	2026-05-15	CFAP960640A01020 Drawing.pdf	1.0
	Web: support.crystalfontz.com		Sheet: 1 of 1